



Shenzhen Smartware Technology Co.,Ltd



Andrew
CEO

Shenzhen Smartware Technology Co. Ltd(Smartware) is now issuing a complete update e-catalog

We are fully aware of it cannot be complete, as always new products are on the way in and others are on the way out.

Still we hope you will find it of value for you and your company.

If you can not find any given related product, ask us and I am sure we can assist you

Smartware is a top professional manufacture / provider of LED Lighting products. Our staff can assist you in choosing the right product to any given task, such as ...Trucks, Cars of any kinds, Forest-, Agriculture- , Mining-, Aftersales for automotive industry and Marine.

Take your time to look through our new e-catalog.
Hopefully this will inspire you to send us an inquiry.
Our website gives you more information on the product itself.

Smartware deliver OEM products of high quality, minimum as required by the customer
Smartwares motto: We do not sell products, we sell solutions
When you come to China, kindly plan to visit us.
See you.

CERTIFICATIONS Part Of The Certifications



English Version



Chinese Version



ET1-B018



ET1-D002



ET1-E017 / ET1-E017C



ET1-A022 / ET1-A022(R-Y-B-C)
ET1-A016 / ET1-A016(R-Y-B-C)




ET1-A015 / ET1-A015(R-Y-B-C)
ET1-A014 / ET1-A014(R-Y)
ET1-A022B / ET1-A030 / ET1-A030A



ET1-E012(A-N-Y-R) / ET1-E013(A-B-Y-R)
ET1-E014(A-B-Y-R) / ET1-E005(A-B-Y-R)
ET1-E006(A-B-Y-R) / ET1-E007(A-B-Y-R)
ET1-E013

TEST EQUIPMENT

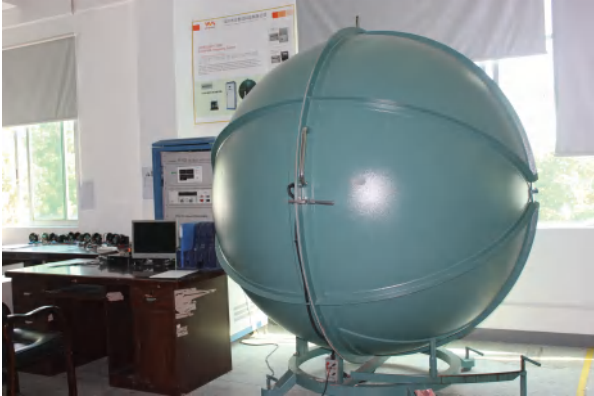


Integrating Sphere Machine



Humidity and Temperature testing equipment



Salt Spray Chamber

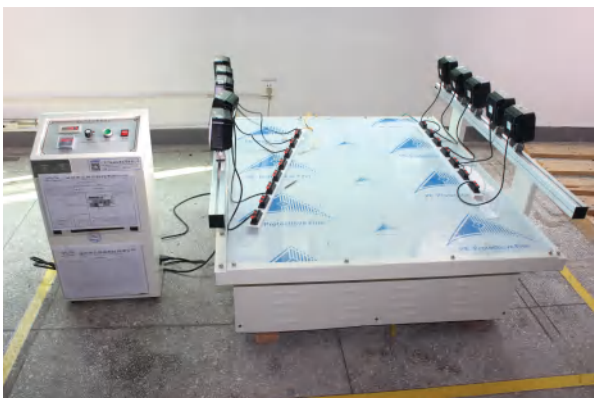

Vibration test



Water-proof test



Henry Wolff
General Manager
Email: Henry@sst-smartware.com



Sunnie Liu
Sales Manager
Email: sunnie@sst-smartware.com



Fogis Liu
Sales Manager
Email: fogis@sst-smartware.com

We are ready to serve
YOU

RECHARGEABLE WORK LIGHTS



Rechargeable Magnetic LED Work Light
 Working Mode: High (100%), Low (30%), SOS flashing
 All colours except Black
 MOQ is 250 pcs



ET1-E001B ET1-E001P ET1-E0010Y ET1-E001R



Adapter
Car charger

ET1-E001

Rechargeable LED Work Light

Model	LED Power	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-E001	15 w (5 pcs x 3 w)	IP 65	DC12-24 V / AC 100-240 V	Flood	6000-6500 K	≥ 2 Years	900 ± 50 lm	Aluminum Heatsink Housing

Rechargeable Magnetic LED Work Light
 Working Mode: High (100%), Low (30%), SOS flashing
 All colours except Black
 MOQ is 250 pcs



USB-A
Type-C



ET1-E017B ET1-E017P ET1-E017Y ET1-E017R

ET1-E017

Rechargeable LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Accessories	Color Temperature	Life Span	Lumens	Material
ET1-E017	5 w (5 pcs x 1 w)	Osram White	IP 65	DC 5 V	Flood	LG+USB-A charging wire	6000-6500 K (Optional)	≥ 2 Years	900 ± 50 LM	Aluminum Heatsink Housing
ET1-E017-9	5 w (5 pcs x 1 w)	Osram White	IP 65	DC 5 V	Flood	LG+Type-C charging wire	6000-6500 K (Optional)	≥ 2 Years	900 ± 50 LM	Aluminum Heatsink Housing
ET1-E017-10	5 w (5 pcs x 1 w)	Osram White	IP 65	DC 5 V	Flood	Yliik+USB-A charging wire	6000-6500 K (Optional)	≥ 2 Years	900 ± 50 LM	Aluminum Heatsink Housing
ET1-E017-11	5 w (5 pcs x 1 w)	Osram White	IP 65	DC 5 V	Flood	Yliik+Type-C charging wire	6000-6500 K (Optional)	≥ 2 Years	900 ± 50 LM	Aluminum Heatsink Housing



Rechargeable Magnetic LED Work Light
 Working Mode: High (100%), Low (30%), SOS flashing
 MOQ is 250 pcs



Adapter
Car charger



ET1-E001C

Rechargeable LED Work Light

Model	LED Power	Emiting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-E001C	15 w (5 pcs x 3 w)	White	IP 65	DC 12-24 V / AC 100-240 V	Flood	6000-6500 K (Optional)	≥ 2 Years	900 ± 50 LM	Aluminum Heatsink Housing

Rechargeable Magnetic LED Work Light
 Working Mode: High (100%), Low (30%), SOS flashing
 MOQ is 250 pcs



ET1-E017C



USB-A

Type-C

Rechargeable LED Work Light

Model	LED Power	Emiting color	IP Degree	Input Voltage	Beam Angle	Accessories	Color Temperature	Life Span	Lumens	Material
ET1-E017C	5 w (5 pcs x 1 w) Osram	White	IP 65	DC 5 V	Flood	LG+USB-A charging wire	6000-6500 K (Optional)	≥ 2 Years	620 ± 50 LM	Aluminum Heatsink Housing
ET1-E017C-6	5 w (5 pcs x 1 w) Osram	White	IP 65	DC 5 V	Flood	LG+Type-C charging wire	6000-6500 K (Optional)	≥ 2 Years	620 ± 50 LM	Aluminum Heatsink Housing
ET1-E017C-7	5 w (5 pcs x 1 w) Osram	White	IP 65	DC 5 V	Flood	Yilik+USB-A charging wire	6000-6500 K (Optional)	≥ 2 Years	620 ± 50 LM	Aluminum Heatsink Housing
ET1-E017C-8	5 w (5 pcs x 1 w) Osram	White	IP 65	DC 5 V	Flood	Yilik+Type-C charging wire	6000-6500 K (Optional)	≥ 2 Years	620 ± 50 LM	Aluminum Heatsink Housing

Rechargeable Magnetic LED Work Light
 Working Mode: High (100%), Low (30%), SOS flashing
 All colours except Black
 MOQ is 250 pcs



ET1-E0220 ET1-E022Y ET1-E022B ET1-E022R

ET1-E022



Rechargeable LED Work Light

Model	LED Power	Emiting color	IP Degree	Input Voltage	Beam Angle	Accessories	Color Temperature	Life Span	Lumens	Material
ET1-E022	18 w (6 pcs x 3 w) CREE	White	IP 65	DC 5 V	Flood	USB-A charging wire	6000-6500 K	≥ 2 Years	1200 ± 50 LM	Aluminum Heatsink Housing
ET1-E022-1	18 w (6 pcs x 3 w) CREE	White	IP 65	DC 5 V	Flood	Type-C charging wire	6000-6500 K	≥ 2 Years	1200 ± 50 LM	Aluminum Heatsink Housing



ET1-E026

Rechargeable Magnetic LED Work Light
 Working Mode: High (100%), Low (30%), SOS flashing
 All colours except Black
 MOQ is 250 pcs



Rechargeable LED Work Light

Model	LED Power	Emiting color	IP Degree	Input Voltage	Beam Angle	Accessories	Color Temperature	Life Span	Lumens	Material
ET1-E026	12 w (1 pcs x 12 w) COB	White	IP 65	DC 5 V	Flood	USB-A charging wire	6000-6500 K	≥ 2 Years	1200 ± 50 LM	Aluminum Heatsink Housing
ET1-E026-1	12 w (1 pcs x 12 w) COB	White	IP 65	DC 5 V	Flood	Type-C charging wire	6000-6500 K	≥ 2 Years	1200 ± 50 LM	Aluminum Heatsink Housing



Rechargeable Magnetic LED Work Light
Working Mode: High (100%), Low (30%), SOS flashing
All colours except Black
MOQ is 250 pcs



ET1-E027

Rechargeable LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Accessories	Color Temperature	Life Span	Lumens	Material
ET1-E027	18 w (6 pcs x 3 w) CREE	White	IP 65	DC 5 V	Flood	USB-A charging wire	6000-6500 K	≥ 2 Years	1200 ± 50 LM	Aluminum Heatsink Housing
ET1-E027-1	18 w (6 pcs x 3 w) CREE	White	IP 65	DC 5 V	Flood	Type-C charging wire	6000-6500 K	≥ 2 Years	1200 ± 50 LM	Aluminum Heatsink Housing

Rechargeable Magnetic LED Work Light
Working Mode: High (100%), Low (30%), SOS flashing
All colours except Black
MOQ is 250 pcs



ET1-E028

Rechargeable LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Accessories	Color Temperature	Life Span	Lumens	Material
ET1-E028	10 w (1 pcs x 10 w) COB	White	IP 65	DC 5 V	Flood	USB-A charging wire	6000-6500 K	≥ 2 Years	1000 ± 100 LM	Aluminum Heatsink Housing
ET1-E028-1	10 w (1 pcs x 10 w) COB	White	IP 65	DC 5 V	Flood	Type-C charging wire	6000-6500 K	≥ 2 Years	1000 ± 100 LM	Aluminum Heatsink Housing

Rechargeable Magnetic LED Work Light
 Working Mode: High (100%), Low (30%), SOS flashing
 All colours except Black
 MOQ is 250 pcs



ET1-E010O ET1-E010Y ET1-E010B ET1-E010R




ET1-E010

Rechargeable LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Accessories	Color Temperature	Life Span	Lumens	Material
ET1-E010	10 w (1 pcs x 10 w) COB	White	IP 65	DC 5 V	Flood	Type-C charging wire	6000~6500 K	≥ 2 Years	1000 ± 50 LM	Aluminum Heatsink Housing



Rechargeable Magnetic LED Work Light
 Working Mode: High (100%), Low (30%), SOS flashing

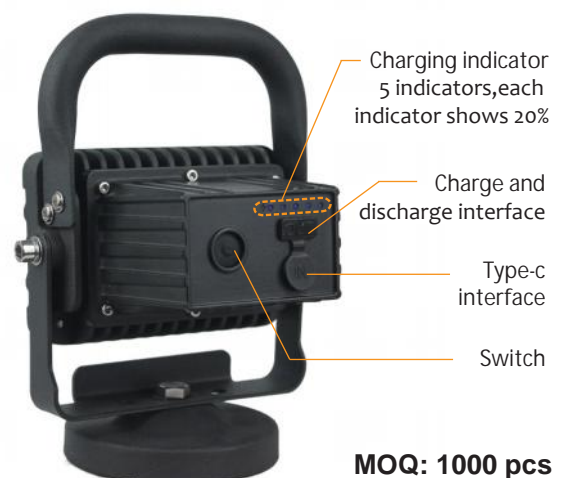

ET1-E031

MOQ: 1000 pcs

Rechargeable LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Accessories	Color Temperature	Life Span	Lumens	Material
ET1-E031	18 w (6 pcs x 3 w) CREE	White	IP 65	DC 5 V	Flood	Type-C charging wire	6000~6500 K	≥ 2 Years	1200 ± 50 LM	Aluminum Heatsink Housing

Rechargeable Magnetic LED Work Light
 Working Mode: High (100%), Low (30%), SOS flashing
 All colours except Black
 MOQ is 250 pcs



Type C



ET1-E005O

ET1-E005Y

ET1-E005B

ET1-E005R

ET1-E005

Rechargeable LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Accessories	Color Temperature	Life Span	Lumens	Material	
ET1-E005	9 W (3 PCS X 3 W)	Dual Color	White / Red / Yellow / Blue	IP 65	DC 5 V	Flood	Type-C charging wire	3000-6500 K (Optional)	≥ 2 Years	400± 50 LM	Aluminum Heatsink Housing

Rechargeable Magnetic LED Work Light
 Working Mode: High (100%), Low (30%), SOS flashing
 All colours except Black
 MOQ is 250 pcs



ET1-E013O

ET1-E013Y

ET1-E013B

ET1-E013R



Type-C

ET1-E013

Rechargeable LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Accessories	Color Temperature	Life Span	Lumens	Material	
ET1-E013	18 w (6 pcs x 3 w)	CREE LED	White	IP 65	DC 5 V	Flood	Type-C charging wire	6000-6500 K	≥ 2 Years	1200 ± 50 LM	Aluminum Heatsink Housing

Rechargeable Magnetic LED Work Light
 Working Mode: High (100%), Low (30%), SOS flashing
 All colours except Black
 MOQ is 250 pcs



ET1-E011O ET1-E011Y ET1-E011B ET1-E011R



ET1-E011



Rechargeable LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Accessories	Color Temperature	Life Span	Lumens	Material
ET1-E011	10 w (1 pcs x 10 w)	COB LED White	IP 65	DC 5 V	Flood	Type-C charging wire	6000-6500 K	≥ 2 Years	1000 ± 50 LM	Aluminum Heatsink Housing



Rechargeable Magnetic LED Work Light
 Working Mode: High (100%), Low (30%), SOS flashing
 All colours except Black
 MOQ is 250 pcs



ET1-E014O ET1-E014Y ET1-E014B ET1-E014R

ET1-E014



Rechargeable LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Accessories	Color Temperature	Life Span	Lumens	Material
ET1-E014	18 w (6 pcs x 3 w)	CREE LED White	IP 65	DC 5 V	Flood	Type-C charging wire	6000-6500 K	≥ 2 Years	1200 ± 50 LM	Aluminum Heatsink Housing



Rechargeable Magnetic LED Work Light
 Working Mode: High (100%), Low (30%), SOS flashing
 All colours except Black
 MOQ is 250 pcs



ET1-E007O ET1-E007Y ET1-E007B ET1-E007R

ET1-E007

Rechargeable LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Accessories	Color Temperature	Life Span	Lumens	Material
ET1-E007	9 w (3 pcs x 3 w)	Dual Color Red / Yellow / Blue	IP 65	DC 5 V	Flood	Type-C charging wire	3000-6500 K (Optional)	≥ 2 Years	330± 50 LM	Aluminum Heatsink Housing

Rechargeable Magnetic LED Work Light
 Working Mode: High (100%), Low (30%), SOS flashing
 All colours except Black
 MOQ is 250 pcs



ET1-E008O ET1-E008Y ET1-E008B ET1-E008R



ET1-E008

Rechargeable LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Accessories	Color Temperature	Life Span	Lumens	Material
ET1-E008	8 w (16 pcs x 0.5 w)	White / Red / Yellow / Blue	IP 65	DC 5 V	Flood	Type-C charging wire	3000-6500 K (Optional)	≥ 2 Years	540 ± 50 LM	Aluminum Heatsink Housing

Rechargeable Magnetic LED Work Light
 Working Mode: High (100%), Low (30%), SOS flashing
 All colours except Black
 MOQ is 250 pcs



ET1-E013C

Rechargeable LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Accessories	Color Temperature	Life Span	Lumens	Material
ET1-E013C	18 w (6 pcs x 3 w) CREE	White	IP 65	DC 5 V	Flood	Type-C charging wire	6000-6500 K	≥ 2 Years	1200 ± 50 LM	Aluminum Heatsink Housing



Rechargeable Magnetic LED Work Light
 Working Mode: High (100%), Low (30%), SOS flashing
 All colours except Black
 MOQ is 250 pcs



ET1-E003O ET1-E003Y ET1-E003B ET1-E003R

ET1-E003


Rechargeable LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Accessories	Color Temperature	Life Span	Lumens	Material
ET1-E003	8 w (16 pcs x 0.5 w)	Dual Color White / Red / Yellow / Blue	IP 65	DC 5 V	Flood	Type-C charging wire	3000-6500 K (Optional)	≥ 2 Years	540 ± 50 LM	Aluminum Heatsink Housing

Rechargeable Magnetic LED Work Light
 Working Mode: High (100%), Low (30%), SOS flashing
 All colours except Black
 MOQ is 250 pcs



ET1-E029O



ET1-E029Y



ET1-E029B



ET1-E029R

ET1-E029

Rechargeable LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Accessories	Color Temperature	Life Span	Lumens	Material
ET1-E029	10 w (1 pcs x 10 w) COB	White	IP 65	DC 5 V	Flood	Type-C charging wire	6000-6500 K	≥ 2 Years	1000 ± 50 LM	Aluminum Heatsink Housing

Rechargeable Magnetic LED Work Light
 Working Mode: High (100%), Low (30%), SOS flashing
 All colours except Black
 MOQ is 250 pcs



ET1-E030O



ET1-E030Y



ET1-E030B



ET1-E030R

ET1-E030



Rechargeable LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Accessories	Color Temperature	Life Span	Lumens	Material
ET1-E030	10 w (1 pcs x 10 w) COB	White	IP 65	DC 5 V	Flood	Type-C charging wire	6000-6500 K (Optional)	≥ 2 Years	800 ± 100 LM	Aluminum Heatsink Housing

Rechargeable Magnetic LED Work Light
 Working Mode: High (100%), Low (30%), SOS flashing
 All colours except Black
 MOQ is 250 pcs



ET1-E004O ET1-E004Y ET1-E004B ET1-E004R



Type-C

ET1-E004

Rechargeable LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Accessories	Color Temperature	Life Span	Lumens	Material
ET1-E004	8 w (16 pcs x 0.5 w)	Dual Color White / Red / Yellow / Blue	IP 65	DC 5 V	Flood	Type-C charging wire	3000-6500 K (Optional)	≥ 2 Years	540 ± 50 LM	Aluminum Heatsink Housing

Rechargeable Magnetic LED Work Light
 Working Mode: High (100%), Low (30%), SOS flashing
 All colours except Black
 MOQ is 250 pcs



ET1-E006O ET1-E006Y ET1-E006B ET1-E006R



Type-C

ET1-E006

Rechargeable LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Accessories	Color Temperature	Life Span	Lumens	Material
ET1-E006	9 w (3 pcs w 3 w)	Dual Color White / Red / Yellow / Blue	IP 65	DC 5 V	Flood	Type-C charging wire	3000-6500 K (Optional)	≥ 2 Years	400 ± 50 LM	Aluminum Heatsink Housing

Rechargeable Magnetic LED Work Light
 Working Mode: High (100%), Low (30%), SOS flashing
 All colours except Black
 MOQ is 250 pcs



ET1-E009O ET1-E009Y ET1-E009B ET1-E009R



ET1-E009



Rechargeable LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Accessories	Color Temperature	Life Span	Lumens	Material
ET1-E009	10 w (1 pcs x 10 w) COB	White	IP 65	DC 5 V	Flood	Type-C charging wire	6000-6500 K	≥ 2 Years	1000 ± 50lm	Aluminum Heatsink Housing

Rechargeable Magnetic LED Work Light
 Working Mode: High (100%), Low (30%), SOS flashing
 All colours except Black
 MOQ is 250 pcs



ET1-E012O ET1-E012Y ET1-E012B ET1-E012R

ET1-E012



Rechargeable LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Accessories	Color Temperature	Life Span	Lumens	Material
ET1-E012	18 w (6 pcs x 3 w) CREE	White	IP 65	DC 5 V	Flood	Type-C charging wire	6000-6500 K	≥ 2 Years	1200 ± 50 LM	Aluminum Heatsink Housing

Rechargeable Magnetic LED Work Light
Working Mode: High (100%), Low (30%), SOS flashing



Adapter
Car charger



ET1-E033

Rechargeable LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Accessories	Color Temperature	Life Span	Lumens	Material
ET1-E033	15 w (5 pcs x 3 w)	White	IP 65	DC 5 V	Flood	USB-C charging wire	6000-6500 K (Optional)	≥ 2 Years	900 LM	Aluminum Heatsink Housing

Rechargeable Magnetic LED Work Light
Working Mode: High (100%), Low (30%), SOS flashing
All colours except Black
MOQ is 250 pcs



ET1-E005Y



Type C

Rechargeable LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Accessories	Color Temperature	Life Span	Lumens	Material
ET1-E005Y	9 W (3 PCS X 3 W)	Dual Color White / Red / Yellow / Blue	IP 65	DC 5 V	Flood	Type-C charging wire	3000-6500 K (Optional)	≥ 2 Years	330± 50 LM	Aluminum Heatsink Housing

Rechargeable Magnetic LED Work Light
 Working Mode: High (100%), Low (30%), SOS flashing
 All colours except Black
 MOQ is 250 pcs



ET1-E005A



Rechargeable LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Accessories	Color Temperature	Life Span	Lumens	Material
ET1-E005A	9 W (3 PCS X 3 W)	Dual Color White / Red / Yellow / Blue	IP 65	DC 5 V	Flood	Type-C charging wire	3000-6500 K (Optional)	≥ 2 Years	330± 50 LM	Aluminum Heatsink Housing

Rechargeable Magnetic LED Work Light
 Working Mode: High(100%), Low(50%), SOS, FLASH
 All colours except Black
 MOQ is 250 pcs



AC power supply



DC car plug



ET1-E032

Rechargeable LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Accessories	Color Temperature	Life Span	Lumens	Material
ET1-E032	27 w (9 pcs x 3 w)	White	IP 65	DC 5 V	Flood	AC power supply DC car plug	3000-6500 K (Optional)	≥ 2 Years	1620 LM	ABS

Rechargeable Magnetic LED Work Light
 Working Mode: High(100%), Low(30%), SOS, Flash



ET1-E034

Rechargeable LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Accessories	Color Temperature	Life Span	Lumens	Material
ET1-E034	10 w (1 pcs x 10 w)	White	IP 65	DC 3.7 V	Flood	USB-C charging wire	6000-6500 K (Optional)	≥ 2 Years	1000 ± 500 LM	ABS

LED WORK LIGHTS





ET1-A001B ET1-A001Y ET1-A001R



ET1-A001

LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-A001	15 w (5 pcs x 3 w)	White	IP 67	DC12-36 V	Flood	6000-6500 K	≥ 2 Years	900 LM	Aluminum Heatsink Housing



ET1-A002

LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-A002	18 w(6 pcs X 3 w)	White	IP 67	6000-6500 K	Spot	6000-6500 K	≥ 2 Years	1200 LM	Aluminum Heatsink Housing



ET1-A001A

LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-A001A	15 w (5 pcs x 3 w)	White	IP 67	DC12-36 V	Flood	6000-6500 K	≥ 2 Years	900 LM	Aluminum Heatsink Housing



ET1-A001C

LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-A001C	15 w (5 pcs x 3 w)	White	IP 67	DC12-36 V	Flood	6000-6500 K	≥ 2 Years	900 LM	Aluminum Heatsink Housing



ET1-A001D

LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-A001D	15 w (5 pcs x 3 w)	White	IP 67	DC12-36 V	Flood	6000-6500 K	≥ 2 Years	900 LM	Aluminum Heatsink Housing



ET1-A042

LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-A042	18 w (6 pcs x 3 w)	White light + Lighting flash/steady on	IP 67	DC 10-80 V	Flood	6000-6500 K	≥ 2 Years	1800 LM	Aluminum



ET1-A003

LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-A003	27w (9 pcs x 3 w)	White	IP 67	6000-6500 K	Flood	6000-6500 K	≥ 2 Years	1620 LM	Aluminum Heatsink Housing



ET1-A004Y ET1-A004R ET1-A004B

ET1-A004

LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-A004	27 w (9 pcs x 3 w)	White	IP 67	DC12-36 V	Flood	6000-6500 K	≥ 2 Years	1620 LM	Aluminum Heatsink Housing



ET1-A005

LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-A005	24 w (8 pcs x 3 w)	White	IP 67	DC 10-30 V	Spot / Flood	6000-6500 K	≥ 2 Years	1350 LM	Aluminum Heatsink Housing



ET1-A006-3

LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-A006-3	24 w (8 pcs x 3 w)	White	IP 67	DC 10-30 V	Spot / Flood	6000-6500 K	≥ 2 Years	1350 LM	Aluminum Heatsink Housing



ET1-A007R

ET1-A007B

ET1-A007

LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-A007	10 w (2 pcs x 5 w) CREE LED	Blue	IP 67	DC 9-50 V	Spot		≥ 2 Years	1400 LM	Aluminum Heatsink Housing



ET1-A008

LED Work Light

Model	LED Power	Emitting color	I Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-A008	10 w (1 pcs x 10 w) CREE LED	White	IP 67	DC 9-60 V	Spot	6000-6500 K	≥ 2 Years	720 LM	Aluminum Heatsink Housing



ET1-A009

LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-A009	18 w (6 pcs X 3 w)	White	IP 67	DC 10-30 V	Flood	6000-6500 K	≥ 2 Years	1200 LM	Aluminum Heatsink Housing



ET1-A010

LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-A010	12 w (4 pcs x 3 w) CREE LED	White / Red / Yellow / Blue	IP 67	DC 10-30 V	Flood	6000-65000 K	≥ 2 Years	800 LM	Aluminum Heatsink Housing



ET1-A011

LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-A011	18 w (6pcs x 3 w)	White	IP 67	DC 9-50 V	Flood	6000-6500 K	≥ 2 Years	1620 LM	Aluminum Heatsink Housing

All colours except Black
MOQ is 250 pcs



ET1-A016O

ET1-A016Y

ET1-A016B

ET1-A016R

ET1-A016

LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-A016	15 w (5 pcs x 3 w)	White	IP 67	DC 12-60 V	Spot / Flood	6000-6500 K	≥ 2 Years	900 ± 100 LM	Aluminum Heatsink Housing



ET1-A017H

LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-A017H	15 w (5 pcs x 3 w)	White	IP 67	DC 9-60 V	Spot	6000-6500 K	≥ 2 Years	720 LM	Aluminum Heatsink Housing



ET1-A021

LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1A021	5 x 1 w	White	IP 67	DC 12-36 V	Spot / Flood	6500 K	≥ 2 Years	300 LM	Aluminum Heatsink Housing

All colours except Black
MOQ is 250 pcs



ET1-A022O



ET1-A022Y



ET1-A022B



ET1-A022R



ET1-A022

LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-A022	25 w (5 pcs x 5 w) CREE	White	IP 67	DC 12-60 V	Flood	6000-6500 K	≥ 2 Years	2000 LM	Aluminum Heatsink Housing



ET1-A023

LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-A023	27 w (9 pcs x 3 w) CREE	White	IP 67	DC 10-30 V	Flood	6000-6500 K	≥ 2 Years	1800 LM	Aluminum Heatsink Housing



ET1-A026

LED Work Light

Model	LED Power	Emiting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-A026	24 w (8 pcs x 3 w) Bridgelux	White	IP 67	DC 10-30 V	Flood	6000-6500 K	≥ 2 Years	1600 LM	Aluminum Heatsink Housing

All colours except Black
MOQ is 250 pcs



ET1-A030O ET1-A030Y ET1-A030B ET1-A030R



ET1-A030

LED Work Light

Model	LED Power	Emiting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-A030	18 w (6 pcs x 3 w) CREE	White	IP 67	DC 12-36 V	Flood	6000-6500 K	≥ 2 Years	1000 ± 50 LM	Aluminum Heatsink Housing

All colours except Black
MOQ is 250 pcs



ET1-A031O ET1-A031Y ET1-A031B ET1-A031R



ET1-A031

LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-A031	10 w (1 pcs x 10 w) COB LED	White	IP 67	DC 12-36 V	Flood	6000-6500 K	≥ 2 Years	1200 ± 50 LM	Aluminum Heatsink Housing



All colours except Black
MOQ is 250 pcs



ET1-A041O ET1-A041Y ET1-A041B ET1-A041R

ET1-A041

LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-A041	15 w (3 pcs x 5 w) High intensity	White	IP 67	DC 12-60 V	Flood	6000-6500 K	≥ 2 Years	1200 ± 50 LM	Aluminum Heatsink Housing



ET1-A036

ET1-A036-1

LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-A036-1	12 w (4 pcs x 3 w)	White	IP 67	DC 10-30 V	Flood	6000-6500 K	≥ 2 Years	1200 ± 50 LM	Aluminum Heatsink Housing
ET1-A036	12 w (4 pcs x 3 w)	White	IP 67	DC 10-30 V	Flood	6000-6500 K	≥ 2 Years	800 LM	Aluminum Heatsink Housing



ET1-A037

LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-A037	20 w (2 pcs x 10 w) CREE	White	IP 67	DC 10-30 V	Flood	6000-6500 K	≥ 2 Years	540 ± 50 LM	Aluminum Heatsink Housing



ET1-B001

LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-B001	48 w (16 pcs x 3 w)	White	IP 67	DC 10-36 V	Flood	6000-6500 K	≥ 2 Years	3360 LM	Aluminum Heatsink Housing



ET1-B006

LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-B006	33 w (11 pcs x 3 w) CREE LED	White	IP 67	DC 12-36 V	Flood / Spot	6000-6500 K	≥ 2 Years	2200 LM	Aluminum Heatsink Housing



ET1-B007

LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-B007	45 w (15 pcs x 3 w) CREE LED	White	IP 67	DC 12-36 V	Flood / Spot	6000-6500 K	≥ 2 Years	3000 LM	Aluminum Heatsink Housing



ET1-B018

LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-B018	40 w (8 pcs x 5 w) CREE	White	IP 67	DC 9-36 V	Flood	6000-6500 K	≥ 2 Years	3360 LM	Aluminum Heatsink Housing



ET1-B020

LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-B020	30 w (3 pcs x 10 w)HP50	White	IP 67	DC 9-36 V	Flood	6000 K	≥ 2 Years	2700 LM	Aluminum Heatsink Housing



ET1-C001

LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-C001	80 w (8 pcs x 10 w) CREE LED	White	IP 67	DC 9-40 V	Flood / Spot	6500 K	≥ 2 Years	5400 LM	Aluminum Heatsink Housing



ET1-C002

LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-C002	60 w (6 pcs x 10 w) CREE LED	White	IP 68	DC 10-30 V	Flood / Spot	6000 K	≥ 2 Years	6000 LM	Aluminum Heatsink Housing



ET1-C003

LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-C003	70 w (7 pcs x 10 w) CREE	White	IP 67	DC 9-60 V	Flood / Spot	6500 K	≥ 2 Years	4760 LM	Aluminum Heatsink Housing



ET1-C004

LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-C004	60 w (6 pcs x 10 w)	White	IP 67	DC 9-60 V	Spot / Flood	6000 K	≥ 2 Years	4080 LM	Aluminum Heatsink Housing



ET1-C005

LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-C005	60 w (12 pcs x 5 w)	White	IP 67	DC 9-40 V	Spot / Flood	6500 K	≥ 2 Years	4050 LM	Aluminum Heatsink Housing



ET1-C006

LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-C006	90 w (9 pcs x 10 w)CREE	White	IP 68	DC 10-30 V	Flood / Spot	6000 K	≥ 2 Years	8100 LM	Aluminum Heatsink Housing



ET1-C011

LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-C011	20 w (4 pcs x 5 w)Osram	White	IP68 & IP69K	DC 9-36 V	Spot 10°	6000-6500 K	≥ 2 Years	1134 LM	Aluminum Heatsink Housing



ET1-C012

LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-C012	40 w (4 pcs x 10 w)Osram	White	IP68 & IP69K	DC 9-36 V	Spot 10°	6000-6500 K	≥ 2 Years	2250 LM	Aluminum Heatsink Housing



ET1-C013

LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-C013	40 w (4 pcs x 10 w)Osram	White	IP68 & IP69 K	DC 9-36 V	Spot 10° / Flood 150 °	6000-6500 K	≥ 2 Years	1763 LM	Aluminum Heatsink Housing



ET1-C014

LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-C014	100 w (20 pcs x 5 w)	Osram White	IP68 & IP69K	DC 10-30 V	Spot 10° / Flood 150°	6000 ~ 6500 K	≥ 2 Years	5314 LM	Aluminum Heatsink Housing



ET1-C049

LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-C049	41 w	White	IP 67	DC 12-80 V	Flood	6000-6500 K	≥ 2 Years	4100 LM	Aluminum Heatsink Housing



ET1-C050

LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-C050	27 w	White	IP 67	DC 12-80 V	Flood	6000-6500 K	≥ 2 Years	2700 LM	Aluminum Heatsink Housing



ET1-C051

LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-C051	27 w	White	IP 67	DC 12-80 V	Flood	6000-6500 K	≥ 2 Years	2700 LM	Aluminum Heatsink Housing



ET10-B061

LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET10-B061	100 w (16 pcs x 6.25 w)	White	IP 65	AC 85 - 265 V DC 12 / 24 V	Flood	6000-6500 K	≥ 2 Years	12000 LM	Aluminum Heatsink Housing



ET2-C009

LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET2-C009	108 w (36 pcs x 3 w)	White	IP 67	DC 9-32 V	Spot / Flood	6000-6500 K	≥ 2 Years	1600 LM	Aluminum Heatsink Housing



ET2-C010

LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET2-C010	108 w (36 pcs x 3 w)	White	IP 67	DC 9-32 V	Spot / Flood	6000-6500 K	≥ 2 Years	1600 LM	Aluminum Heatsink Housing



ET5-B014R



ET5-B014B



ET5-B014

LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET5-B014	27 w	Blue / Red	IP 67	DC 10-80 V	Flood	5000 K	≥ 5 Years	800 LM	Aluminum Heatsink Housing



ET5-B015R



ET5-B015B

ET5-B015

LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET5-B015	18 w	Blue / Red	IP 67	DC 10-80 V	Flood	5000 K	≥ 5 Years	800 LM	Aluminum Heatsink Housing



ET5-H009

LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET5-H009	80 w (4 pcs x 20 w)	White	IP 67	DC 10-30 V	Spot	6000-6500 K	≥ 2 Years	6400 LM	Aluminum Heatsink Housing



ET5-H010

LED Work Light

Model	LED Power	Emiting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET5-H010	30 W (2 pcs x 15 w)	White	IP 67	DC 10-30 V	Spot	6000-6500 K	≥ 2 Years	2400 LM	Aluminum Heatsink Housing



ET5-H011Y

ET5-H011

LED Work Light

Model	LED Power	Emiting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET5-H011Y	45 w (3 pcs x 15 w)	Yellow	IP 65	DC 10-30 V	Spot / Flood	6000 K	≥ 2 Years	3600 LM	Aluminum Heatsink Housing
ET5-H011	45 w (3 pcs x 15 w)	White	IP 65	DC 10-30 V	Spot / Flood	6000 K	≥ 2 Years	3600 LM	Aluminum Heatsink Housing



ET5-H012Y

ET5-H012

LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET5-H012	25 w (1 pcs x 25 w) CREE	White / Amber	IP 67	DC 10-30 V	Flood	6000 K	≥ 2 Years	2000 LM	Aluminum Heatsink Housing



ET5-H013

LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET5-H013	25 w (1 pcs x 25 w) CREE	White	IP 67	DC 10-30 V	Flood / Spot	6000-6500 K	≥ 2 Years	2000 LM	Aluminum Heatsink Housing



ET6-A001

LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET6-A001	30 w (1 pcs x 30 w) COB LED	White	IP 65	AC 85 - 365 V DC 12 / 24 V	Spot / Flood	2700~7000 K (Optional)	≥ 2 Years	2250 LM	Aluminum Heatsink Housing



ET6-A002R

ET6-A002Y

ET1-A002B

ET1-A002G

ET6-A002

LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET6-A002	10 w (1 pcs x 10 w) COB LED	White	IP 65	AC 85 - 365 V DC 12 / 24 V	Spot / Flood	2700~7000 K (Optional)	≥ 2 Years	650 LM	Aluminum Heatsink Housing



ET6-A003

LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET6-A003	20w (1 pcs x 20 w) COB LED	White	IP 65	AC 85 - 365 V DC 12 / 24 V	Spot / Flood	2700-7000 K (Optional)	≥ 2 Years	1400 LM	Aluminum Heatsink Housing



ET6-B001

LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET6-B001	30 w	White	IP 65	AC 110 - 240 V	Flood	3000-6000 K	≥ 2 Years	2100 - 2250 lm	ABS industrial plastics



ET6-B002

LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET6-B002	50 w	White	IP 65	AC 110 - 240 V	Flood	3000-6000 K	≥ 2 Years	3500 - 3750 lm	ABS industrial plastics



ET6-B003

LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET6-B003	10 w	White	IP 65	AC 110 - 240 V	Flood	3000-6000 K	≥ 2 Years	600 - 650 lm	ABS industrial plastics



ET6-B004



LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET6-B004	20 w	White	IP 65	AC 110 - 240 V	Flood	3000-6000 K	≥ 2 Years	1300 - 1400 lm	ABS industrial plastics



ET1-C082



LED Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-C082	40 w	White / Yellow	IP 68	AC 12 - 24 V	Sport	6000-6500 K	50000H+	7800lm	Aluminium die casting


ET1-H001DC



ET1-H002DC



Portable LED Work Lights DC models

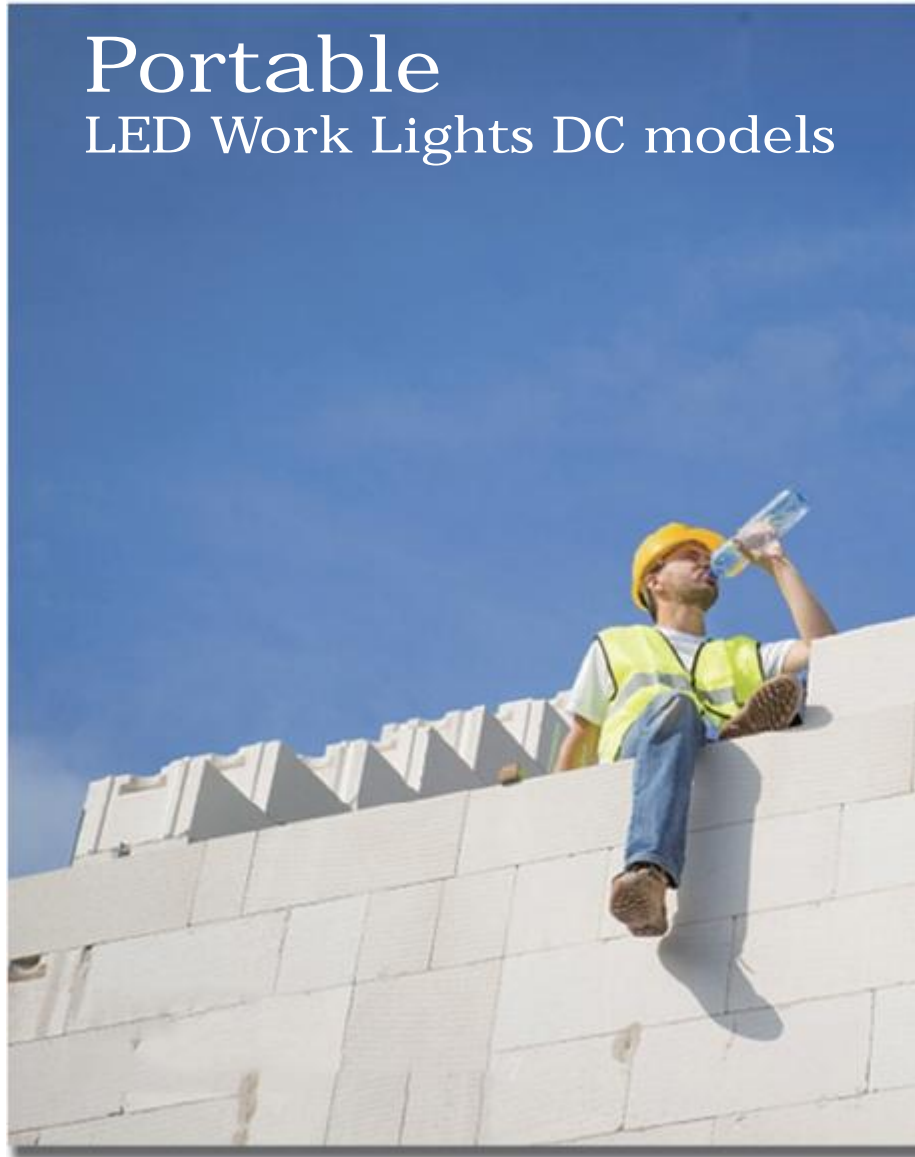

ET1-H003DC



LED Clip Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-H001DC	27 w (9 pcs x 3 w)	White	IP 67	DC11-36 V / 36-60 V	Flood	3000-6500 K (Optional)	≥ 2 Years	1600 LM	Aluminum Heatsink Housing
ET1-H002DC	27 w (9 pcs x 3 w)	White	IP 67	DC11-36 V / 36-60 V	Flood	3000-6500 K (Optional)	≥ 2 Years	1600 LM	Aluminum Heatsink Housing
ET1-H003DC	18 w (6 pcs x 3 w)	White	IP 67	DC12-36 V / 36-60 V	Flood	3000-6500 K (Optional)	≥ 2 Years	1200 LM	Aluminum Heatsink Housing



ET1-F001DC

LED DC Work Light

Model	LED Power	Emiting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-F001DC	27 w (9 pcs x 3 w)	White	IP 68	AC 85 - 265 V	Spot / Flood	3000-6500 K (Optional)	≥ 2 Years	1600 LM	Aluminum Heatsink Housing



ET1-F002DC

LED DC Work Light

Model	LED Power	Emiting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-F002DC	27 w (9 pcs x 10 w)	White	IP 65	DC 12-36 V / 36-60 V	Spot / Flood	6000-6500 K (Optional)	≥ 2 Years	1600lm	Aluminum Heatsink Housing



ET1-F003DC

LED DC Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-F003DC	18 w (6 pcs x 3 w) CREE LED	White	IP 65	DC 12-36 V / 36-60 V	Spot / Flood	6000-6500 K (Optional)	≥ 2 Years	1200 LM	Aluminum Heatsink Housing



ET1-F004B

ET1-F004Y

ET1-F004R



ET1-F004DC

LED DC Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-F004DC	15 w (5 pcs x 3 w)	White	IP 67	DC 12-36 V / 36-60 V	Spot / Flood	3000-6500 K (Optional)	≥ 2 Years	900 LM	Aluminum Heatsink Housing

ET1-H004DC



ET1-H005DC



ET1-H006DC



ET1-H007DC



LED Clip Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-H004DC	15 w (5 pcs x 3 w)	White	IP 67	DC12-36 V / 36-60 V	Flood	3000-6500 K (Optional)	≥ 2 Years	900 LM	Aluminum Heatsink Housing
ET1-H005DC	18 w (6 pcs x 3 w)	White	IP 67	DC12-36 V / 36-60 V	Flood	3000-6500 K (Optional)	≥ 2 Years	1200 LM	Aluminum Heatsink Housing
ET1-H006DC	27 w (9 pcs x 3 w)	White	IP 67	DC12-36 V / 36-60 V	Flood	3000-6500 K (Optional)	≥ 2 Years	1600 LM	Aluminum Heatsink Housing
ET1-H007DC	27 w (9 pcs x 3 w)	White	IP 67	DC12-36 V / 36-60 V	Flood	3000-6500 K (Optional)	≥ 2 Years	1600 LM	Aluminum Heatsink Housing

Portable LED Work Lights AC models



ET1-H004AC



ET1-H005AC



ET1-H006AC



ET1-H007AC



LED Clip Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-H004AC	15 w (5 pcs x 3 w)	White	IP 67	AC85-265 V	Flood	3000-6500 K (Optional)	≥ 2 Years	900 LM	Aluminum Heatsink Housing
ET1-H005AC	18 w (6 pcs x 3 w)	White	IP 67	AC85-265 V	Flood	3000-6500 K (Optional)	≥ 2 Years	1200 LM	Aluminum Heatsink Housing
ET1-H006AC	27 w (9 pcs x 3 w)	White	IP 67	AC85-265 V	Flood	3000-6500 K (Optional)	≥ 2 Years	1600 LM	Aluminum Heatsink Housing
ET1-H007AC	27 w (9 pcs x 3 w)	White	IP 67	AC85-265 V	Flood	3000-6500 K (Optional)	≥ 2 Years	1600 LM	Aluminum Heatsink Housing



ET1-G001AC

LED AC Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-G001AC	18 w (6 pcs x 10 w)	White	IP 67	AC 110 - 240 V	Flood	6000-6500 K (Optional)	≥ 2 Years	1200 LM	Aluminum Heatsink Housing



ET1-G002AC

LED AC Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-G002AC	27 w (9 pcs x 3 w)	White	IP 65	AC 110 - 240 V	Spot / Flood	6000-6500 K (Optional)	≥ 2 Years	1500 LM	Aluminum Heatsink Housing



ET1-G003AC

LED AC Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-G003AC	27 w (9 pcs x 3 w)	White	IP 65	AC 110 - 240 V	Spot / Flood	6000-6500 K (Optional)	≥ 2 Years	1600 LM	Aluminum Heatsink Housing

LED ECONOMY - WORK LIGHTS





ET1-C016

LED Economy - Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-C016	12 w 3030SMD	White	IP 67	DC 9-32 V	Flood	6000K	≥ 2 Years	1050 LM	Aluminum Heatsink Housing



ET1-C017

LED Economy - Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-C017	12 w 3030SMD	White	IP 67	DC 9-32 V	Flood	6000K	≥ 2 Years	1000 LM	Aluminum Heatsink Housing



ET1-C018

LED Economy - Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-C018	16 w 3030SMD	White	IP 67	DC9-32 V	Flood	6000 K	≥ 2 Years	2000 LM	Aluminum Heatsink Housing



ET1-C019

LED Economy - Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-C019	16 w 3030SMD	White	IP 67	DC9-32 V	Flood	6000 K	≥ 2 Years	1500 LM	Aluminum Heatsink Housing



ET1-C020

LED Economy - Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-C020	24 w 3030SMD	White	IP 67	DC9-32 V	Flood	6000 K	≥ 2 Years	2500 LM	Aluminum Heatsink Housing



ET1-C021

LED Economy - Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-C021	24 w 3030SMD	White	IP 67	DC9-32 V	Flood	6000 K	≥ 2 Years	2500 LM	Aluminum Heatsink Housing



ET1-C022

LED Economy - Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-C022	15 w 3030SMD	White	IP 67	DC10-30 V	Flood	6000 K	≥ 2 Years	1000 LM	Aluminum Heatsink Housing



ET1-C023

LED Economy - Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-C023	13 w 3030SMD	White	IP 67	DC10-30 V	Flood	6000 K	≥ 2 Years	1250 LM	Aluminum Heatsink Housing



ET1-C024

LED Economy - Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-C024	16 w 3030SMD	White	IP 67	DC10-30 V	Flood	6000 K	≥ 2 Years	1650 LM	Aluminum Heatsink Housing



ET1-C025

LED Economy - Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-C025	18 w 3030SMD	White	IP 67	DC10-30 V	Flood	6000 K	≥ 2 Years	1700 LM	Aluminum Heatsink Housing



ET1-C026

LED Economy - Work Light

Model	LED Power	Emiting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-C026	27 w 3030SMD	White	IP 67	DC10-30 V	Flood	6000 K	≥ 2 Years	2600 LM	Aluminum Heatsink Housing



ET1-C027

LED Economy - Work Light

Model	LED Power	Emiting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-C027	18 w 3030SMD	White	IP 67	DC9-32 V	Flood	6000 K	≥ 2 Years	1260 LM	Aluminum Heatsink Housing



ET1-C028

LED Economy - Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-C028	27 w 3030SMD	White	IP 67	DC9-32 V	Spot / Flood	6000 K	≥ 2 Years	1800 LM	Aluminum Heatsink Housing



ET1-C029

LED Economy - Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-C029	27 w 3030SMD	White	IP 67	DC9-32 V	Spot / Flood	6000 K	≥ 2 Years	1800 LM	Aluminum Heatsink Housing



ET1-C030

LED Economy - Work Light

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-C030	48 w	White	IP 67	DC 9-32 V	Spot / Flood	6000-6500 K	≥ 2 Years	3300 LM	Aluminum Heatsink Housing

LED DRIVING & SIGNAL LIGHTS





ET1-C032

LED Driving Lights


Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-C032	Low 10 w / High 31w	White & Yellow	IP 67	DC 12-24 V	Flood	6000-6500 K	≥ 2 Years	3100 LM	Plastics



ET1-C033

LED Driving Lights

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-C033	Low 20 w / High 31w	White & Yellow	IP 67	DC 12-24 V	Flood	6000-6500 K	≥ 2 Years	3100 LM	Plastics

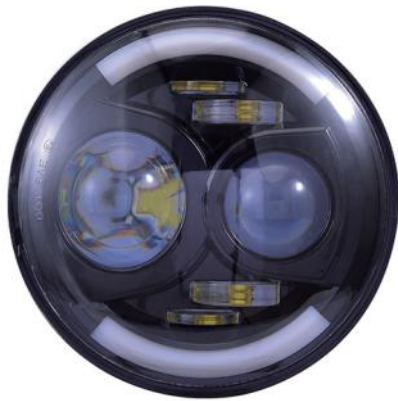

ET1-C034

LED Driving Lights

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-C034	Low 17 w / High 23 w	White & Yellow	IP 67	DC 12-24 V	Flood	6000-6500 K	≥ 2 Years	2300 LM	Plastics



ET1-C035

LED Driving Lights

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-C035	Low 22 w / High 30 w	White & Yellow	IP 67	DC 12-24 V	Flood	6000-6500 K	≥ 2 Years	3000 LM	Plastics



ET1-C036

LED Driving Lights

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-C036	Low 21 w / High 34 w	White & Yellow	IP 67	DC 12-24 V	Flood	6000-6500 K	≥ 2 Years	3400 LM	Plastics



ET1-C037

LED Driving Lights

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-C037	Low 21 w / High 37 w	White & Yellow	IP 67	DC 12-24 V	Flood	6000-6500 K	≥ 2 Years	3700 LM	Plastics



ET1-C038

LED Driving Lights

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-C038	Low 20 w / High 40 w	White & Yellow	IP 67	DC 12-24 V	Flood	6000-6500 K	≥ 2 Years	4000 LM	Plastics



ET1-C039

LED Driving Lights

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-C039	Low 20 w / High 31 w	White & Yellow	IP 67	DC 12-24 V	Flood	6000-6500 K	≥ 2 Years	3100 LM	Plastics



ET1-C040

LED Driving Lights

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-C040	Low 22 w / High 30 w	White & Yellow	IP 67	DC 12-24 V	Flood	6000-6500 K	≥ 2 Years	3000 LM	Plastics



ET1-C041

LED Driving Lights

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-C041	Low 20 w / High 27 w	White & Yellow	IP 67	DC 12-24 V	Flood	6000-6500 K	≥ 2 Years	3000 LM	Plastics



ET1-C042

LED Signal Lights

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-C042	Low 21 w / High 37 w	White & Yellow	IP 67	DC 12-80 V	Flood	6000-6500 K	≥ 2 Years	3700 LM	Plastics



ET1-C043

LED Signal Lights

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-C043	Low 23 w / High 38 w	White & Yellow	IP 67	DC 12-80 V	Flood	6000-6500 K	≥ 2 Years	3800 LM	Aluminum Heatsink Housing



ET1-C044

LED Signal Lights

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-C044	Low 16 w / High 27 w	White & Yellow	IP 67	DC 12-80 V	Flood	6000-6500 K	≥ 2 Years	2700 LM	Aluminum Heatsink Housing



ET1-C045

LED Signal Lights

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-C045	Low 21 w / High 33 w	White & Yellow	IP 67	DC 12-80 V	Flood	6000-6500 K	≥ 2 Years	3300 LM	Plastics



ET1-C046

LED Signal Lights

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-C046	Low 37 w / High 44 w	White & Yellow	IP 67	DC 12-80 V	Flood	6000-6500 K	≥ 2 Years	4400 LM	Plastics



ET1-C047

LED Signal Lights

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-C047	Low 22 w / High 36 w	White & Yellow	IP 67	DC 12-80 V	Flood	6000-6500 K	≥ 2 Years	3600 LM	Plastics



ET1-C048

LED Signal Lights

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-C048	Low 23 w / High 37w	White & Yellow	IP 67	DC 12-80 V	Flood	6000-6500 K	≥ 2 Years	3700 LM	Plastics



ET1-C065

LED Signal Lights

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-C065	Low 30 w / High 42 w	White & Yellow	IP 67	DC 12-80 V	Flood	6000-6500 K	≥ 2 Years	4200 LM	Plastics

LED LIGHT BARS

A LOT TO OFFER



Contact us, as our program of straight and curved LED Light bar is huge. We carry single- and double row LED Light bars in all length.

ET2-A004



LED Light Bar

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Material
ET2-A004	100 w (10 pcs x 10 w) CREE	White	IP 67	DC12-36 V	Flood 60°	6000 ~ 6500 K	≥ 2 Years	Aluminum Heatsink Housing

Contact us, as our program of straight and curved LED Light bar is huge. We carry single- and double row LED Light bars in all length.



ET2-A010

LED Light Bar

Model	LED Power	Emiting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Material
ET2-A010	60 w (6 pcs x 10 w)	CREE White	IP 67	DC 8-70 V	Flood 60°	6000 ~ 6500 K	≥ 2 Years	Aluminum Heatsink Housing

Contact us, as our program of straight and curved LED Light bar is huge. We carry single- and double row LED Light bars in all length.



ET2-A015

LED Light Bar

Model	LED Power	Emiting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Material
ET2-A015	200 w (20 pcs x 10 w)	CREE White	IP 67	DC12-36 V	Flood 60°	6000~6500 K	≥ 2 Years	Aluminum Heatsink Housing

Contact us, as our program of straight and curved LED Light bar is huge. We carry single- and double row LED Light bars in all length.



ET2-A020

LED Light Bar

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Material
ET2-A020	30 w (6 pcs x 5 w) CREE	White	IP 67	DC 9-36 V	Flood 60°	6000-6500 K	≥ 2 Years	Aluminum Heatsink Housing

Contact us, as our program of straight and curved LED Light bar is huge. We carry single- and double row LED Light bars in all length.



ET2-A026

LED Light Bar

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Material
ET2-A026	30 w (6 pcs x 5 w) OSRAM	White	IP 67	DC 9-36 V	Combination of the LED light (concentrated + astigmatism)	6500 K	≥ 2 Years	Aluminum Heatsink Housing

Contact us, as our program of straight and curved LED Light bar is huge. We carry single- and double row LED Light bars in all length.



ET2-A027

LED Light Bar

Model	LED Power	Emiting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Material
ET2-A027	50 w (10 pcs x 5 w)Osram	White	IP 67	DC 9-36 V	Combination of the LED light (concentrated + astigmatism)	6500k	≥2Years	Aluminum Heatsink Housing

Contact us, as our program of straight and curved LED Light bar is huge. We carry single- and double row LED Light bars in all length.



ET2-B001

LED Light Bar

Model	LED Power	Emiting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Material
ET2-B001	36 w (12 pcs x 3 w)CREE	White	IP 67	DC 10-30 V	Flood / Spot	5000-6500 K	≥ 2 Years	Aluminum Heatsink Housing

Contact us, as our program of straight and curved LED Light bar is huge. We carry single- and double row LED Light bars in all length.



ET2-B005

LED Light Bar

Model	LED Power	Emiting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Material
ET2-B005	72 w (24 pcs x 3 w)	White	IP 67	DC10-30 V	Spot / Flood	6000 K	≥ 2 Years	Aluminum Heatsink Housing

Contact us, as our program of straight and curved LED Light bar is huge. We carry single- and double row LED Light bars in all length.



ET2-B014

LED Light Bar

Model	LED Power	Emiting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Material
ET2-B014	36 w (12 pcs x 3 w)	White	IP 67	DC10-30 V	Spot / Flood	6000 K	≥ 2 Years	Aluminum Heatsink Housing

Contact us, as our program of straight and curved LED Light bar is huge. We carry single- and double row LED Light bars in all length.



ET2-B008

LED Light Bar

Model	LED Power	Emiting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Material	
ET2-B008	180 w (60 pcs x 3 w)	Bridgelux	White	IP 67	DC 12 - 36 V / DC63 - 60 V	Flood 60°	6000-6500 K	≥ 2 Years	Aluminum Heatsink Housing

Contact us, as our program of straight and curved LED Light bar is huge. We carry single- and double row LED Light bars in all length.



ET2-B012

LED Light Bar

Model	LED Power	Emiting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Material	
ET2-B012	120 w (40 pcs x 3 w)	Bridgelux	White	IP 67	DC10-30 V	Spot / Flood	6000 K	≥ 2 Years	Aluminum Heatsink Housing

Contact us, as our program of straight and curved LED Light bar is huge. We carry single- and double row LED Light bars in all length.



ET2-B024

LED Light Bar

Model	LED Power	Emiting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Material
ET2-B024	132 w (44 pcs x 3 w)CREE	White	IP 67	DC10-30 V	Spot / Flood	6000-6500 K	≥ 2 Years	Aluminum Heatsink Housing

Contact us, as our program of straight and curved LED Light bar is huge. We carry single- and double row LED Light bars in all length.



ET2-D014

LED Light Bar

Model	LED Power	Emiting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Material
ET2-D014	60 w (6 pcs x 10 w) CREE	White	IP 67	DC 9-32 V	Combo With DRL	6500 K	≥ 2 Years	Aluminum Heatsink Housing

Contact us, as our program of straight and curved LED Light bar is huge. We carry single- and double row LED Light bars in all length.



ET2-D015

LED Light Bar

Model	LED Power	Emiting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Material
ET2-D015	90 w (9 pcs x10 w) OSRAM	White	IP 67	DC 9-32 V	Combo With DRL	6500 K	≥ 2 Years	Aluminum Heatsink Housing

Contact us, as our program of straight and curved LED Light bar is huge. We carry single- and double row LED Light bars in all length.



ET2-D016

LED Light Bar

Model	LED Power	Emiting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Material
ET2-D016	120 w (12 pcs x 10 w) OSRAM	White	IP 67	DC 9-32 V	Combo with DRL	6500 K	≥ 2 Years	Aluminum Heatsink Housing

Contact us, as our program of straight and curved LED Light bar is huge. We carry single- and double row LED Light bars in all length.



ET2-D017

LED Light Bar

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Material
ET2-D017	140 w (6 pcs x 10 w) OSRAM	White	IP 67	DC 9-32 V	Spot / Flood / Combo	6500 K	≥ 2 Years	Aluminum Heatsink Housing

Contact us, as our program of straight and curved LED Light bar is huge. We carry single- and double row LED Light bars in all length.



ET2-D018

LED Light Bar

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Material
ET2-D018	40 w (2pcs x 20 w) CREE	White	IP 67	DC 9-32 V	Spot / Flood / Combo	6500k	≥2Years	Aluminum Heatsink Housing

Contact us, as our program of straight and curved LED Light bar is huge. We carry single- and double row LED Light bars in all length.



ET2-D019

LED Light Bar

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Material
ET2-D019	180 w (60 pcs x 3 w) CREE	White	IP 67	DC 9-32 V	Spot / Flood / Combo	6500 K	≥ 2 Years	Aluminum Heatsink Housing

Contact us, as our program of straight and curved LED Light bar is huge. We carry single- and double row LED Light bars in all length.



ET2-D020

LED Light Bar

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Material
ET2-D020	45 w (15 pcs x 3 w) CREE	White	IP 67	DC 9-32 V	Spot / Flood / Combo	6500 K	≥ 2 Years	Aluminum Heatsink Housing

Contact us, as our program of straight and curved LED Light bar is huge. We carry single- and double row LED Light bars in all length.



ET2-D021

LED Light Bar

Model	LED Power	Emiting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Material
ET2-D021	240 w (48 pcs x 5 w) CREE	White	IP 67	DC 9-32 V	60° / 65° / 80° Spot / Flood / Combo	6500 K	≥ 2 Years	Aluminum Heatsink Housing


Contact us, as our program of straight and curved LED Light bar is huge. We carry single- and double row LED Light bars in all length.



ET2-D022

LED Light Bar

Model	LED Power	Emiting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Material
ET2-D022	150 w (30 pcs x 5 w)2835	White	IP 67	DC 12-24 V	Spot / Flood	6500 K	≥ 2 Years	Aluminum Heatsink Housing

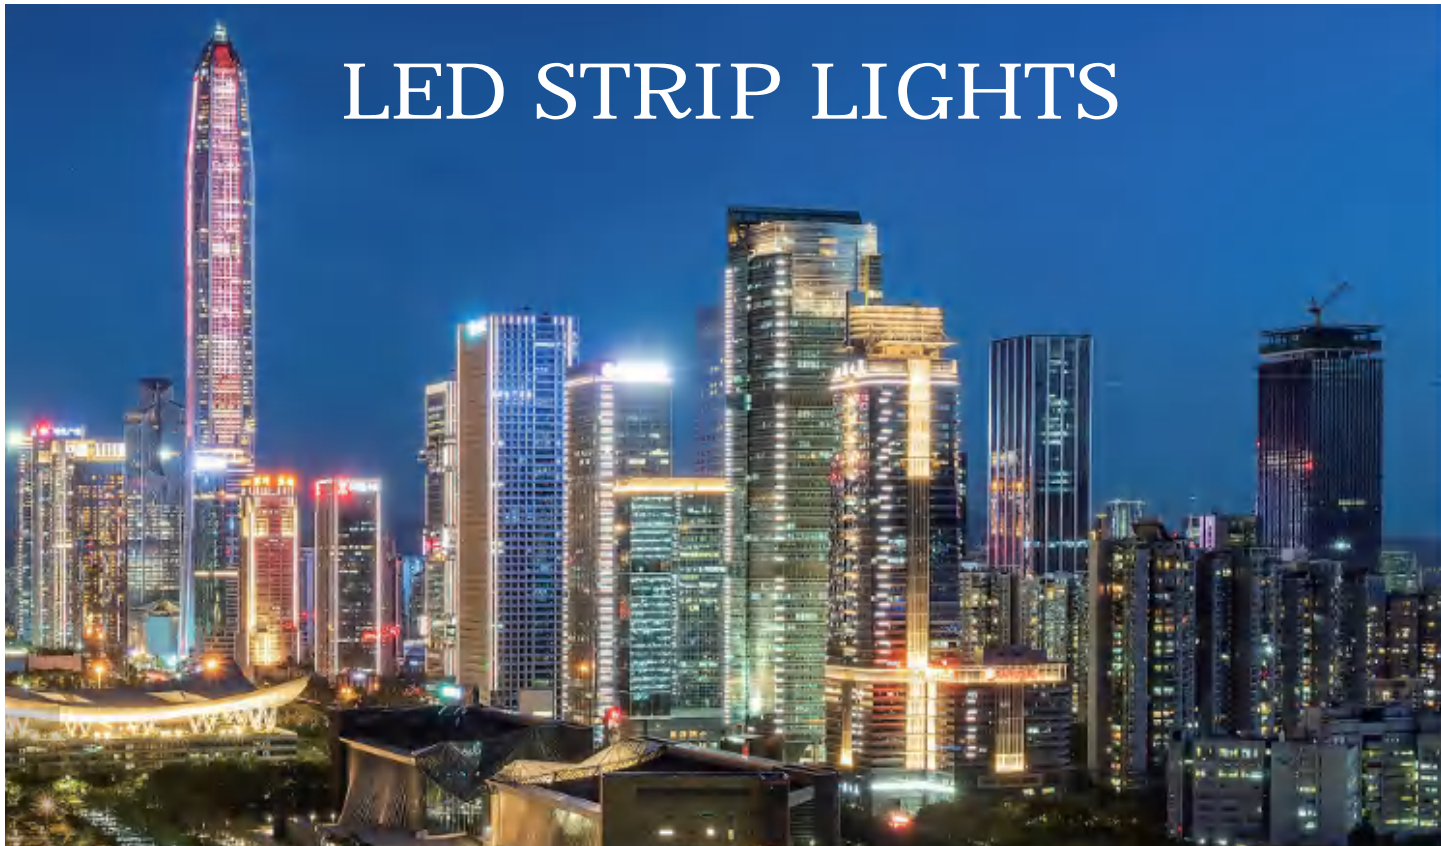

LED STRIP LIGHTS



ET7-B006

LED Strip Light

Model	Aluminum housing reversing light + brake light	Package	Box weight	Outer box size
ET7-B006		12 pcs	15 kg	22 x 27 x 158 cm



ET7-B010

LED Strip Light


Model	Maximum power	LED type	Working mode	Input Voltage	IP Rate	Color Temperature Range	Life Span
ET7-B010	28.8 w / m	COB	Red / Yellow / Blue / Green / White / Warm / White	DC 12-24 V	IP 20	3000K	≥ 2 Year



ET7-E004

LED Strip Light


Model	LED Power	IP Degree	Input Voltage	Beam Angle	Color Temperature Range	Life Span
ET7-E004	300 MM / 18 LED	IP 67	11-15 V	Red / Yellow / Blue / Green / White / Warm / White	6000K	≥ 2 Year
ET7-E005	600 MM / 36 LED	IP 67	11-15 V	Red / Yellow / Blue / Green / White / Warm / White	6000K	≥ 2 Year
ET7-E006	1000 MM / 60 LED	IP 67	11-15 V	Red / Yellow / Blue / Green / White / Warm / White	6000K	≥ 2 Year

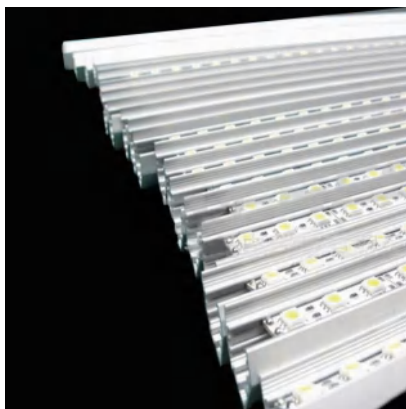

ET7-E007

LED Strip Light


Model	LED Power	IP Degree	Input Voltage	Beam Angle	Color Temperature Range	Life Span
ET7-E007	7.2W/M 30 pcs / m	IP 67	Red / Yellow / Blue / Green / White / Warm White	DC 12-24 V	6000 K	≥ 2 Year
ET7-E008	14.4W/M 60 pcs / m	IP 67	Red / Yellow / Blue / Green / White / Warm White	DC 12-24 V	6000 K	≥ 2 Year

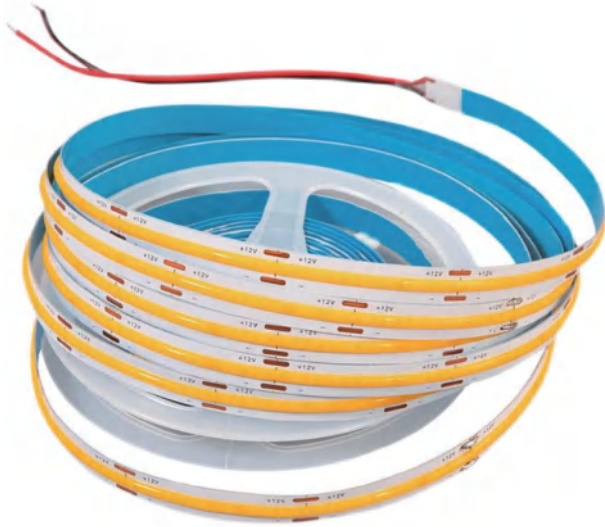

ET7-A008

LED Strip Light

Model	Maximum power	LED type	Working mode	Input Voltage	IP Rate	Color Temperature Range	Life Span	Packing
ET7-A008	10W/M 480 pcs / m (8 mm)	COB	Warm white light	12 V	IP 67	3000 K	≥ 2 Year	5 meters / roll

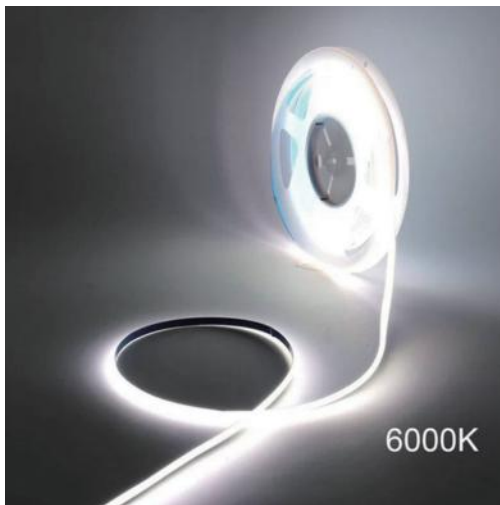

ET7-A009

LED Strip Light



Model	Maximum power	LED type	Working mode	Input Voltage	IP Rate	Color Temperature Range	Life Span	Packing
ET7-A009	10W/M 480 pcs / m (8 mm)	COB	Cool white light	DC 12 V	IP 67	6000 K	≥ 2 Year	5 meters / roll



ET7-A010

LED Strip Light

Model	Maximum power	LED type	Working mode	Input Voltage	IP Rate	Color Temperature Range	Life Span	Packing
ET7-A010	14W/M 528 pcs / m (10 mm)	COB	RGB Rainbow Light Bar	DC 12 V	IP 67	3000 K	≥ 2 Year	5 meters / roll

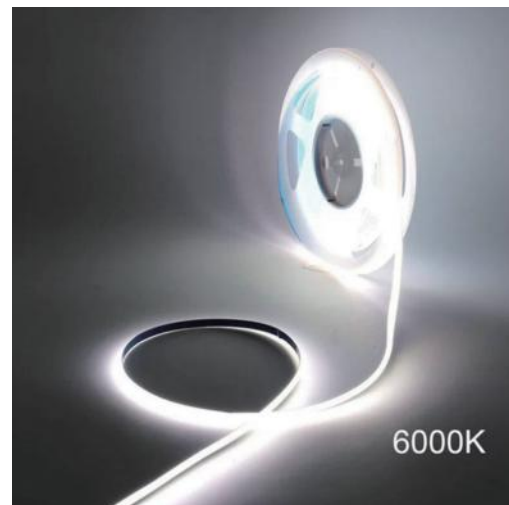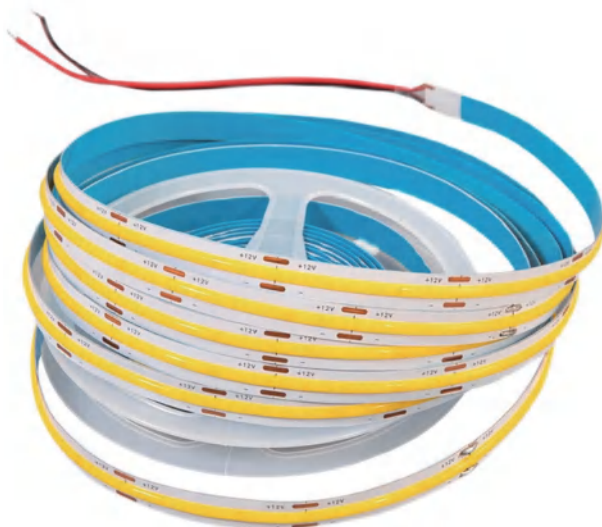

ET7-A011

LED Strip Light

Model	Maximum power	LED type	Working mode	Input Voltage	IP Rate	Color Temperature Range	Life Span	Packing
ET7-A011	14W/M 528 pcs / m (10 mm)	COB	Cool white light	DC 12 V	IP 67	6000 K	≥ 2 Year	5 meters / roll



ET7-B001

LED Strip Light

Model	Maximum power	LED type	Working mode	Input Voltage	IP Rate	Color Temperature Range	Life Span
ET7-B001	49 Inch about 1.2 m	2835	72 SMD (white light 24 SMD + red light 48 SMD)	DC 12-24 V	IP 65	6000K	Standard 4PIN



ET7-B002

LED Strip Light

Model	Maximum power	LED type	Working mode	Input Voltage	IP Rate	Color Temperature Range	Life Span
ET7-B002	60 Inch is about 1.5 m	2835	90 SMD (white light 30 SMD + red light 60S MD)	DC 12-24 V	IP 65	6000K	Standard 4PIN



ET7-B003

LED Strip Light

Model	Maximum power	LED type	Working mode	Input Voltage	IP Rate	Color Temperature Range	Life Span
ET7-B003	49 Inch is about 1.2 m	2835	72 SMD (White light 24SMD + red light 48SMD)	DC 12-24 V	IP 67	6000K	Standard 4PIN



ET7-B004

LED Strip Light

Model	Maximum power	LED type	Working mode	Input Voltage	IP Rate	Color Temperature Range	Life Span
ET7-B004	60 Inch is about 1.5 m	2835	90 SMD (white light 30 SMD + red light 60SMD)	DC 12-24 V	IP 67	6000 K	Standard 4PIN



ET7-B005

LED Strip Light



Model	Maximum power	LED type	Working mode	Input Voltage	IP Rate	Color Temperature Range	Life Span
ET7-B005	19.68 Inch x 2	2835	98 SMD Amber Yellow	DC 12.8 V	IP 65	6000K	Standard 4PIN



ET7-B007

LED Strip Light

Model	Maximum power	LED type	Working mode	Input Voltage	IP Rate	Color Temperature Range	Life Span
ET7-B007	59Inch	2835	432 SMD White light + Red light + Orange light	DC 12 V	IP 65	6000K	Standard 4PIN

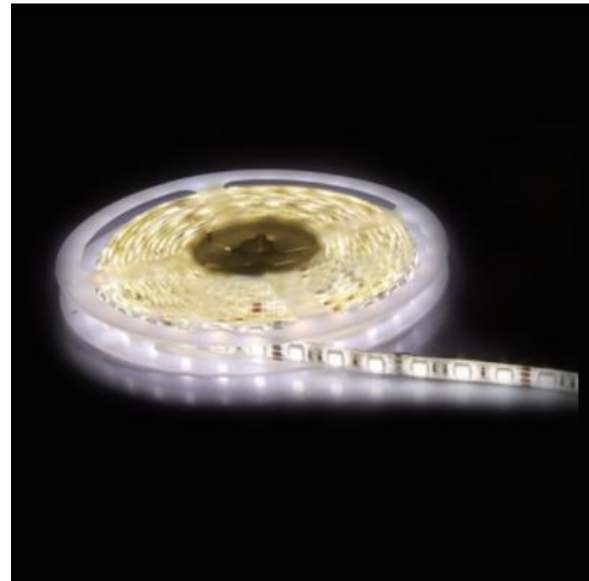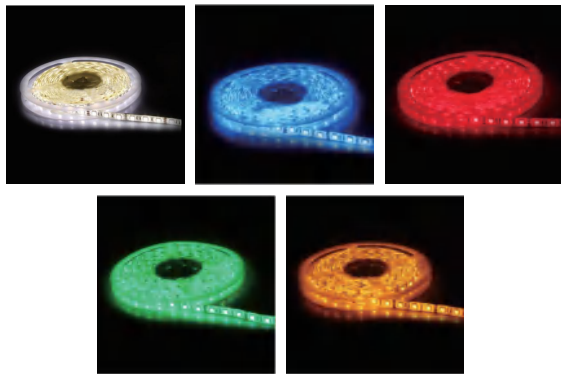

ET7-A001

LED Strip Light



Model	Maximum power	LED type	Working mode	Input Voltage	IP Rate	Color Temperature Range	Life Span
ET7-A001	14.4 W / M	5050	White	DC 12 V	IP 65	6000K	Standard 4PIN
ET7-A001R	14.4 W / M	5050	Red	DC 12 V	IP 65	6000K	Standard 4PIN
ET7-A001G	14.4 W / M	5050	Green	DC 12 V	IP 65	6000K	Standard 4PIN
ET7-A001B	14.4 W / M	5050	Blue	DC 12 V	IP 65	6000K	Standard 4PIN
ET7-A001Y	14.4 W / M	5050	Yellow	DC 12 V	IP 65	6000K	Standard 4PIN



ET7-A002R

LED Strip Light

Model	Maximum power	LED type	Working mode	Input Voltage	IP Rate	Color Temperature Range	Life Span	Packing
ET7-A002R	4.8 W / M	3528	Red	DC 12-24 V	IP 65	6000 K	≥ 2 Year	5 meters / roll

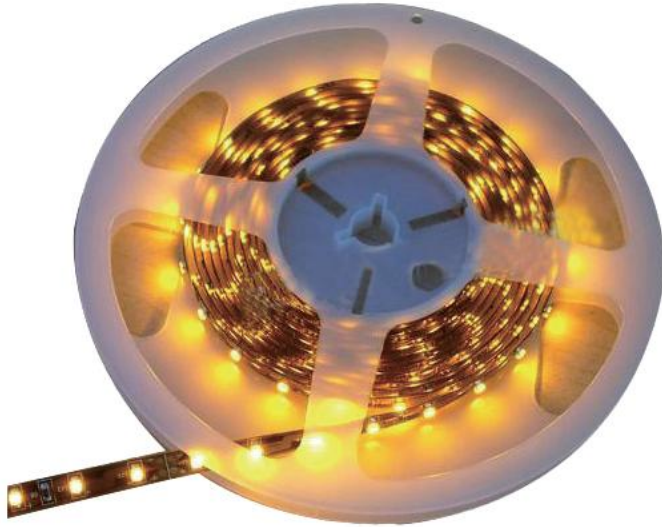


ET7-A002Y

LED Strip Light


Model	Maximum power	LED type	Working mode	Input Voltage	IP Rate	Color Temperature Range	Life Span
ET7-A002Y	4.8 w / m	3528	60 MD Amber Yellow	DC 12.8 V	IP 65	6000K	Standard 4PIN

ET7-A002

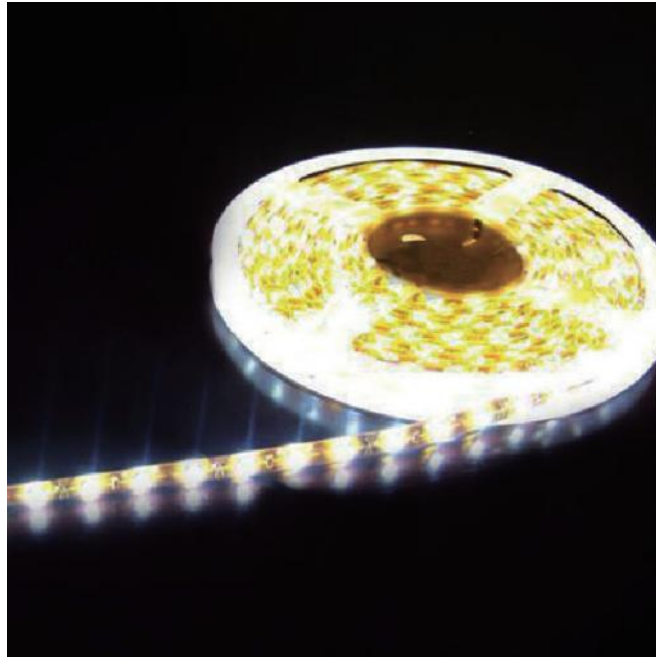

LED Strip Light

Model	Maximum power	LED type	Working mode	Input Voltage	IP Rate	Color Temperature Range	Life Span
ET7-A002	9.6 w / m	3528	120SMD Yellow	DC 12-24 V	IP 65	6000K	Standard 4PIN

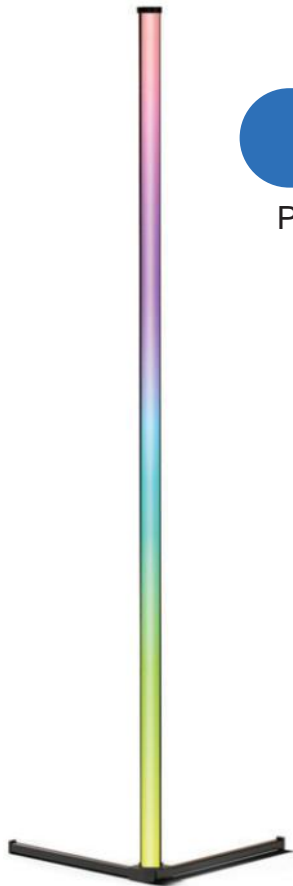


142cm
55.9inch
PACK OF 1



ET5-D012

LED Strip Light

Model	Maximum power	LED type	Working mode	Input Voltage	Music rhythm	Control	APP
ET5-D012	10W	5050	RGB magic color	USB 5V	Built-in MIC	2.4G remote control + Bluetooth APP	Bluetooth APP

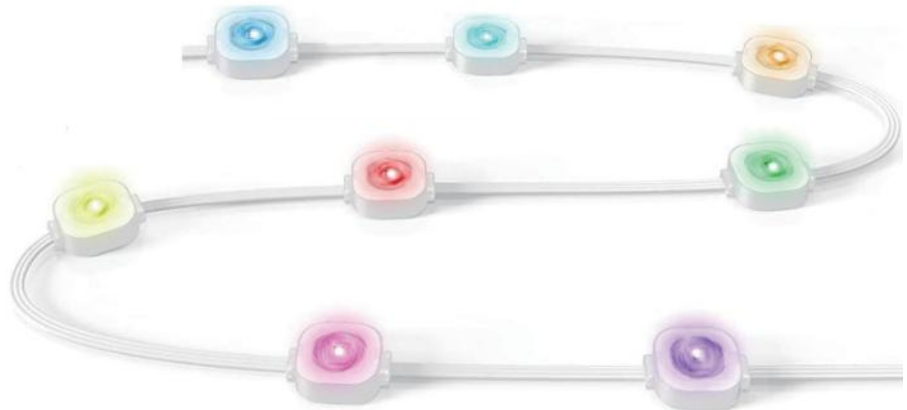


ET5-D013



LED Strip Light

Model	Maximum power	LED type	Working mode	Input Voltage	IP Rate	Music rhythm	Control	APP
ET5-D013	5W	5054	RGB magic color	DC24V	IP 67	External MIC	2.4G remote control + Bluetooth APP	Bluetooth APP

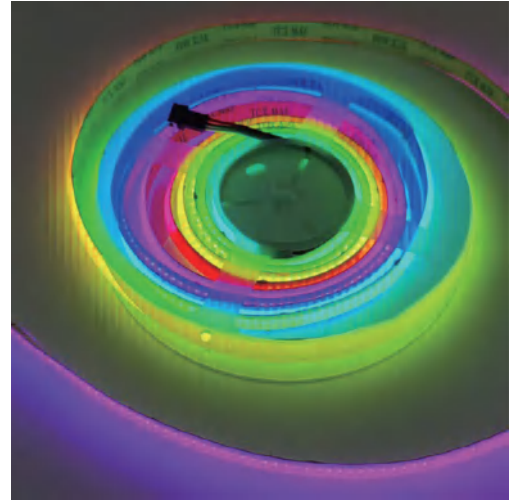

ET7-A012

LED Strip Light

Model	Maximum power	LED type	Working mode	Input Voltage	IP Rate	Color Temperature Range	Packing
ET7-A012	21W/M 720 pcs / m (10 mm)	COB	Warm white light	DC 12 V	IP 20	3000 K	5 meters / roll



ET7-A013

LED Strip Light

Model	Maximum power	LED type	Working mode	Input Voltage	IP Rate	Color Temperature Range	Packing
ET7-A013	3.2 w / m	F3	White light	DC 12 V	IP 65	6000-6500K	16 meters / roll

LED SOLAR PRODUCTS



We have far more to offer



ET8-A008



ET8-A021

LED Solar Panel

Model	LED Power	Voltage current	Temperature Range	Junction Box Type	Charging Efficiency	Life Span	Frame
ET8-A008	10 w	5 V / 2 A	-40 °C~+85 °C	USB	> 16.8 %	≥ 2 Year	Aluminum
ET8-A021	20 w	5 V / 2 A	-40 °C~+85 °C	USB	> 16.8 %	≥ 2 Year	Aluminum

We have far more to offer



ET8-A012

LED Solar Panel

Model	Maximum power	Temperature Range	Maximum power voltage / current	Life Span	Dimensions
ET8-A012	5 Watt x 2 Mono Crystalline	- 40 °C + 85 °C	5 V 2 A	≥ 2 Year	28.5 x 35.5 x 2 cm (Unfold Size)

We have far more to offer




ET8-A013

ET8-A011

LED Solar Panel

Model	Maximum power	Temperature Range	Maximum power voltage / current	Life Span	Dimensions
ET8-A013	14 Watt x 4 Mono Crystalline	- 20 °C + 50 °C	5 V 2.1 A	≥ 2 Year	76 x 23 x 2 cm (Unfold Size)
ET8-A011	7 Watt x 2 Mono Crystalline	- 20 °C + 50 °C	5 V 2.1 A	≥ 2 Year	40.5 x 23 x 2 cm (Unfold Size)

We have far more to offer

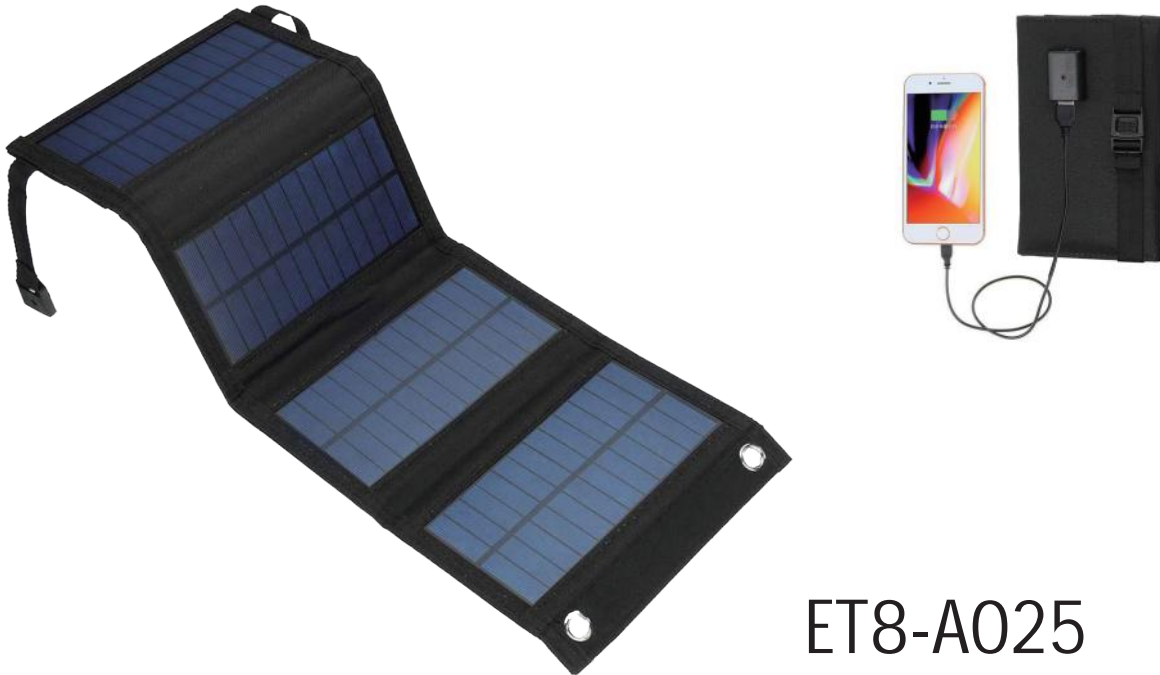

ET8-A025

LED Solar Panel

Model	Maximum power	Temperature Range	Maximum power voltage / current	Life Span	Dimensions
ET8-A025	10 Watt x 4 Mono Crystalline	-40 °C + 85 °C	5 V 2 A	≥ 2 Year	50 x 18.5 x 0.3 cm (Unfold Size)

We have far more to offer



ET8-A026

LED Solar Panel

Model	Maximum power	Temperature Range	Maximum power voltage / current	Life Span	Dimensions
ET8-A026	10 Watt x 4 Mono Crystalline	-40 °C + 85 °C	5 V 2 A	≥ 2 Year	50 x 18.5 x 0.3 cm (Unfold Size)

LED SOLAR PANEL POWERED PRODUCTS



ET1-D016S



ET1-D029




ET1-D027

LED SOLAR PANEL POWERED PRODUCTS

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-D016S	20 w (2 pcs x 10 w x 2)	COB LED White	IP 65	DC 5 V	Flood	6000-6500 K	≥ 2 Years	2000±100 LM	Aluminum Heatsink Housing
ET1-D029	36 w (6 pcs x 3 w x 2)	CREE LED White	IP 65	DC 5 V	Spot / Flood	6000-6500 K	≥ 2 Years	1200 ± 50 LM	Aluminum Heatsink Housing
ET1-D027	36 w (6 pcs x 3 w x 2)	CREE LED White	IP 65	DC 5 V	Spot / Flood	6000-6500 K	≥ 2 Years	1200 ± 50 LM	Aluminum Heatsink Housing



ET8-A031

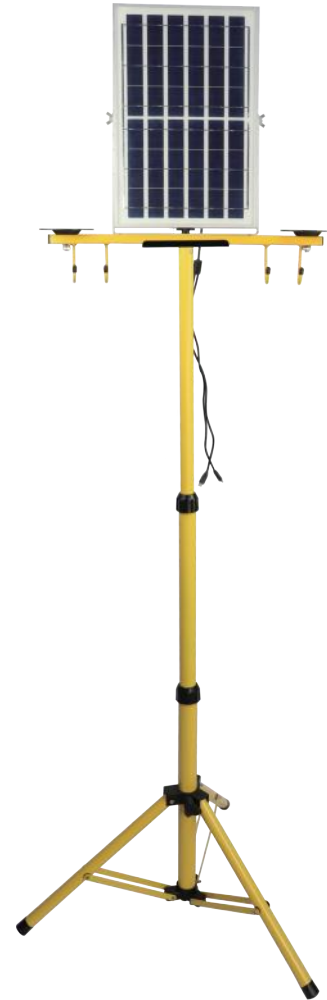

ET8-A032

LED SOLAR PANEL POWERED PRODUCTS

Model	Maximum power	Temperature Range	IP Rate	Product height	Diameter of the Tube	Diameter of the feet
ET8-A031	20 w 5V / 2A	-40°C ~ +85°C	IP 65	Height: tallest height -200 cm Shortest height - 73 cm	38 cm / 25 cm (from bottom to top)	2.5 cm
ET8-A032	10 w 5V / 2A	-40°C ~ +85°C	IP 65	Height: tallest height -200 cm Shortest height - 73 cm	38 cm / 25 cm (from bottom to top)	2.5 cm



ET8-A022

Solar Panel Light


Model	LED Power	Emitting color	IP Degree / IP Rate	Input Voltage	Temperature Range	Color Temperature	Life Span	Material
ET8-A022	18 w (6 pcs x 3 w) CREE	White	IP 67 / IP 65	DC 5 V	-40°C ~ +85°C	6000~6500 K	≥ 2 Years	Aluminum Heatsink Housing



ET8-A023

Solar Panel Light

Model	LED Power	Emitting color	IP Degree / IP Rate	Input Voltage	Temperature Range	Color Temperature	Life Span	Material
ET8-A023	9 w (3 pcs x 3 w) CREE	White	IP 67 / IP 65	DC 5 V	-40°C ~ +85°C	6000~6500 K	≥ 2 Years	Aluminum Heatsink Housing

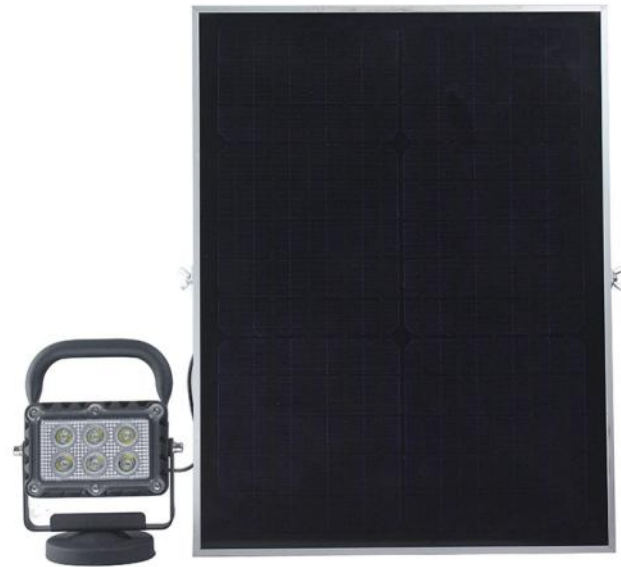


ET8-A024

Solar Panel Light

Model	LED Power	Emitting color	IP Degree / IP Rate	Input Voltage	Temperature Range	Color Temperature	Life Span	Material
ET8-A024	18 w (6 pcs x 3 w) CREE	White	IP 67 / IP 65	DC 5 V	-40°C ~ +85°C	6000-6500 K	≥ 2 Years	Aluminum Heatsink Housing




ET1-D025

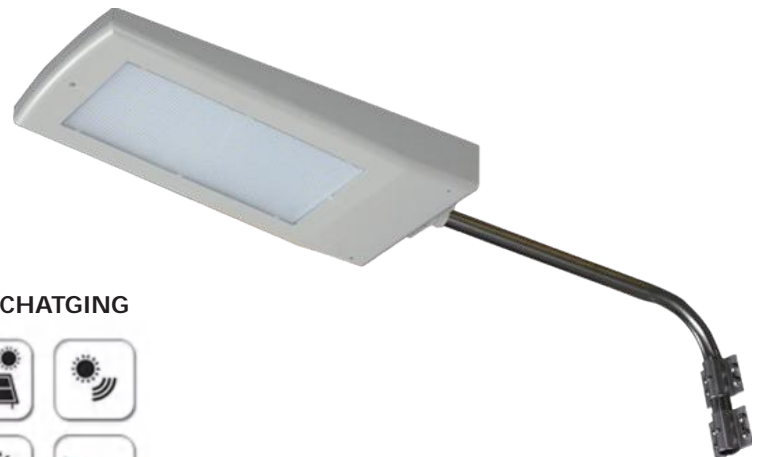


ET10-A001

SOLAR/USB CHATGING



Solar Panel Light

Model	LED Power	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET10-A001	10 w (108 pcs) LEDs	IP 65	DC 4.2 V	Spot	5800-6300 K	≥ 2 Years	2100 LM	Aluminum Heatsink Housing
ET1-D025	10 w (108 pcs) LEDs	IP 65	DC 4.2 V	Spot	5800-6300 K	≥ 2 Years	2100 LM	Aluminum Heatsink Housing

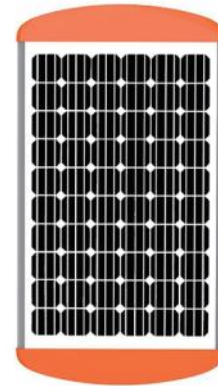

ET10-A012

Solar Panel Light


Model	LED Power	Emitting color	IP Rate	Input Voltage	Temperature Range	Color Temperature	Life Span	Material
ET8-A022	35 w SMD5050	White	IP 66	DC 12-24 V	-10°C ~ 50°C	2700-6500 K	≥ 3 Years	Aluminum Heatsink Housing



ET10-A013

Solar Panel Light

Model	LED Power	Emitting color	IP Rate	Input Voltage	Temperature Range	Color Temperature	Life Span	Material
ET8-A023	10 w Bridgelux 3030	White	IP 66	DC 3.2 V	-10°C ~ 50°C	2700-6500 K	≥ 3 Years	Aluminum Heatsink Housing

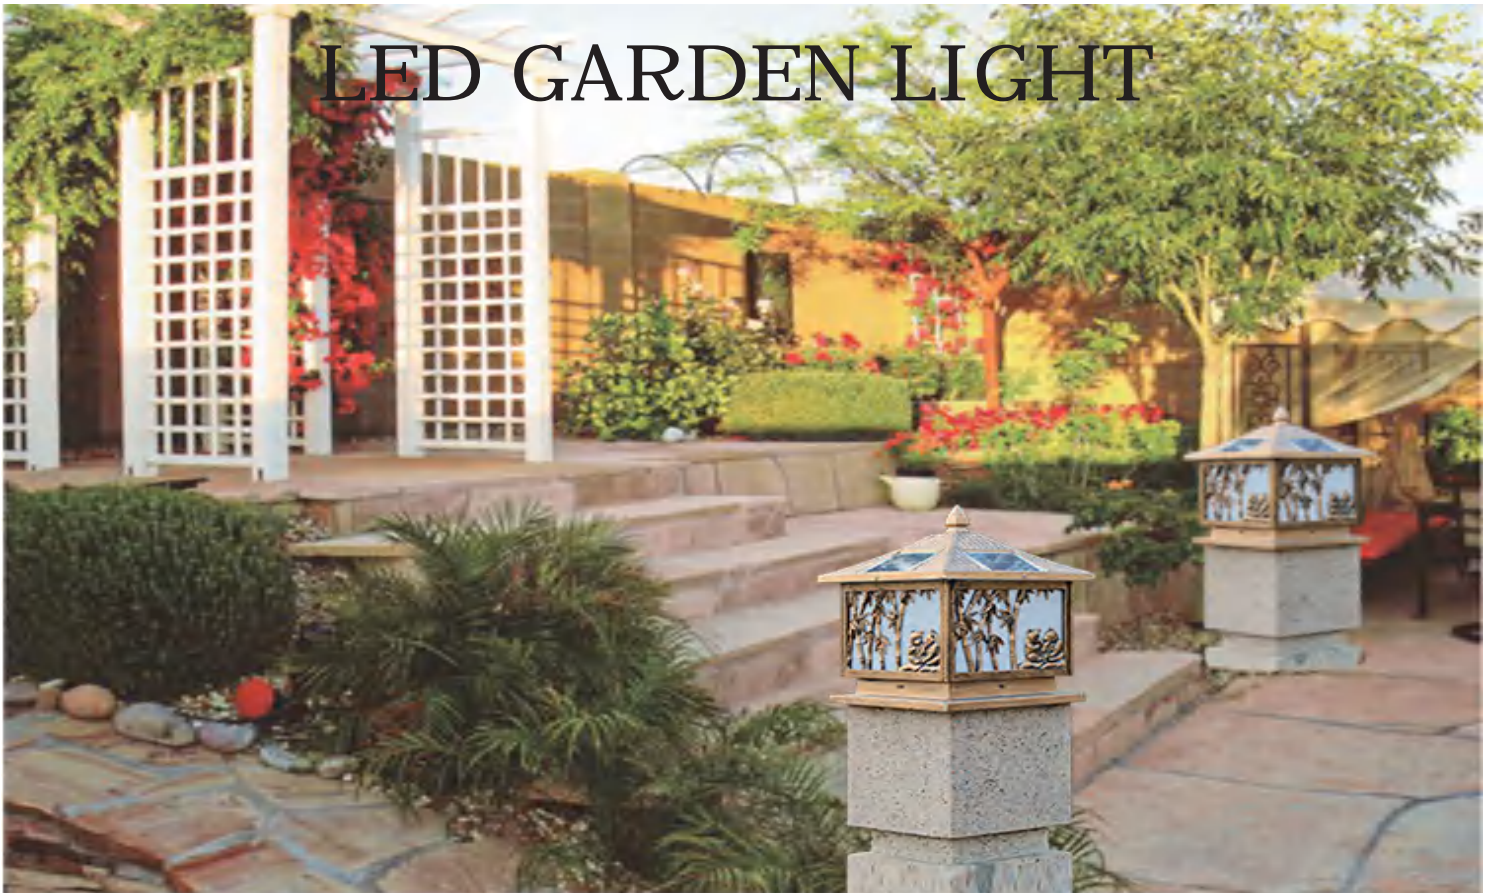


LED GARDEN LIGHT



ET10-B059

Material	Aluminum
LED power	3 w
Protection grade	IP 65
Input voltage	3,6 V
Battery	1800 mAh
Solar panel	2.8 w
Dimension	25 x 25 x 33 cm
Measurement / carton	61 x 31 x 38 cm
Qty / carton	2 pcs

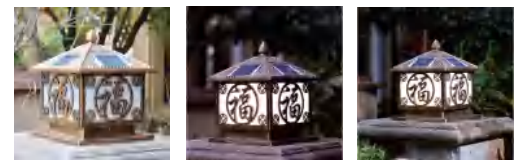


ET10-B060

Material	Die-cast aluminum	Transparent glass lampshade
LED power	6 w	
Protection grade	IP 65	
Input voltage	220 V	
Battery	7200 mAh	
Solar panel	6 w	
Dimension	50 x 50 x 45 cm	
Measurement / carton	51.5 x 51.5 x 52 cm	
Qty / carton	1 pcs	



LED Tripod Work Lights

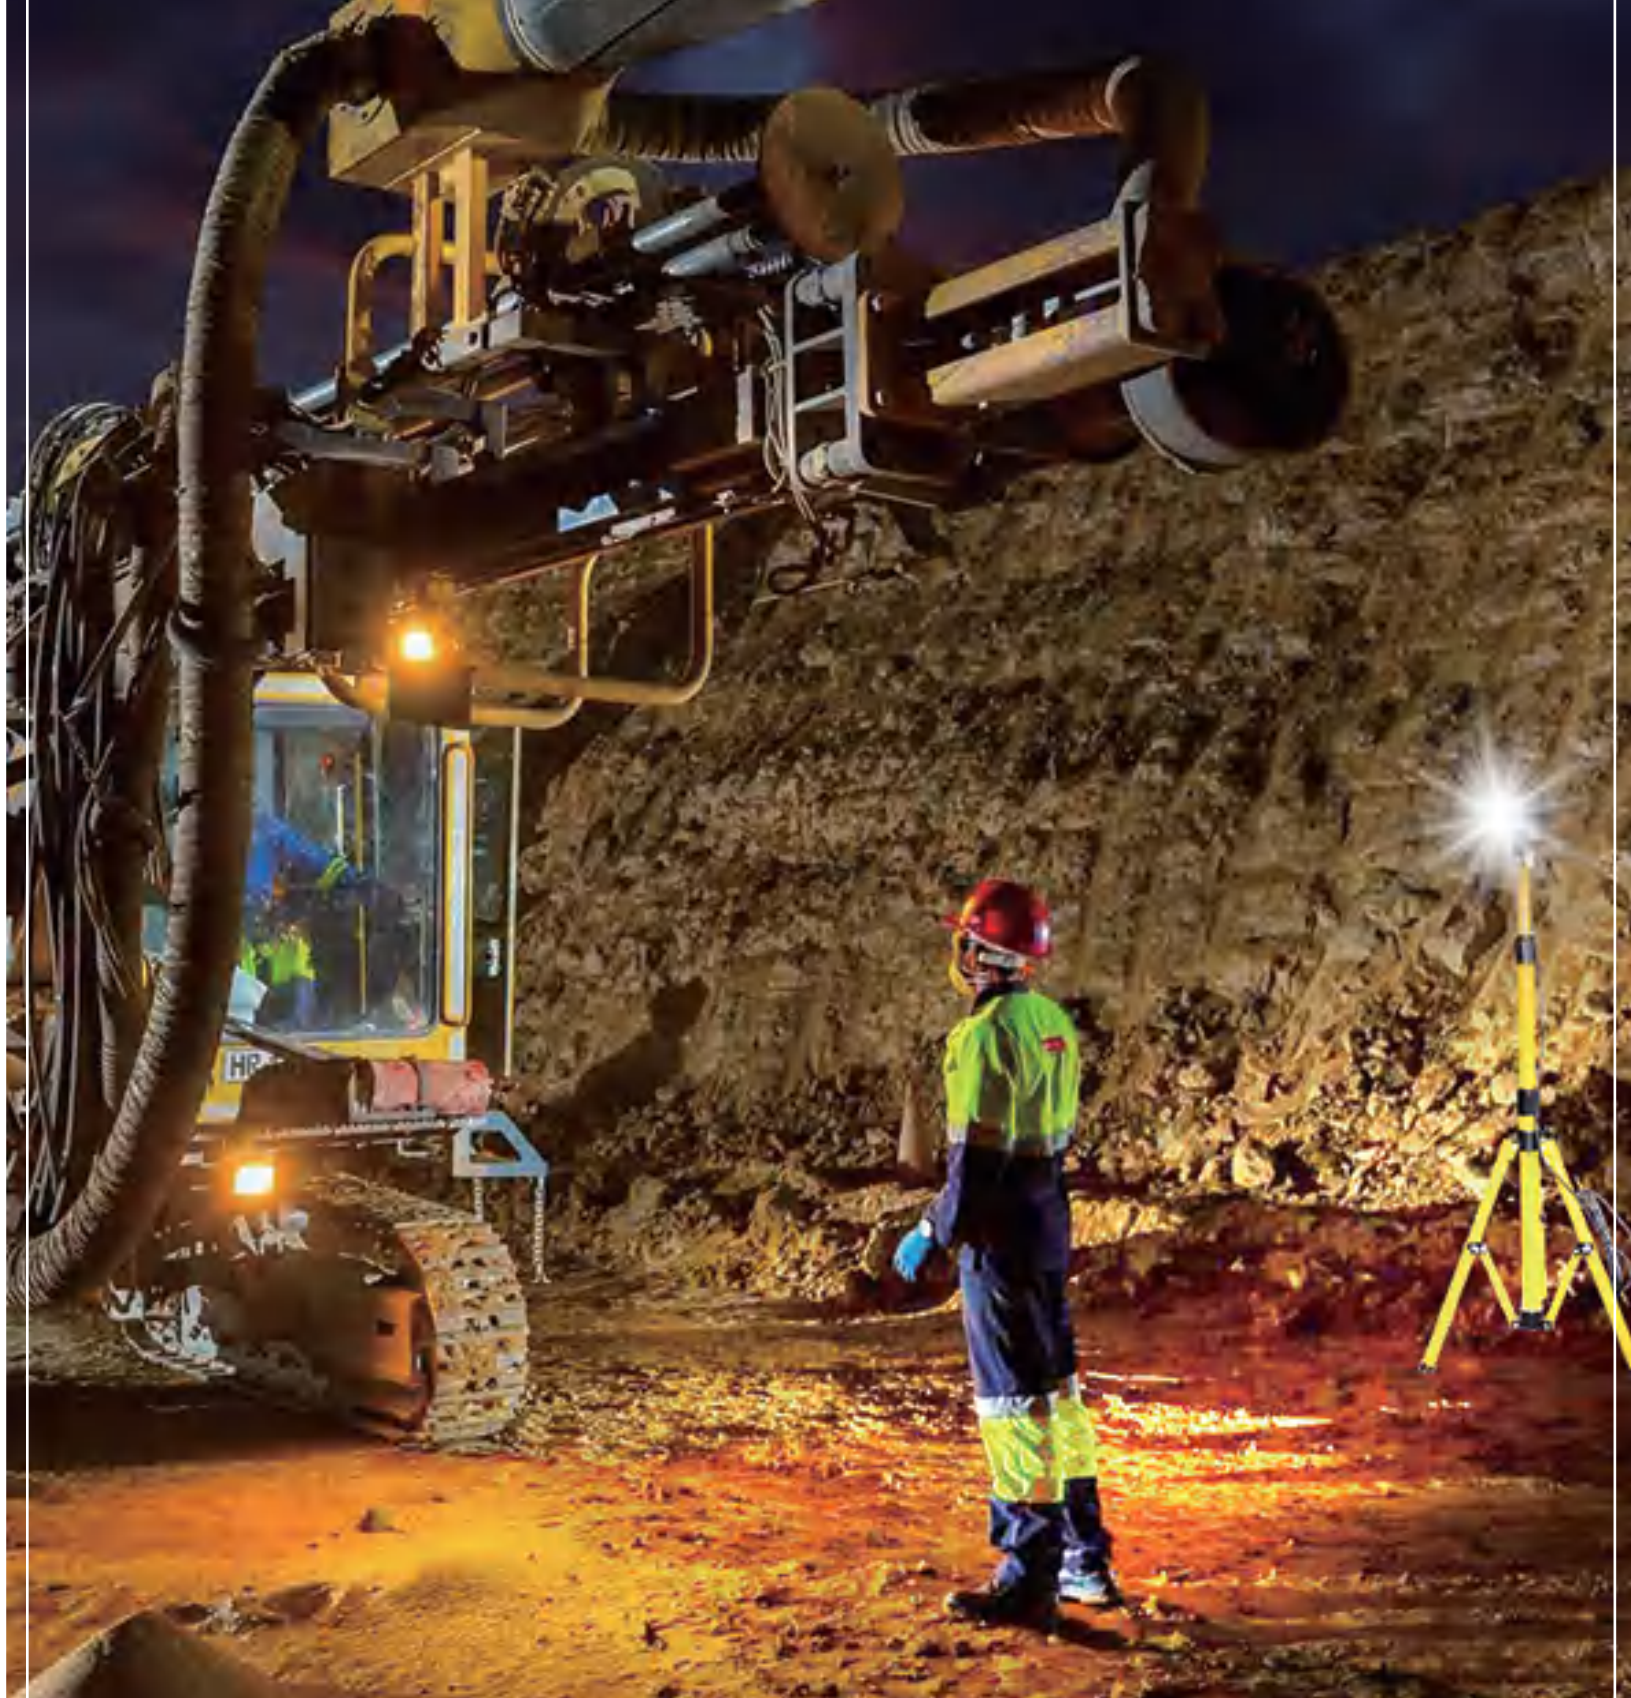

TRIPOD AC Work Lights



ET1-D001AC



ET1-D002AC



ET1-D003AC

TRIPOD AC Work Lights

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-D001AC	27 w (9 pcs x 3 w)	White	IP 67	AC 85-265 V	Flood	6000-6500 K	≥ 2 Years	1620 LM	Aluminum Heatsink Housing
ET1-D002AC	54 w (9 pcs x 3 w x 2)	White	IP 67	AC100-240 V	Flood	6000-6500 K	≥ 2 Years	3240 LM	Aluminum Heatsink Housing
ET1-D003AC	18 w (6 pcs x 3 w)	White	IP 67	AC 85-265 V	Flood	6000-6500 K	≥ 2 Years	1200 LM	Aluminum Heatsink Housing



ET1-D004AC



ET1-D005AC



ET1-D006AC

TRIPOD AC Work Lights

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-D004AC	36 w (6 pcs x 3 w x 2)	White	IP 67	AC 85 - 265 V	Flood	6000-6500 K	≥ 2 Years	2400 LM	Aluminum Heatsink Housing
ET1-D005AC	27 w (9 pcs x 3 w)	White	IP 67	AC 85 - 265 V	Flood	6000-6500 K	≥ 2 Years	1200 LM	Aluminum Heatsink Housing
ET1-D006AC	54 w (9 pcs x 3 w x 2)	White	IP 67	AC 85 - 265 V	Flood	6000-6500 K	≥ 2 Years	3240 LM	Aluminum Heatsink Housing



ET1-D007AC



ET1-D019AC



ET1-D020AC

TRIPOD AC Work Lights

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-D007AC	20 w (2 pcs x 10 w x 2)	White	IP 67	AC 85 - 265 V	Flood	2700-7000 K	≥ 2 Years	1600 LM	Aluminum Heatsink Housing
ET1-D019AC	100 w (2 x 2 pcs x 50 w)	White	IP 67	AC 90 - 260 V	Flood	2700-6500 K	≥ 2 Years	4000 LM	Aluminum Heatsink Housing
ET1-D020AC	60 w (2 x 2 pcs x 30 w)	White	IP 67	AC 90 - 260 V	Flood	2000-6500 K	≥ 2 Years	3000 LM	Aluminum Heatsink Housing



ET1-D001DC



ET1-D002DC



ET1-D003DC

TRIPOD DC Work Lights

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-D001DC	27 w (9 pcs x 3 w)	White	IP 67	DC 12-36 V	Flood	6000-6500 K	≥ 2 Years	1620 LM	Aluminum Heatsink Housing
ET1-D002DC	54 w (9 pcs x 3 w x 2)	White	IP 67	DC 12-36 V	Flood	6000-6500 K	≥ 2 Years	3240 LM	Aluminum Heatsink Housing
ET1-D003DC	18 w (6 pcs x 3 w)	White	IP 67	DC 12-36 V	Flood	6000-6500 K	≥ 2 Years	1200 LM	Aluminum Heatsink Housing

TRIPOD

DC Work Lights



ET1-D004DC



ET1-D005DC



ET1-D006DC

TRIPOD DC Work Lights

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-D004DC	36 w (6 pcs x 3 w x 2)	White	IP 67	DC 12 - 36 V	Flood	6000-6500 K	≥ 2 Years	2400 LM	Aluminum Heatsink Housing
ET1-D005DC	27 w (9 pcs x 3 w)	White	IP 67	DC 12 - 36 V	Flood	6000-6500 K	≥ 2 Years	1200 LM	Aluminum Heatsink Housing
ET1-D006DC	54 w (9 pcs x 3 w x 2)	White	IP 67	DC 12 - 36 V	Flood	6000-6500 K	≥ 2 Years	3240 LM	Aluminum Heatsink Housing

TRIPOD

Rechargeable Work Lights



ET1-D011DC



ET1-D012DC



ET1-D013DC

TRIPOD Rechargeable Work Lights

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-D011DC	8 w (16 pcs x 0.5 w)	White	IP 65	DC 5 V	Flood	6000-6500 K	≥ 2 Years	500 ± 50 LM	Aluminum Heatsink Housing
ET1-D012DC	16 w (16 pcs x 0.5 w x 2)	White	IP 65	DC 5 V	Flood	6000-6500 K	≥ 2 Years	1000 ± 50 LM	Aluminum Heatsink Housing
ET1-D013DC	9 w (3 pcs x 3 w)	White	IP 65	DC 5 V	Flood	6000-6500 K	≥ 2 Years	540 ± 50 LM	Aluminum Heatsink Housing



ET1-D014DC




ET1-D015DC



ET1-D016DC

TRIPOD Rechargeable Work Lights

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-D014DC	18 w (3 pcs x 3 w x 2)	White	IP 65	DC 5 V	Flood	6000-6500 K	≥ 2 Years	1080 ± 50 LM	Aluminum Heatsink Housing
ET1-D015DC	10 w (1 pcs x 10 w)	White	IP 65	DC 5 V	Flood	6000-6500 K	≥ 2 Years	1080 ± 50 LM	Aluminum Heatsink Housing
ET1-D016DC	20 w (1 pcs x 10 w x 2)	White	IP 65	DC 5 V	Flood	6000-6500 K	≥ 2 Years	2000 ± 100 LM	Aluminum Heatsink Housing

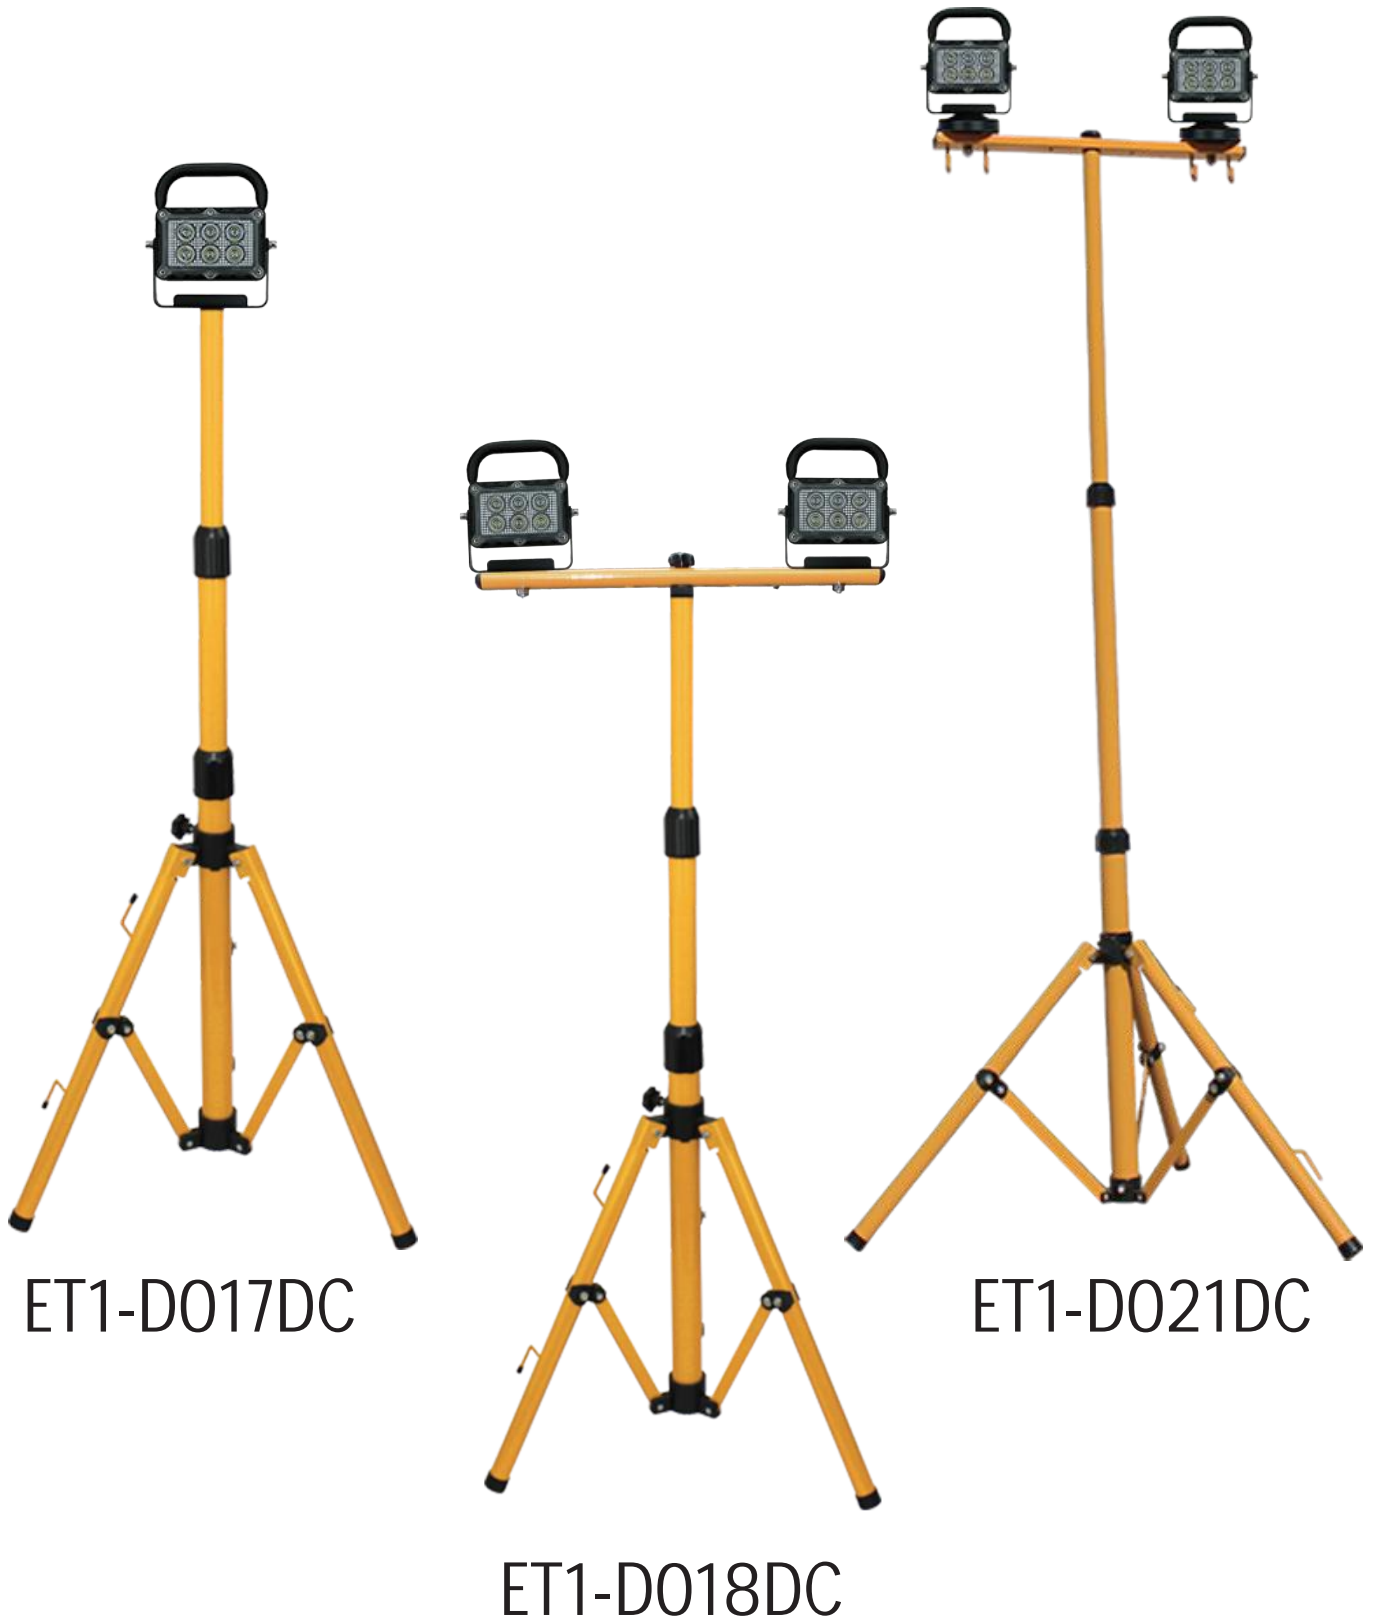

TRIPOD Rechargeable Work Lights

Model	LED Power	Emitting color	IP Degree	Input Voltage	Beam Angle	Color Temperature	Life Span	Lumens	Material
ET1-D017DC	18 w (6 pcs x 3 w)	White	IP 65	DC 5 V	Flood	6000-6500 K	≥ 2 Years	1200 ± 50 LM	Aluminum Heatsink Housing
ET1-D018DC	36 w (6 pcs x 3 w x 2)	White	IP 65	DC 5 V	Flood	6000-6500 K	≥ 2 Years	2400 ± 50 LM	Aluminum Heatsink Housing
ET1-D021	36 w (6 pcs x 3w x 2)	White	IP 65	DC 5 V	Flood	6000-6500 K	≥ 2 Years	2400 ± 50 LM	Aluminum Heatsink Housing

TRIPOD

Single



ET8-A005



ET8-A010

TRIPOD Single

Model	Material	Tri-pod color	Product height	Diameter of the Tube	Diameter of the feet
ET8-A005	Metal	Yellow	Height: tallest height -160 cm Shortest height - 62 cm	38 cm / 25 cm (from bottom to top)	2.5 cm
ET8-A010	Metal	Yellow	Height: tallest height -160 cm Shortest height - 62 cm	38 cm / 25 cm (from bottom to top)	2.5 cm



ET8-A017



ET8-A029

TRIPOD Single

Model	Material	Tri-pod color	Product height	Diameter of the Tube	Diameter of the feet
ET8-A017	Metal	Yellow	Height: tallest height - 160 cm Shortest height - 62 cm	38 cm / 25 cm (from bottom to top)	2.5 cm
ET8-A029	Metal	Black	Height: tallest height - 270 cm Shortest height - 120 cm	42 cm / 38 cm (from bottom to top)	3.5 cm

BICYCLE - NEW LED FRONT LIGHTS





ET3-E001

Material	ABS
Color	Black
Dimension	10.7 x 3.3 cm
Packaging dimension	20 x 10 x 4.5 cm
Certified product	CE Approved
Net weight	190 g
Gross weight	225 g
Lumens	400 lm
Battery capacity	4000 mAh
Function	1. USB charging, charge as a power bank 2. 360 degree optional bracket, efficient heat dissipation
Qty / carton	60 pcs
Measurement / carton	51.5 x 44 x 26.5 cm
Weight / carton	14.50kg



ET3-E002

Material	ABS + Aluminum alloy
Color	Black / Silver
Lamp beads	2 x T6 LED
Dimension	10.8 x 4.9 cm
Packaging dimension	16 x 12.5 x 3.8 cm
Certified product	CE Approved
Net weight	276 g
Gross weight	315 g
Lumens	500 lm
Battery capacity	4000 mAh
Function	1. press the first to high bright / press the second to low light / press the third to sos / press the forth to work light / long press to turn off 2. USB charging, can be used as a power bank
Qty / carton	40 pcs
Measurement / carton	43.5 x 34 x 41 cm
Weight / carton	13.60 kg



ET3-E003

Material	ABS + Aluminum alloy
Color	Black / Dark - grey / Red / Silver
Certified product	CE Approved
Dimension	10.8 x 4.9 cm
Packaging dimension	16 x 12.5 x 3.8 cm
Net weight	120 g
Gross weight	150 g
Lumens	800 lm
Battery capacity	2500 mAh
Function	1. Four lighting modes: strong light mode for 3 hours, low light mode for 5 hours, alternately flashing yellow for 3 hours, warning light for 1 hour 2. USB direct charge, convenient and fast 3. Multi - mode charging 4. Display the battery status of the lights 5. Long range, not dazzling
Qty / carton	40 pcs
Measurement / carton	43.5 x 34 x 41 cm
Weight / carton	13.60 kg



ET3-E004


Material	ABS
Color	Black / White
Dimension	6.6 x 3 x 2.1 cm
Packaging dimension	16.5 x 10.3 x 4.5 cm
Net weight	43 g
Gross weight	63 g
Lumens	300 lm
Battery capacity	800 mAh
Function	100 % (3 hours) / 50 % (5 hours) / Flashing (12 hours)
Qty / carton	120 pcs
Measurement / carton	40 x 36.5 x 41 cm
Weight / carton	9.00 kg



ET3-E005




Material	ABS
Color	Red light / White light / Red - blue dimming / Steplless dimming / Red - white dimming / Bubble bag red light / Bubble bag white light
Dimension	5.3 x 4.5 x 3.5 cm
Packaging dimension	10.8 x 5.4 x 7.5 cm
Net weight	57 g
Gross weight	83 g
Lumens	50 lm
Battery capacity	650 mAh
Function	4 - speed mode, charging time 2 - 3 hours, battery life 2 - 8 hours, high - quality waterproof silicone switch
Qty / carton	100 pcs
Measurement / carton	48 x 31 x 57 cm
Weight/carton	10.00 kg

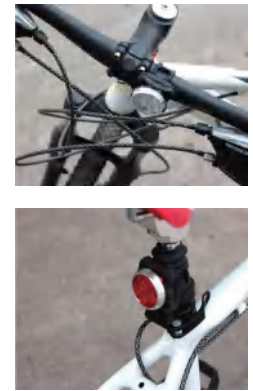

ET3-E006



Material	ABS
Color	Black
Dimension	7 x 4 x 2 cm
Packaging dimension	9.2 x 7.2 x 5.2 cm
Certified product	CE Approved
Net weight	60 g
Gross weight	114 g
Lumens	400 lm
Battery capacity	1200 mAh
Function	1. ①. 4 operating modes: smart mode, strong light, low light, flashing, screen flashing ②. Aurora mode can be used continuously for 2 hours, and power saving mode for 6 hours. 2. 180 degree ultra - wide reflective ring technology, you can see from the corner clear
Qty / carton	120 pcs
Measurement / carton	52.5 x 30 x 29 cm
Weight / carton	14.60 kg

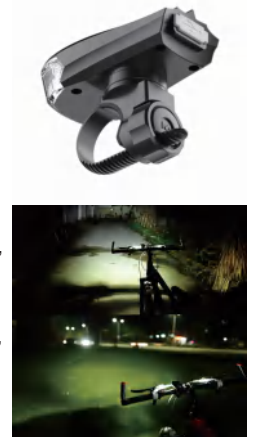

ET3-E007



Material	ABS
Color	Black
Dimension	7.5 x 4.5 x 4.1 cm
Packaging dimension	9.5 x 8 x 5.3 cm
Certified product	CE Approved
Net weight	88 g
Gross weight	116 g
Battery capacity	1200 mAh
Function	1. Four operating modes: smart mode, day running light, strong light + day running light, power saving + day running light, screen flashing 2. 180 degree ultra - wide reflective ring technology, all corners can be seen clearly
Qty / carton	125 pcs
Measurement / carton	49.5 x 42 x 28.5 cm
Weight / carton	15.50 kg




ET3-E008



Material	ABS + Aluminum alloy
Color	Black
Dimension	6 x 8 x 8 cm
Packaging dimension	9 x 8.2 x 6 cm
Net weight	179 g
Gross weight	211 g
Battery capacity	1200 mAh
Function	1. High light / Low light / Burst flash / Red and blue slow flash 2. USB fast charge, hide the USB charging port 3. Convenient switch, high light LED light 4. Red light on the left, blue light on the right, LED light in the middle
Qty / carton	75 pcs
Measurement / carton	43 x 32 x 28.5 cm
Weight / carton	16.80 kg



ET3-E009

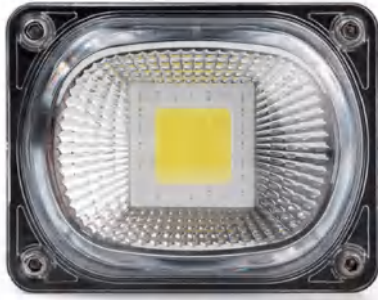


Material	ABS + Aluminum alloy
Color	Gold
Dimension	8 x 6 x 5 cm
Packaging dimension	6.2 x 5 x 14.3 cm
Net weight	168 g
Gross weight	184 g
Lumens	500 lm
Battery capacity	1200 mAh
Function	1. Fast charging, low power consumption and long life 2. Three gears adjustable: Strong light / Low light / Flash / Can be adjusted according to different places
Qty / carton	120 pcs
Measurement / carton	52.5 x 32 x 35.5 cm
Weight / carton	23.10 kg



ET3-E010



Material	ABS
Color	Black
Dimension	10 x 8.5 x 3.5 cm
Packaging dimension	14.3 x 6 x 10.5 cm
Net weight	118 g
Gross weight	148 g
Lumens	200 lm
Battery capacity	1200 mAh
Function	1. High light / Medium light / Low light / Flash 2. Suitable for most bicycle handles (18 - 38 mm)
Qty / carton	120 pcs
Measurement / carton	59 x 34 x 36 cm
Weight / carton	18.90 kg



ET3-E011




Material	ABS
Color	Black / Silver / Blue
Dimension	9 x 4.5 x 4.2 cm
Packaging dimension	17.3 x 10.4 x 4.5 cm
Net weight	60 g
Gross weight	88 g
Lumens	120 lm
Battery capacity	1200 mAh
Function	1. Independent dual lamp design 2. Small and exquisite, saving space 3. 15 modes to choose from, free combination of high beam + floodlight 4. Range 150 meters
Qty / carton	240 pcs
Measurement / carton	67 x 55 x 44 cm
Weight / carton	21.70 kg



ET3-E013



Material	ABS
Color	Black / Blue / Red
Dimension	7.5 x 8 x 6 cm
Packaging dimension	9.2 x 9.2 x 9 cm
Net weight	126 g
Gross weight	156 g
Lumens	1200 lm
Battery capacity	1800 mAh
Function	1. Strong light + red warning light 2. IP X6 waterproof 3. 360 degree rotation
Qty / carton	120 pcs
Measurement / carton	46 x 39 x 58.5 cm
Weight / carton	20.00 kg





ET3-E014

Material ABS
 Color Red / Blue / Black
 Dimension 8.7 x 4.5 x 6.3 cm
 Packaging dimension 9.8 x 5.1 x 9.8 cm
 Net weight 89 g
 Gross weight 115 g
 Lumens 250 lm
 Battery capacity 1200 mAh
 Function

1. Anti - theft high - decibel 130 decibel car light horn, double sound and light buttons, free control of 5 sound effects
2. IP X5 waterproof
3. Three modes: Strong light mode / Low light mode / Burst flash

Qty / carton 80 pcs
 Measurement / carton 46 x 32 x 29.5 cm
 Weight / carton 10.00 kg



ET3-E015

Material ABS
 Color Black
 Dimension 10 x 4.5 x 3 cm
 Packaging dimension 10.5 x 7 x 5.5 cm
 Net weight 65 g
 Gross weight 95 g
 Lumens 250 lm
 Battery capacity 3 pcs AAA batteries
 Function

1. With alarm function, intelligent anti-theft
2. 120 high decibels, five sound effects
3. Three modes: Strong light for 2.5 hours / Low light for 5 hours / Burst flash for 3.5 hours

Qty / carton 120 pcs
 Measurement / carton 46.5 x 45.5 x 29.5 cm
 Weight / carton 12.40 kg




ET3-E016

Material ABS
 Color Black
 Dimension 10.5 x 6 x 4 cm
 Packaging dimension 10.6 x 7 x 5.5 cm
 Net weight 127 g
 Gross weight 160 g
 Lumens 350 lm
 Battery capacity 2000 mAh
 Function

1. Light mode: strong light, 6 hours of battery life, low light, 3 hours of battery life, flashing
2. 120 dB
3. Waterproof design, work normally regardless of rain or fog

Qty / carton 120 pcs
 Measurement / carton 46.5 x 45.5 x 29.5 cm
 Weight / carton 19.80 kg

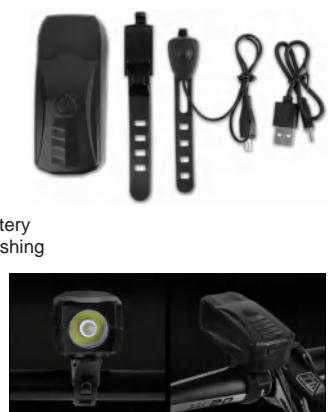

ET3-E017

Material ABS
 Color Black / Gold
 Dimension 7.5 x 6.5 x 4.3 cm
 Packaging dimension 9 x 8.6 x 9 cm
 Net weight 182 g
 Gross weight 215 g
 Lumens 350 lm
 Battery capacity 1800 mAh
 Function

1. USB charging car headlight
2. Three gears control light: Touch to switch gears / Strong light / Low light / Burst flashing
3. Life - level waterproof, rainproof, damp, please do not soak in rain for a long time
4. Free zoom, turn left and right to adjust the light

Qty / carton 80 pcs
 Measurement / carton 55 x 36 x 46 cm
 Weight / carton 17.60 kg





ET3-E018

Material ABS
 Color Black / Orange
 Dimension 10 x 5.5 x 4 cm
 Packaging dimension 17 x 11.2 x 5.2 cm
 Net weight 75 g
 Gross weight 95 g
 Battery capacity 3 pcs AAA batteries
 Function
 1. Three modes: Always on / slow flashing / Fast flashing
 2. Four modes of sound
 3. There is a switch for the horn and the light to save power

Qty / carton 120 pcs
 Measurement / carton 54.5 x 33.5 x 46 cm
 Weight / carton 12.40 kg



ET3-E019

Material ABS
 Color Silver / Gold / Red / Blue
 Dimension 9 x 5 x 3 cm
 Packaging dimension 12 x 11 x 4.3 cm
 Net weight 101 g
 Gross weight 134 g
 Lumens 300 lm
 Battery capacity 1200 mAh
 Function
 1. Built - in anti - theft alarm function, newly upgraded alarm horn light, lightly press to switch the light, turn off the light and long press for three seconds to open the anti - theft function
 2. Three kinds of brightness are adjustable, the light effect is different time you press it, long press for three seconds can make an alarm sound
 3. Five kinds of sound effects are free to control

Qty / carton 100 pcs
 Measurement / carton 58 x 25 x 23 cm
 Weight / carton 14.40 kg



ET3-E020

Material ABS
 Color Red / Black / Blue / Orange / Green
 Product Horn with light / Horn without light
 Dimension 9 x 5 x 3 cm
 Packaging dimension 12 x 11 x 4.3 cm
 Net weight 138 g
 Gross weight 168 g
 Lumens 300 lm
 Battery capacity 2 pcs AAA batteries
 Function
 1. Frosted shell, 100 decibel sound, long beep, double siren mode
 2. Six pronunciation modes, lights flicker with sound


Qty / carton 100 pcs
 Measurement / carton 62 x 23 x 47 cm
 Weight / carton 17.90 kg



ET3-E021

Material ABS
 Color Red / Blue / Orange / Green
 Dimension 10 x 5 x 4.5 cm
 Packaging dimension 10.5 x 5.5 x 7 cm
 Net weight 95 g
 Gross weight 127 g
 Lumens 250 lm
 Battery capacity 1200 mAh
 Function
 1. Not only the headlights, but also the electric horn and anti-theft alarm mode
 2. 140 high decibel, 5 kinds of sounds
 3. 80 meters long shot
 4. 3 modes: Strong light / Low light / Burst flash
 5. Free adjustment, split wire control

Qty / carton 80 pcs
 Measurement / carton 46 x 32 x 29.5 cm
 Weight / carton 11.10 kg

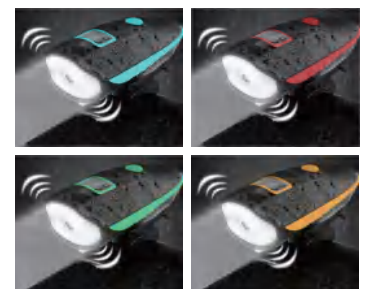

LED Bicycle Front Light



ET3-E022

Material	ABS
Color	Green / Red / Blue
Dimension	11 x 5.2 x 3.1 cm
Packaging dimension	11.2 x 6.2 x 5.5 cm
Net weight	200 g
Gross weight	230 g
Lumens	800 lm
Battery capacity	2000 mAh / 4000 mAh
Function	<ol style="list-style-type: none"> 1. Double lights are on, the brightness can be adjusted naturally 2. Five horn sounds, long press for 5 seconds to switch the horn sound 3. Smart mode function 4. 4 grid battery display function
Qty / carton	80 pcs
Measurement / carton	45 x 30 x 29 cm
Weight / carton	19.40 kg



ET3-E023

Material	ABS
Color	Red
Dimension	8.5 x 2 x 3 cm
Packaging dimension	10.8 x 3.5 x 12.4 cm
Certified Product	CE Approved
Net weight	113 g
Gross weight	147 g
Lumens	350 lm
Battery capacity	2600 mAh
Function	<ol style="list-style-type: none"> 1. T6 bright lights, anti-skid design, USB charging 2. Five modes: Weak / Mid - range / High - end / Flash / SOS
Qty / carton	100 pcs
Measurement / carton	39 x 57 x 22 cm
Weight / carton	16.00 kg




ET3-E025

Material	ABS
Color	Black
Dimension	10.5 x 5 x 3 cm
Packaging dimension	15.5 x 9.3 x 6 cm
Certified Product	CE Approved
Net weight	214 g
Gross weight	244 g
Lumens	600 - 2000 lm
Battery capacity	4400 mAh
Function	<ol style="list-style-type: none"> 1. Deep waterproof 2. USB direct charge, no battery removal, convenient and practical 3. Double light source, the illumination range is about 120 degrees 4. Four - speed mode: Low light / Medium light / High light / Burst flash
Qty / carton	50 pcs
Measurement / carton	48 x 34 x 33.5 cm
Weight / carton	13.00 kg



ET3-E026

Material	ABS
Color	Black / Red / Blue / Green
Dimension	7.5 x 2.5 x 6 cm
Packaging dimension	15 x 7.5 x 5.4 cm
Net weight	70 g
Gross weight	100 g
Lumens	350 lm
Battery capacity	1200 mAh
Function	<ol style="list-style-type: none"> 1. 5 kinds of sound modes, 140 high - decibel speakers, long press for 5 seconds to switch 5 kinds of sounds 2. Multi - mode front light, switch at will: Low light / Slight / Breathing light / Strobe light / SOS
Qty / carton	100 pcs
Measurement / carton	56 x 26 x 39 cm
Weight / carton	11.00 kg





ET3-E027

Material	ABS
Color	Black / White
Dimension	10 x 5 x 4 cm
Packaging dimension	13.5 x 9 x 5.5 cm
Net weight	70 g
Gross weight	145 g
Lumens	240 lm
Battery capacity	100 mAh
Function	<ol style="list-style-type: none"> 1. Lighting mode: strong light, low light, burst flash, long press for 3 seconds SOS 2. 360 rotating car clip 3. Charging time: USB charging 6 hours, solar energy 12 hours 4. Discharge time: 6 hours in strong light, low light
Qty / carton	120 pcs
Measurement / carton	55.5 x 30.5 x 59.5 cm
Weight / carton	18.00 kg



ET3-E028

Material	ABS
Color	Black / Orange / Silver / Green
Dimension	12 x 5 x 3 cm
Packaging dimension	18.5 x 13.3 x 4 cm
Certified product	CE Approved
Net weight	165 g
Gross weight	195 g
Lumens	500 lm
Battery capacity	4000 mAh 18650 Lithium battery / 2pcs
Function	<ol style="list-style-type: none"> 1. Double - lamp large floodlight front light, strong light / low light / burst flash, strong light of work light, weak light of work light 2. Bottom magnet COB work light 3. USB interface
Qty / carton	90 pcs
Measurement / carton	57.5 x 42 x 42 cm
Weight / carton	19.00 kg



ET3-E029

Material	ABS
Color	Black
Dimension	10.5 x 4.8 x 3.6 cm
Packaging dimension	16.6 x 16.5 x 4 cm
Certified product	CE Approved
Net weight	191 g
Gross weight	211 g
Lumens	1000 lm
Battery capacity	5200 mAh
Function	<ol style="list-style-type: none"> 1. Three light modes: strong light, low light flash 2. Highlight COB LED light board 3. USB fast charge
Qty / carton	100 pcs
Measurement / carton	65 x 34 x 35 cm
Weight / carton	22.00 kg



ET3-E030

Material	ABS
Color	Black
Dimension	8 x 2.9 x 4.8 cm
Packaging dimension	20 x 7.5 x 3.8 cm
Certified product	CE Approved
Waterproof rating	IP 64
Net weight	152 g
Gross weight	182 g
Lumens	450 lm
Battery capacity	1800 mAh
Function	<p>Illumination gear: 5 gear modes (Low / Medium / High / Strobe flash / SOS)</p>
Qty / carton	50 pcs
Measurement / carton	40 x 40 x 47 cm
Weight / carton	10.00 kg





ET3-E031

Material	ABS
Color	Black / Red / Blue / White
Dimension	6.1 x 4.5 x 5.5 cm
Net weight	56 g
Gross weight	76 g
Battery capacity	Use 3 ordinary AAA batteries
Function	There are 7 LEDs, 5 white LEDs + 2 red LEDs (2 red LEDs on 2 sides, 5 white LEDs on the front) It lights up very beautifully at night. The brightness is very good and can be used as a warning headlight.
Qty / carton	240 pcs
Measurement / carton	54 x 40 x 50 cm
Weight/carton	19.50 kg



ET3-E032

Material	Aluminum alloy
Color	Black
Light source	10 w T6 LED
Dimension	12 x 5 x 3 cm
Packaging dimension	18.5 x 13.3 x 4 cm
Protection level	IP 65
Certified product	CE Approved
Net weight	109 g
Gross weight	133 g
Lumens	380 lm
Use time	4 hours under strong light
Shell material	6063 - T6 aluminum alloy + PC plastic parts
Battery capacity	2500 mAh 18650 lithium battery
Function	1. Rotary switch: OFF / Strong light / Medium light / Low light / Burst flash 2. Strong light about 100 meters range
Qty / carton	120 pcs
Measurement / carton	57.5 x 42 x 42 cm
Weight / carton	17.00 kg



ET3-E033

Material	Carbon fiber
Color	Black
Dimension	12 x 5 x 3 cm
Packaging dimension	18.5 x 13.3 x 4 cm
Protection level	IP 65
Certified product	CE Approved
Net weight	109 g
Gross weight	133 g
Lumens	400 lm
Use time	4 hours under strong light
Shell material	Carbon fiber + PC plastic parts
Battery capacity	LG 3350mAh 18650 lithium battery
Function	1. Rotary switch: OFF / Strong light / Medium light / Low light / Burst flash 2. Strong light about 100 meters range
Qty / carton	120 pcs
Measurement / carton	57.5 x 42 x 42 cm
Weight / carton	17.00 kg



ET3-E034

Material	ABS
Color	Black
Dimension	10.5 x 5 x 3 cm
Packaging dimension	14.5 x 12 x 4 cm
Certified product	CE Approved
Net weight	127 g
Gross weight	157 g
Lumens	350 lm
Battery capacity	2200 mAh
Function	High light 4.5 h / Low light 8 h / Blink / 10 h
Qty / carton	100 pcs
Measurement / carton	68 x 32 x 40 cm
Weight / carton	16.70 kg






ET3-E035

Material	ABS
Color	Black
Dimension	8.5 x 4.5 x 3.8 cm
Packaging dimension	12 x 9.5 x 4 cm
Certified product	CE Approved
Net weight	272 g
Gross weight	302 g
Lumens	600 - 2400 lm
Battery capacity	4000 mAh
Function	The main light is switched to five levels, High bright / Medium bright / Low bright / Double - click fast flashing / Long press SOS / Auxiliary lamp 4 levels adjustment / White light is high and low light / red light is long and red light is flashing
Qty / carton	60 pcs
Measurement / carton	44 x 26 x 29.5 cm
Weight / carton	18.90 kg



ET3-E036

Material	ABS
Color	Red / Blue / Yellow / Green / Pink / White
Dimension	11 x 4.5 x 3.5 cm
Packaging dimension	11.7 x 7.6 x 5 cm
Net weight	112 g
Gross weight	142 g
Lumens	400 lm
Charging method	USB direct charging
Battery capacity	2000 mAh 18650 lithium battery (with protection board)
Function	1. The front light switch is a hidden touch switch (the light is turned on for about 3 seconds when the finger touches the switch, and the operation of turning off the light is the same) 2. Volume decibels: 130 decibels 3. Five modes: Strong light / Medium light / Low light / Fast flash / Slow flash
Qty / carton	75 pcs
Measurement / carton	40 x 37 x 27 cm
Weight / carton	11.70 kg

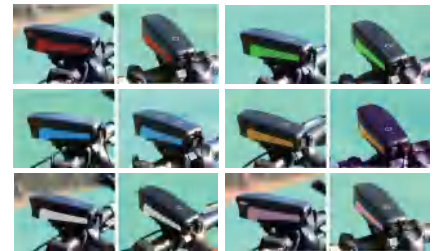

ET3-E037

Material	ABS
Color	Black
Dimension	10.5 x 3.5 x 2 cm
Packaging dimension	14 x 9.2 x 4.7 cm
Certified product	CE Approved
Net weight	99 g
Gross weight	129 g
Lumens	250 lm
Battery capacity	1500 mAh 18650 Lithium Battery
Function	1. Four modes: Smart mode / Strong light / Low light / Screen flash 2. Strong light battery life up to 3 hours 3. The power display is 75 % / 50 % / 25 %, the power display is clearer
Qty / carton	100 pcs
Measurement / carton	48 x 29.3 x 49.5 cm
Weight / carton	14.20 kg



ET3-E038

Material	ABS
Color	Silver
Dimension	10 x 5 x 3.5 cm
Packaging dimension	16.7 x 8.5 x 4 cm
Net weight	100 g
Gross weight	130 g
Lumens	250 lm
Battery capacity	1200 mAh
Function	1. Light / Speaker / USB & Solar Charge 3 in 1 2. High - decibel speakers 140 3. Three modes: High light / Low light / Flashing
Qty / carton	100 pcs
Measurement / carton	43 x 31 x 22.5 cm
Weight / carton	13.50 kg






ET3-E039

Material ABS
 Color Black / Blue / Silver
 Dimension 9.2 x 4.2 x 4.5 cm
 Packaging dimension 10.8 x 5.2 x 11.2 cm
 Net weight 83 g
 Gross weight 111 g
 Lumens Upper light: 120 / Lower light: 90
 Battery capacity 3.7 V Lithium Battery
 Function Independent double lamp design, high beam + floodlight, free combination of brightness

Qty / carton 60 pcs
 Measurement / carton 56 x 26.5 x 23 cm
 Weight / carton 7.50 kg

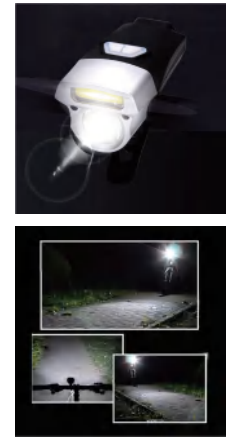

ET3-E041

Material Plastic
 Color Black
 Dimension 8 x 4.5 x 2.5 cm
 Packaging dimension 8 x 7 x 5 cm
 Net weight 69 g
 Gross weight 104 g
 Lumens 300 lm
 Battery capacity 1200 mAh
 Function

1. Touch to switch on, convenient and sensitive control, longer service life
2. Multiple modes, three levels of brightness: Ultra - low brightness / Medium brightness / And ultra - high brightness: Two special modes: Strobe / Beacon
3. Automatic adjustment: advanced temperature control module, strong heat dissipation performance

Qty / carton 120 pcs
 Measurement / carton 37.5 x 34.5 x 34 cm
 Weight / carton 13.60 kg




ET3-E042

Material ABS
 Color Black / Golden
 Dimension 7.5 x 6.5 x 4.3 cm
 Packaging dimension 9 x 8.6 x 9 cm
 Net weight 182 g
 Gross weight 207 g
 Lumens 350 lm
 Battery capacity 1800 mAh
 Function

1. USB charging car headlight
2. Three gears control light: Touch to switch gears / Strong light / Low light / Burst flashing
3. Life - level waterproof / Rainproof / Damp / Please do not soak in rain for a long time
4. Free zoom, turn left and right to adjust the light

Qty / carton 75 pcs
 Measurement / carton 48 x 48 x 27.5 cm
 Weight / carton 16.70 kg

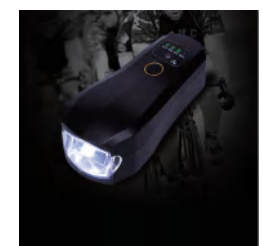

ET3-E043

Material ABS
 Color Black
 Dimension 8 x 4.5 x 2.5 cm
 Packaging dimension 8 x 7 x 5 cm
 Net weight 51 g
 Gross weight 81 g
 Lumens 300 lm
 Battery capacity 1200 mAh
 Qty / carton 125 pcs
 Measurement / carton 42 x 37 x 70 cm
 Weight / carton 11.13 kg





ET3-E044

Material	ABS
Color	Black
Dimension	8 x 4.5 x 2.5 cm
Packaging dimension	8 x 7 x 5 cm
Net weight	51 g
Gross weight	81 g
Lumens	300 lm
Battery capacity	1200 mAh
Qty / carton	125 pcs
Measurement / carton	42 x 37 x 70 cm
Weight / carton	11.13 kg



ET3-E045

Material	ABS
Color	Black
Dimension	10.7 x 4 x 3.5 cm
Packaging dimension	11 x 6 x 5.5 cm
Certified product	CE Approved
Net weight	118 g
Gross weight	148 g
Lumens	350 lm
Battery capacity	1800 mAh
Function	<ol style="list-style-type: none"> 1. 140 decibel single speaker, 5 kinds of sounds, long press the horn switch to freely switch between five modes 2. Four modes: high light, medium light, slow flash, burst flash 3. USB charging, automatic power off when full
Qty / carton	80 pcs
Measurement / carton	49.5 x 34 x 56 cm
Weight / carton	15.72 kg



ET3-E046

Material	ABS
Color	Black / Red / Silver
Dimension	10.5 x 5.7 x 4.1 cm
Packaging dimension	11 x 6 x 7.5 cm
Net weight	100 g
Gross weight	132 g
Lumens	300 lm
Battery capacity	1500 mAh
Function	<ol style="list-style-type: none"> 1. Four lighting modes: strong light, low light, flashing light, flood light yellow 2. Power display with code meter system 3. 120 decibel tweeter, six sound effects, one-key switch. 38cm extended split wire control 4. Daily waterproof
Qty / carton	125 pcs
Measurement / carton	57 x 52 x 39.5 cm
Weight / carton	17.5 kg



ET3-E049

Material	ABS
Color	Black / Red / Silver
Dimension	10.5 x 5.7 x 4.1 cm
Packaging dimension	11 x 6 x 7.5 cm
Certified product	CE Approved
Net weight	100 g
Gross weight	130 g
Lumens	300 lm
Battery capacity	1500 mAh
Function	<ol style="list-style-type: none"> 1. Four lighting modes: Strong light / Low light / Flash / Floodlight yellow 2. 120 decibel tweeter, six sound effects, one key switch. 38CM extended split wire control 3. Daily waterproof
Qty / carton	100 pcs
Measurement / carton	39.5 x 39.5 x 47 cm
Weight / carton	14.00 kg





ET3-E050

Material ABS
 Color Black
 Dimension 8 x 3.5 x 3 cm
 Packaging dimension 9 x 5.3 x 6.5 cm
 Net weight 190 g
 Gross weight 210 g
 Lumens 300 lm
 Battery capacity 1200 mAh
 Function
 1. Three modes, adjustable focus: Strong light / Low light / Burst flash
 2. Removable lithium battery
 3. Aluminum alloy material, USB direct charge

Qty / carton 75 pcs
 Measurement / carton 29 x 28.5 x 28.5 cm
 Weight / carton 19.80 kg



ET3-E051

Material ABS
 Color Black
 Dimension 6.4 x 3.2 x 2.5 cm
 Packaging dimension 7.6 x 4.2 x 14.1 cm
 Certified product CE Approved
 Net weight 130 g
 Gross weight 160 g
 Lumens 300 lm
 Battery capacity 2200 mAh
 Function
 1. Light weight and small size
 2. Efficient heat dissipation and protection of lamp beads
 3. Life waterproof
 4. Five lighting modes: High brightness / Medium brightness / Low brightness / Fast flashing / SOS

Qty / carton 75 pcs
 Measurement / carton 43.8 x 39.5 x 23 cm
 Weight / carton 13.00 kg



ET3-E052

Material ABS
 Color Black / Red / Silver
 Dimension 8.8 x 5.1 x 3.2 cm
 Packaging dimension 15.5 x 11.5 x 7.5 cm
 Net weight 190 g
 Gross weight 220 g
 Battery capacity 2000mAh lithium battery
 Function
 1. Far and near beam design, high beam endurance 2.5 hours, low beam endurance 5 hours
 2. Silicone waterproof switch, long press the switch button for 3 seconds to turn on
 3. 120 high - decibel speaker
 4. High brightness XPE lamp beads, intelligent vibration sensor, USB charging, high quality Waterproof performance

Qty / carton 45 pcs
 Measurement / carton 48 x 39.5 x 36 cm
 Weight / carton 10.90 kg



ET3-E053

Material ABS
 Color Silver / Black
 Dimension 10.2 x 2 x 2.1 cm
 Packaging dimension 10 x 5 x 2.5 cm
 Net weight 110 g
 Gross weight 160 g
 Battery capacity 800 mAh
 Function
 1. Mode: flashing, always on, off
 2. USB charging, solar panel, built - in speaker, 120 decibel loud speaker
 3. 5 LED highlight beads

Qty / carton 75 pcs
 Measurement / carton 52.5 x 52 x 29.5 cm
 Weight / carton 13.00 kg





ET3-E054

Material	ABS
Color	Black / Red / Blue
Dimension	5 x 14 x 5.5 cm
Packaging dimension	17 x 10 x 5 cm
Certified product	CE Approved
Net weight	243 g
Gross weight	273 g
Material	ABS engineering plastic
Battery capacity	4000 mAh
Function	1. 130 high - decibel speaker 2. Mobile phone holder, front light, power bank, speaker function integrated 3. Three modes: strong light / low light / burst flash
Qty / carton	60 pcs
Measurement / carton	53.5 X 36.5 X 39 cm
Weight / carton	19.00 kg



ET3-E055

Material	ABS
Color	Blue / Red / Green / Orange / Pink / Black
Lamp beads	XPE
Waterproof rating	IP X6
Dimension	10.2 x 5.1 cm
Packaging dimension	10.5 x 5.5 x 7 cm
Net weight	85 g
Gross weight	111 g
Lumens	250 lm
Function	Rechargeable / Strong light / Low light / SOS light / Fast flash / Slow flash
Qty / carton	125 pcs
Measurement / carton	54.5 x 29.5 x 37 cm
Weight / carton	14.90 kg



ET3-E056

Material	ABS
Color	Blue / Grey / Black Red / Black Blue / Black Orange
Lamp beads	T6
Waterproof rating	IP X5
Dimension	10.4 x 6.5 cm
Packaging dimension	10.5 x 5.5 x 7 cm
Net weight	85 g
Gross weight	100 g
Volume decibel	140 decibels
Lumens	350 lm
Battery capacity	2000 mAh
Function	Bright light file: 350 lumens battery life ~ 3.2 hours / Low light level: 180 lumens battery life ~ 6 hours / Flash file: 180 lumens battery life ~ 4 hours / Slow flash file: 320 lumens battery life ~ 5 hours
Qty / carton	125 pcs
Measurement / carton	54.5 x 29.5 x 37 cm
Weight / carton	12.50 kg



ET3-E057

Material	ABS
Color	Black / Red / Blue / Silver / Gold
Waterproof rating	Daily life waterproof
Dimension	8 x 3.5 x 3 cm
Packaging dimension	11.6 x 9.7 x 3.5 cm
Net weight	46 g
Gross weight	76 g
Lumens	55 lm
Battery capacity	500 mAh (14500 rechargeable li - on battery)
Function	Four modes: Strong light mode (> 3 h) / Medium light mode (> 5 h) / Low light mode (> 7.5 h) / blinking mode (> 4.5 h) / Long press for 5 tseconds to turn off the light
Qty / carton	120 pcs
Measurement / carton	56.5 x 24.5 x 41 cm
Weight / carton	10.00 kg



LED Bicycle Front Light



ET3-E058

Material	ABS
Color	Black
Lamp beads	LED
Dimension	10.5 x 3.6 x 3.6 cm
Packaging dimension	16.8 x 16.5 x 4.1 cm
Net weight	105 g
Gross weight	135 g
Lumens	700 lm
Function	Strong light / Low light / Flash
Qty / carton	90 pcs
Measurement / carton	52 x 51.5 x 43 cm
Weight / carton	13.20 kg




ET3-E059

Material	ABS
Color	Black
Lamp beads	LED
Waterproof rating	IPX5
Dimension	8 x 3.5 x 3 cm
Packaging dimension	13.8 x 4.7 x 11.6 cm
Net weight	67 g
Gross weight	85 g
Lumens	300 lm
Battery capacity	1200 mAh
Function	Touch: strong light / medium light / low light / off ; Double - click:strobe flash / slow flash / sos / off ; Long press: enter forced constant current high power white light 10 w high power led
Charging time	1.5 - 2.5 hours to fully charge
Qty / carton	90 pcs
Measurement / carton	49 x 43.5 x 36.8 cm
Weight / carto	8.70 kg




ET3-E060

Material	ABS
Color	Black
Lamp beads	LED
Waterproof rating	IP X5
Dimension	7.7 x 4 x 2.5 cm
Packaging dimension	10 x 3.7 x 5.8 cm
Net weight	67 g
Gross weight	85 g
Lumens	300 lm
Battery capacity	200 mAh
Function	Touch: strong light / medium light / low light / off ; double-click: strobe flash / slow flash / sos / off ; Long press: enter forced constant current high power white light 10 w high power led
Charging time	1.5 - 2.5 hours to fully charge
Qty / carton	100 pcs
Measurement / carton	40.5 x 26.5 x 35.5 cm
Weight / carton	9.50 kg



ET3-E061

Material	PA
Color	Black
Lamp beads	T6
Waterproof rating	IP 65
Input	DC 5 V 1 A
Dimension	3.9 x 2 x 7.3 cm
Packaging dimension	11.3 x 63 x 56 cm
Net weight	117 g
Gross weight	133 g
Lumens	600 lm
Battery capacity	2200 mAh
Function	Strong light / Medium light / Low light / OFF / Double tap switch: Burst flash / Slow flash / SOS - OFF
Qty / carton	150 pcs
Measurement / carton	58 x 40 x 33.5 cm
Weight / carton	20.00 kg

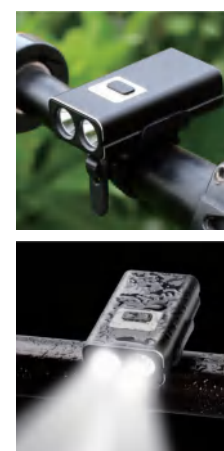




ET3-E062

Material	ABS Plastic
Color	Black
Lamp beads	T6
Dimension	13 x 3.4 x 3.6 cm
Packaging dimension	16 x 12 x 4.7 cm
Net weight	107 g
Gross weight	137 g
Lumens	450 lm
Function	1. Strong light mode (infinitely dimmable) / low light mode (infinitely dimmable) / light sensing mode 2. Fast flashing mode / Slow flashing mode / SOS mode
Qty / carton	150 pcs
Measurement / carton	62 x 49.5 x 49 cm
Weight / carton	21.50 kg



ET3-E063

Material	ABS Plastic
Color	Black / Blue / Red
Lamp beads	T6
Dimension	3.9 x 2 x 7.3 cm
Packaging dimension	8.5 x 4.5 x 6.5 cm
Net weight	65 g
Gross weight	95 g
Lumens	300 lm
Battery capacity	1200 mAh
Function	High light / low light / SOS flashing / Fast flashing off
Discharge time	4 hours of strong light / 8 hours of low light / 8 hours of fast flashing / 16 hours of sos mode, Tail light: 90 hours of constant light / 180 hours of flashing.
Qty / carton	200 pcs
Measurement / carton	44.5 x 38 x 34.5 cm
Weight / carton	19.80 kg



ET3-E064

Material	PVC
Color	Black / Blue / Red
Lamp beads	T6
Waterproof rating	IP X4
Dimension	10 x 3.2 x 2.4 cm
Packaging dimension	10 x 10 x 5 cm
Net weight	134 g
Gross weight	152 g
Lumens	350 lm
Battery capacity	1200 mAh
Voltage frequency	50 / 60 Hz
AC voltage	100-240 volts
Function	High light / Low light - SOS flashing / Fast flashing off
Discharge time	3.5-5 hours
Qty / carton	120 pcs
Measurement / carton	51 x 30 x 47 cm
Weight / carton	19.20 kg



ET3-E065

Material	Aluminum alloy
Color	Black
Lamp beads	CREE XPG
Waterproof rating	Daily life waterproof
Dimension	10.2 x 20 x 14 cm
Packaging dimension	14.2 x 91 x 45 cm
Dimension	10 x 3.38 x 2.28 cm
Net weight	106 g
Gross weight	136 g
Lumens	200 - 400 lm (optional)
Battery capacity	300 lm
Voltage frequency	50 / 60 Hz
AC voltage	100-240 volts
Function	Highlight / Medium / Blink
Charging time	About 3 / h battery life 2 - 8 / h
Qty / carton	150 pcs
Measurement / carton	47.5 x 47 x 44.5 cm
Weight / carton	21.40 kg



LED Bicycle Front Light




ET3-E066

Material	Aluminum alloy
Color	Black / Red / Blue / Silver
Lamp beads	LED LAMP BEADS
Waterproof rating	IP X6
Input	DC 5 V 1 A
Dimension	10.4 x 5 x 3.4 cm
Packaging dimension	15.5 x 9.3 x 6 cm
Net weight	276 g
Gross weight	315 g
Lumens	800 lm
Battery capacity	2500 mAh
Function	Strong light mode / Low light mode / White and yellow alternate flashing / Warning light / Red and blue warning light
Qty / carton	40 pcs
Measurement / carton	43.5 x 34 x 41 cm
Weight / carton	13.60 kg



ET3-E067

Material	ABS engineering plastic + silicone gasket
Color	Black / Black blue / Black red
Lamp beads	2 x T6
Dimension	13 x 6.4 x 11.5 cm
Packaging dimension	16.5 x 13.5 x 6 cm
Net weight	310 g
Gross weight	375 g
Lumens	550 lm
Function	Highlight - medium - bright - strobe
Qty / carton	60 pcs
Measurement / carton	72 x 36 x 39 cm
Weight / carton	22.50 kg

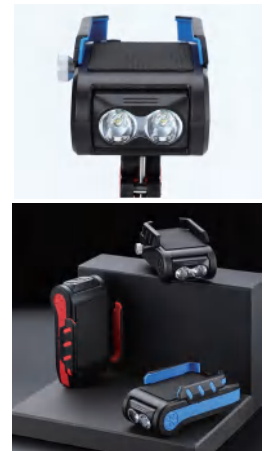

ET3-E068

Material	ABS material + silicone strap
Color	Black and Red / Black and Blue / Black and Green / Black and Orange
Lamp beads	T6
Dimension	11 x 4 x 7 cm
Packaging dimension	12 x 10.5 x 4.5 cm
Net weight	145 g
Gross weight	180 g
Lumens	300 lm
Battery capacity	200 mAh
Function	Strong light (350lm) / Low light (200 lm) / Flash (350 lm)
Qty / carton	120 pcs
Measurement / carton	62 x 33 x 53 cm
Weight / carton	21.60 kg



ET3-E074

Material	Aluminum alloy + ABS engineering plastics + silicone gasket
Color	Black
Lamp beads	3 x XML LED
Waterproof rating	IP X4
Dimension	10.3 x 4.2 x 8.4 cm
Packaging dimension	15 x 13 x 4 cm
Net weight	232 g
Gross weight	295 g
Lumens	750 lm
Battery capacity	3000 mAh
Function	High light / Medium light / Low light / Strobe flash / SOS flash
Qty / carton	72 pcs
Measurement / carton	47 x 41 x 34 cm
Weight / carton	21.20 kg





ET3-E076

Material Aluminum alloy + ABS engineering plastics + silicone gasket
 Color Black
 Lamp beads Xinrui Luming LML2AW - 80 (15 w)
 Dimension 10.2 x 5.1 cm
 Packaging dimension 10.5 x 5.5 x 10 cm
 Net weight 86 g
 Gross weight 118 g
 Lumens 600 lm
 Battery capacity 4200 mAh
 Function High light / medium light / low light / fast flashing / SOS flashing / burst flashing
 Qty / carton 50 pcs
 Measurement / carton 57.5 x 33.8 x 25 cm
 Weight / carton 15.00 kg



ET3-E077

Material ABS
 Color Blue / Red / Green / Orange / Pink / Black
 Lamp beads XPE
 Dimension 10.2 x 5.1 cm
 Packaging dimension 10.5 x 5.5 x 10 cm
 Net weight 86 g
 Gross weight 118 g
 Lumens 250 lm
 Function Charging model: Strong light / Low light / SOS / Slow flashing
 Battery type: Strong light / Fast flashing / Slow flashing
 Qty / carton 54 pcs
 Measurement / carton 35 x 33 x 32 cm
 Weight / carton 7.00 kg



ET3-E078

Material Aluminum alloy + POM plastic bracket + silicone gasket
 Color Black / Blue / Red
 Lamp beads 2 x T6
 Dimension 11.2 x 9 x 4.6 cm
 Packaging dimension 18.5 x 10.5 x 4.6 cm
 Net weight 276 g
 Gross weight 338 g
 Lumens 1800 lm
 Battery capacity 4800 mAh
 Function High light - medium light-low light - flashing - SOS flashing
 Qty / carton 54 pcs
 Measurement / carton 57 x 33.5 x 29.5 cm
 Weight / carton 18.00 kg



ET3-E079

Material Aluminum alloy + POM plastic bracket + silicone gasket
 Color Black
 Lamp beads 4 x T6
 Waterproof rating IP X4
 Dimension 11.2 x 9 x 4.6 cm
 Packaging dimension 16.5 x 5.5 x 13 cm
 Net weight 310 g
 Gross weight 390 g
 Lumens 1800 lm
 Battery capacity 5000 mAh
 Function High light - medium light - low light - flashing - SOS flashing
 Qty / carton 40 pcs
 Measurement / carton 52.5 x 33.2 x 30 cm
 Weight / carton 16.40 kg





ET3-E080

Material High light ABS
 Color Black / Red / Blue / Green
 Lamp beads 2 x T6
 Waterproof rating IP X6
 Input DC 5 V 1 A
 Dimension 13 x 6 x 3 cm
 Packaging dimension 17 x 12.5 x 6 cm
 Net weight 188 g
 Gross weight 234 g
 Lumens
 Battery capacity 4000 mAh
 Function Strong light / low light / strobe flash / fog light / fog light flash

Qty / carton 40 pcs
 Measurement / carton 52.5 x 33.2 x 30 cm
 Weight / carton 16.40 kg



ET3-E081

Material Aluminum alloy + PP plastic
 Color Black
 Lamp beads 2 x T6
 Waterproof rating IP X6
 Input DC 5 V 1 A
 Dimension 7.1 x 4.2 x 2.4 cm
 Packaging dimension 18.5 x 6 x 5.4 cm
 Net weight 95 g
 Gross weight 130 g
 Lumens 600 lm
 Battery capacity 1500 mAh
 Function High light - medium light - low light - flashing high light (600 lumens) medium light (400 lumens) low light (200 lumens) flashing (600 lumens)

Qty / carton 70 pcs
 Measurement / carton 46 x 30 x 29 cm
 Weight / carton 9.10 kg



ET3-E082

Material Aluminum alloy + PP plastic
 Color Red / White Green / Black and Orange
 Lamp beads 2 X T6
 Dimension 6 x 4 x 3 cm
 Packaging dimension 8 x 9.5 x 4 cm
 Net weight 60 g
 Gross weight 63 g
 Lumens 600 lm
 Battery capacity 1500 mAh
 Function Long bright / fast flashing / slow flashing

Qty / carton 250 pcs
 Measurement / carton 49 x 42 x 42 cm
 Weight / carton 15.60 kg



ET3-E083

Material Aluminum alloy + PP plastic
 Color Blue / Red
 Lamp beads COB
 Dimension 6.5 x 4.3 x 3.4 cm
 Packaging dimension 17.8 x 10.4 x 3.9 cm
 Net weight 103 g
 Gross weight 143 g
 Lumens 300 lm
 Battery capacity 1200 mAh
 Function There are six light modes that can be switched freely according to the situation

Qty / carton 45 pcs
 Measurement / carton 55 x 33 x 21.5 cm
 Weight / carton 6.43 kg



ET3-E084

Material ABS
 Color Black / Blue / Red
 Lamp beads T6
 Dimension 10.5 x 3.5 x 3.5 cm
 Packaging dimension 11 x 4 x 6 cm
 Net weight 116 g
 Gross weight 129 g
 Lumens 180 lm
 Battery capacity 1000 mAh
 Function Highlight / Medium Light / Flash

Qty / carton 120 pcs
 Measurement / carton 43 x 29 x 36 cm
 Weight / carton 16.50 kg





ET3-E085

Material ABS
 Color Black / Red / Blue / Green / Yellow
 Lamp beads T6
 Dimension 10.5 x 3.5 x 4 cm
 Packaging dimension 14.6 x 8.8 x 4.3 cm
 Net weight 113 g
 Gross weight 123g
 Lumens 400 lm
 Battery capacity 1200 mAh
 Function Highlight / medium light / low light / flash / SOS
 Qty / carton 120 pcs
 Measurement / carton 43 x 45 x 32 cm
 Weight / carton 16.50 kg



ET3-E086

Material ABS material + silicone strap
 Color Red / Blue / Green / Silver
 Lamp beads 2 x T6
 Dimension 10.5 x 5 x 2.5 cm
 Packaging dimension 15 x 9.5 x 6.7 cm
 Net weight 199 g
 Gross weight 248g
 Lumens 500 lm
 Battery capacity 4000 mAh
 Function Strong light / Weak light / Flash
 Qty / carton 120 pcs
 Measurement / carton 49 x 44 x 44 cm
 Weight / carton 30.00 kg



ET3-E087

Material ABS+LED beads
 Color Black/Blue/Red/Orange
 Dimension 5.5-8x10.5 cm
 Packaging dimension 63x33.5x51 cm
 Net weight 250g
 Gross weight 20 KG
 Charging Type C
 Function 130 decibels high volume, five speaker effects, high brightness headlights
 Qty / carton 80 pcs



ET3-E088

Material ABS+Dual T6 LED Beads
 Color Black/Blue/Red/Orange
 Dimension 13.85x6.1 cm
 Packaging dimension 65x36x52 CM
 Net weight 267g
 Gross weight 23 KG
 Charging Type C
 Function 130 decibel high volume, five speaker effects, dual T6 LED beads, four modes and multiple functions combined into one
 Qty / carton 80 pcs



ET3-E089

Material ABS factory plastic+PC silicone
 Color Black/Blue/Red
 Dimension 13.5x6.6 cm
 Packaging dimension 59x33x52.5 CM
 Net weight 211g
 Gross weight 22 KG
 Charging Type C
 Function 130 decibels high volume, only battery level display, dual source strong light illumination, four modes and multiple functions combined into one
 Qty / carton 80 pcs



BICYCLE - NEW LED REAR LIGHTS





ET3-D001

Material	High - strength PC material
Color	Red
Opening method	Long press on / off device for 1.58 seconds
Product weight	56 grams (including packaging)
Dimension	2.5 x 4 x 4 cm
Packaging dimension	9.5 x 7 x 4.5 cm
Net weight	33 g
Gross weight	53 g
Battery capacity	5 V adapter / USB 3.7 V 200 mAh
Function	Long light / 50% long light / fast flashing / Respiratory flashing / Bounce flashing
Lighting time	Long light 4 h 50 % 7 h fast flash 7 h breathing flash 7 h family flash 1 - 6 h flash 2 - 8 h
Qty / carton	125 pcs
Measurement / carton	49.5 x 37 x 24.5 cm
Weight / carton	6.60 kg



ET3-D002

Material	High - strength PC material
Color	Red
Battery	3.7 V 501 mAh
Charging time	2 h
Use time	Stable for 10 h / Fast flashing for 15 h / Forward flashing for 18 h / Fast flashing for 15 h / Continuous flashing for 20 h
USB charging coil	25 cm 1 A
Charging method	5V adapter, computer, USB charger baby
Turn on or off	Press and hold for 1.5 seconds
Dimension	6.8 x 2.8 x 2.5 cm
Packaging dimension	9.5 x 7 x 4.5 cm
Net weight	47 g
Gross weight	62 g
Function	Stable / Fast flash / Running flash
Qty / carton	125 pcs
Measurement / carton	49.5 x 37 x 24.5 cm
Weight / carton	7.80 kg



ET3-D003

Material	ABS
Color	Red / Transparent
Dimension	7 x 2 x 1.7 cm
Packaging dimension	9.5 x 7 x 4.5 cm
Net weight	38 g
Gross weight	53 g
Battery capacity	330 mAh
Function	High / Quick / Flashing / When switch on the light, it wont be light on in the strong ray of light as contains a light sensor, but it lights on in the low ray of light. With automatic sleep mode. The tail light senses that vibration sits on automatically.
Qty / carton	125 pcs
Measurement / carton	49.5 x 37 x 24.5 cm
Weight / carton	7.60 kg



ET3-D004

Material	ABS
Color	Black / Blue
Product dimension	8.3 x 2.6 x 2 cm
Packaging	11 x 10.5 x 3 cm
Net weight	47 g
Gross weight	62 g
Battery capacity	300 mAh
Function	Fast flashing / Slow flashing / Constant light / Built - in rechargeable battery.
Qty / carton	240 PCS
Measurement / carton	53 x 37 x 51 cm
Weight / carton	16.00 kg




LED Bicycle Rear Light



ET3-D005

Material	Aluminum alloy middle frame + ABS plastic
Color	Red
Lumens	100 lm
Handle diameter	12-32 mm
Dimension	4 x 4 x 1.5 cm
Packaging dimension	7.3 x 5.3 x 9 cm
Product net weight	37 g
Packed weight	67 g
Battery	3.7 V 500 mAh polymer lithium battery
Function	Smart brake : Llow light / Fast flash / Medium flash / Slow flash About 5 hours of battery life Ordinary gears : High light / Medium light / Weak light / Fast flash / Medium flash / Slow flash 3 - 5 hours of battery life

Qty / carton	125 pcs
Measurement / carton	47 x 38.5 x 28.5 cm
Weight / carton	9.40 kg

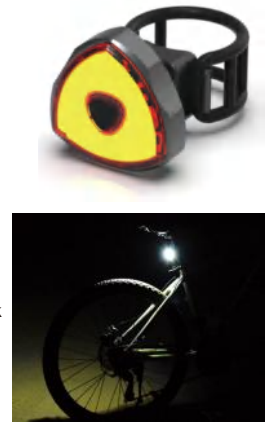

ET3-D006

Material	Aluminum alloy middle frame + ABS plastic
Color	Red
Dimension	4.3 x 3 x 1.5 cm
Packaging dimension	7.3 x 5.3 x 9 cm
Net weight	21 g
Gross weight	51 g
Function	The bike light will automatically enhance the brightness for 5s if any downhill, brake, deceleration is detected by G - sensor. 180 - Degree field of view width, visibility up to 150m, utilization of high - brightness COB LED + EnSca lens, bright light but not dazzling, all clearly visible for night no matter rain or fog.

Qty / carton	125 pcs
Measurement / carton	47 x 38.5 x 28.5 cm
Weight / carton	7.40 kg



ET3-D007


Material	PC + ABS
Color	Red
Waterproof grade	IPX6
Power supply	High brightness COB lamp beads
Dimension	7.1 x 2.1 x 2.1 cm
Packaging dimension	7.1 x 4.5 x 6.5 cm
Net weight	35 g
Gross weight	60 g
Lumens	110 lm
Battery	3.7 V 600 mAh lithium battery
Function	White / Red color changing / Red / Blue color changing / Hold switch on 3 seconds for light on / Hold 3 seconds for light off

Qty / carton	125 pcs
Measurement / carton	37.5 x 24.5 x 34.5 cm
Weight / carton	8.50 kg



ET3-D008

Material	ABS
Color	Black / Blue / Wine red / Gold / Gray
Protection level	IP 65
Double click switch	Turn on / off smart brake mode
Visual distance	200 meters
Dimension	4 x 4 x 2.3 cm
Packaging dimension	10 x 5.3 x 2.8 cm
Net weight	51 g
Gross weight	71 g
Lumens	15 lm
Battery	380 mAh
Function	Marquee / Tai Chi / Breath / Fast flash / Slow flash
Qty / carton	150 pcs
Measurement / carton	32 x 30 x 28.5 cm
Weight / carton	11.70 kg

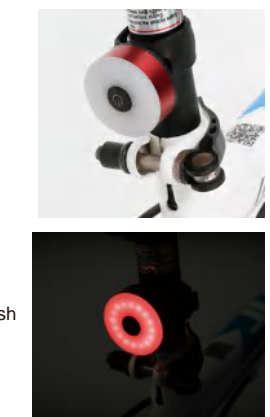



ET3-D009

Material	Black PC engineering plastic + aluminum alloy shell
Color	Black black / Black titanium / Black red / Black blue / Titanium silver
Dimension	3.5 x 4 x 4 cm
Packaging dimension	9.8 x 6.2 x 3.2 cm
Waterproof grade	IP 65
Lumens	15 lm
Battery	380 mAh
Function	Marquee / Tai Chi / Breath / Fast flash / Slow flash
Color options	Black / Blue / Gold / Grey / Dark Red
Qty / carton	150 pcs
Measurement / carton	45 x 32.5 x 21.5 cm
Weight / carton	5.10 kg



ET3-D010

Material	ABS
Color	Black
Dimension	4.3 x 5 x 2.9 cm
Packaging dimension	16 x 11 x 3.5 cm
Net weight	67g
Gross weight	100 g
Function	100 % brightness / Flashing
Qty / carton	100 pcs
Measurement / carton	60 x 28 x 43 cm
Weight / carton	10.00 kg



ET3-D011

Material	ABS
Color	Black
Dimension	7.6 x 2.6 x 2.2 cm
Packaging dimension	10.5 x 3.2 x 15.8 cm
Net weight	63 g
Gross weight	59 g
Battery capacity	700 mAh
Function	Smart light + constant light mode, smart off mode Intelligent displacement recognition technology, precise braking and super bright signal light Accidental fall and the tilt angle is greater than 50 degrees, intelligently identify and send out SOS distress signal
Qty / carton	100 pcs
Measurement / carton	43 x 27 x 61 cm
Weight / carton	8.90 kg



ET3-D012

Material	CNC frosted aluminum alloy
Color	Black
Dimension	3.6 x 3.6 x 4.1 cm base length 11.8"cm
Packaging dimension	11 x 8 x 3.5 cm
Net weight	56 g
Gross weight	78 g
Battery capacity	500 mAh
Function	Rhythm flashing / Fast flashing / Strobe flashing / Breathing light / Low light / Medium light / High light
Qty / carton	150 pcs
Measurement / carton	42 x 34.5 x 37 cm
Weight / carton	11.70 kg



LED Bicycle Rear Light



ET3-D013

Material	CNC frosted aluminum alloy
Color	Black
Dimension	4.2 x 4.2 x 2.3 cm base length 5.3cm
Packaging dimension	11 x 8 x 3.5 cm
Waterproof grade	IP X6
Product net weight	56 g
Packed weight	78 g
Lumens	100 lm
Battery	3.7 V 500 mAh polymer lithium battery
Function	Rhythm flashing / Fast flashing/ Strobe flashing / Breathing light / Low light / Medium light / High light
Qty / carton	150 pcs
Measurement / carton	42 x 34.5 x 37 cm
Weight / carton	11.70 kg



ET3-D014

Material	High strength ABS
Color	Black
LED	8 1206 side luminous LEDs
Dimension	9.8 x 6.5 x 3 cm
Packaging dimension	15.5 x 7.2 x 4 cm
Net weight	133 g
Gross weight	166 g
Battery	800 mAh
Function	Steadyon / Marquee / Flashing / Shutdown
Qty / carton	144 pcs
Measurement / carton	44 x 32.5 x 53 cm
Weight / carton	25.00 kg




ET3-D016

Material	PC + ABS
Color	Black
Dimension	6 x 5.2 x 3 cm
Packaging dimension	14.5 x 7.5 x 3.7 cm
Net weight	53 g
Gross weight	75 g
Lumens	160 lm
Function	Five patterns
Qty / carton	150 pcs
Measurement / carton	45 x 39 x 38.5 cm
Weight / carton	11.25 kg



ET3-D018

Material	6061 aluminum alloy
Color	Black
Dimension	5.2 x 5.3 x 3.9 cm
Packaging dimension	10.8 x 8 x 3.4 cm
Net weight	40 g
Gross weight	80 g
Protection level	IP 65
Lumens	15 lm
Battery	500 mAh
Function	Low light - Medium light - Highlight - Low light slow - Medium light slow - Highlight slow
Qty / carton	150 pcs
Measurement / carton	42 x 34 x 36 cm
Weight / carton	12.00 kg

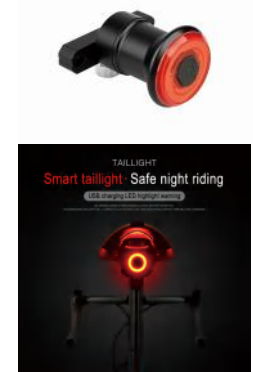




ET3-D020

Material	Aluminum alloy +PC
Color	Black
Dimension	3.6 x 2.7 x 1.8 cm
Packaging dimension	10.8 x 8 x 3.4 cm
Net weight	54 g
Gross weight	67 g
Waterproof grade	IP 65
Lumens	100 lm
Battery	500 mAh
Function	Low light - Medium light - Highlight - Low light slow - Medium light slow - Highlight slow
Qty / carton	150 pcs
Measurement / carton	34.5 x 42 x 36 cm
Weight / carton	11.40 kg



ET3-D021

Material	Aluminum alloy +PC
Color	Black
Dimension	3.7 x 3.4 x 2.3 cm
Packaging dimension	9.5 x 7 x 5.5 cm
Net weight	40 g
Gross weight	70 g
Waterproof grade	IP X4
Lumens	100 lm
Battery capacity	300 mAh
Function	Racing 1 / Racing 2 / breathing light / Flash / Slow Flash
Qty / carton	160 pcs
Measurement / carton	55 x 37.5 x 24.5 cm
Weight / carton	7.52 kg



ET3-D022

Material	ABS
Color	Red
Dimension	9 x 6 x 3.5 cm
Packaging dimension	10.2 x 6.5 x 4 cm
Net weight	25 g
Gross weight	47 g
Battery capacity	300 mAh
Function	First gear medium light / second gear strong light / third gear slow flashing / fourth gear flashing / fourth gear quick flashing
Qty / carton	240 pcs
Measurement / carton	42 x 34.5 x 37 cm
Weight / carton	11.28 kg



LED Bicycle Rear Light



ET3-D023

Material	Aluminum alloy +PC
Color	Black / Red
Dimension	8.4 x 2 x 2 cm
Packaging dimension	10 x 11 x 4.5 cm
Waterproof grade	IP X4
Net weight	77 g
Gross weight	114 g
Lumens	114 lm
Battery	500 mAh
Function	Main indicator: Steady on / slow blinking / quick blinking Left button: Left turn signal - flashes 5 times / right turn signal - flashes 5 times
Qty / carton	160 pcs
Measurement / carton	55 x 37.5 x 24.5 cm
Weight / carton	6.84 kg



ET3-D024

Material	Aluminum alloy + PC
Color	Black /Blue / Red
LED	2835
Dimension	7 x 2 x 2 cm
Packaging dimension	8.5 x 4 x 3.8 cm
Net weight	55 g
Gross weight	65 g
Lumens	30 lm
Battery	210 mAh
Function	Alternating slow flash - full lamp flash - alternating flash - normally on
Qty / carton	240 pcs
Measurement / carton	54 x 40 x 18.5 cm
Weight / carton	15.00 kg




BICYCLE - NEW MOBILE HOLDER






ET3-F001R

Material	ABC Material + silicone strap
Color	Red / Black
Packaging dimension	8 x 6 x 7 cm
Net weight	60 g
Gross weight	90 g
Qty / carton	100 pcs
Measurement / carton	42 x 31 x 35 cm
Weight / carton	9.00 kg

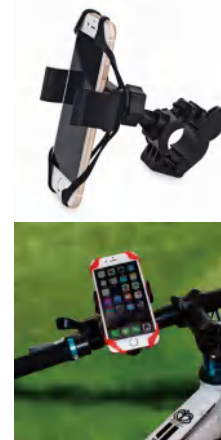

ET8-F001

Color	Black
Dimension	4.3 x 6.5 x 8 cm
Packaging dimension	4.2 x 4.6 x 8.3 cm
Material	AL6063 aluminum alloy fixing method
Fixed mode	Four-corner eagle claw, telescopic spiral
Fit the size	Width 55-100mm mobile phone clip diameter 22.2*31.8mm
Net weight	87 g
Gross weight	95 g
Qty / carton	100 pcs
Measurement	48 x 23 x 18.5 cm
Weight	10.7 kg

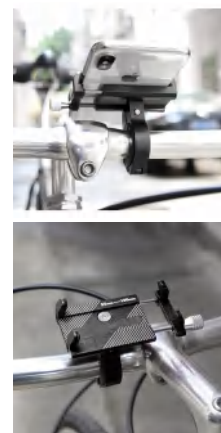

ET8-F002

Color	Black
Dimension	8.2 x 2.5 x 8 cm
Packaging dimension	8.4 x 4.6 x 8.3 cm
Material	AL6063 aluminum alloy fixing method
Fixed mode	Horizontal and vertical adjustment, four-jaw locking, mechanical locking
Fit the size	Width 55-100mm mobile phone clip diameter 22.2*31.8mm
Net weight	153 g
Gross weight	170 g
Qty / carton	100 pcs
Measurement	38 x 31 x 18.5 cm
Weight	11.1 kg



ET8-F003

Color	Black
Dimension	8.5 x 4 x 8 cm
Packaging dimension	8.4 x 4.6 x 8.3 cm
Material	AL6063 aluminum alloy fixing method
Fixed mode	The three-jaw lock is stable and anti-shake can be adjusted horizontally and vertically
Fit the size	Width 55-100mm mobile phone clip diameter 22.2*31.8mm
Net weight	107 g
Gross weight	116 g
Qty / carton	100 pcs
Measurement	38 x 31 x 18.5 cm
Weight	13 kg






ET8-F004

Color	Black
Dimension	8.5 x 6.5 x 10 cm
Packaging dimension	9.0 x 7.0 x 10.3 cm
Material	AL6063 aluminum alloy fixing method
Fixed mode	Mechanical locking
Fit the size	Width 45-68mm mobile phone 360 degree adjustable clip diameter 22.2*31.8mm
Net weight	197 g
Gross weight	227 g
Qty / carton	110 pcs
Measurement	63 x 40 x 50 cm
Weight	22.7 kg



ET8-F005

Color	Black
Dimension	8.5 x 6.5 x 10 cm
Packaging dimension	9.0 x 7.0 x 10.3 cm
Material	AL6063 aluminum alloy fixing method
Fixed mode	Mechanical locking
Fit the size	Width 45-68mm mobile phone 360 degree adjustable clip diameter 22.2*31.8mm
Net weight	222 g
Gross weight	250 g
Qty / carton	100 pcs
Measurement	63 x 40 x 50 cm
Weight	25kg



ET8-F006

Color	Black
Dimension	1.5 x 13.5 x 7.5 cm
Packaging dimension	15.5 x 14.0 x 8.0 cm
Material	PVC
Fixed mode	One-click locking
Fit the size	Width 35-68mm mobile phone 360 degree adjustable
Net weight	145 g
Gross weight	202 g
Qty / carton	100 pcs
Measurement	76 x 61 x 40 cm
Weight	21.65 kg



ET8-F007

Color	Black
Dimension	1.5 x 13.5 x 7.5 cm
Packaging dimension	15.5 x 14.0 x 8.0 cm
Material	AL6063 aluminum alloy fixing method
Fixed mode	PVC
Fit the size	One-click locking
Net weight	166 g
Gross weight	223 g
Qty / carton	100 pcs
Measurement	76 x 61 x 40 cm
Weight	23.55 kg



ET8-F008



Color	Black
Dimension	6.2 x 3 x 14 cm
Packaging dimension	7.0 x 3.5 x 14.5 cm
Material	AL6063 aluminum alloy fixing method
Fixed mode	One-click locking
Fit the size	Wide 62-92mm width mobile phone 14-18cm height mobile phone
Net weight	275 g
Gross weight	295 g
Qty / carton	50 pcs
Measurement	57 x 33 x 38 cm
Weight	17.95 kg



ET8-F009



Color	Black
Dimension	6.2 x 3 x 14 cm
Packaging dimension	7.0 x 3.5 x 14.5 cm
Material	AL6063 aluminum alloy fixing method
Fixed mode	One-click locking
Fit the size	Wide 62-92mm width mobile phone 14-18cm height mobile phone
Net weight	245 g
Gross weight	275 g
Qty / carton	100 pcs
Measurement	76 x 61 x 40 cm
Weight	23.55 kg

ET8-F010



Color	Black
Dimension	8 x 4 x 4 cm
Packaging dimension	9.3 x 5.5 x 3.4 cm
Material	AL6063 aluminum alloy fixing method
Fixed mode	Mechanical locking
Fit the size	Width 55-100mm width
Net weight	101 g
Gross weight	122 g
Qty / carton	100 pcs
Measurement	53 x 83 x 38 cm
Weight	12.20 kg



ET8-F011



Color	Black
Dimension	6.8 x 9.0 x 8.2 cm
Packaging dimension	9.3 x 5.5 x 3.4 cm
Material	AL6063 aluminum alloy fixing method
Fixed mode	Mechanical locking
Fit the size	Width 58-100mm width
Net weight	138 g
Gross weight	168 g
Qty / carton	100 pcs
Measurement	36 x 19 x 43 cm
Weight	17 kg





ET8-F012

Color	Black
Dimension	6.8 x 9.0 x 8.2 cm
Packaging dimension	9.3 x 5.5 x 3.4 cm
Material	AL6063 aluminum alloy fixing method
Fixed mode	Mechanical locking
Fit the size	Width 58-100mm width
Net weight	138 g
Gross weight	168 g
Qty / carton	100 pcs
Measurement	36 x 19 x 43 cm
Weight	17 kg



ET8-F013

Color	Black
Dimension	6.8 x 9.0 x 8.2 cm
Packaging dimension	8.5 x 8.5 x 11.9 cm
Material	AL6063 aluminum alloy fixing method
Fixed mode	Mechanical locking
Fit the size	Width 58-100mm width
Net weight	175 g
Gross weight	195 g
Qty / carton	100 pcs
Measurement	46 x 44 x 49 cm
Weight	17.5 kg



ET8-F014

Color	Black
Dimension	6.8 x 9.0 x 8.2 cm
Packaging dimension	8.5 x 8.5 x 11.9 cm
Material	AL6063 aluminum alloy fixing method
Fixed mode	Mechanical lock 360° rotation
Fit the size	Width 58-100mm width
Net weight	175 g
Gross weight	195 g
Qty / carton	100 pcs
Measurement	46 x 44 x 49 cm
Weight	17.5 kg



BICYCLE - NEW PUMPS






ET8-E001

Color	Yellow
Dimension	3.5 x 3.5 x 15.5 cm
Packaging dimension	4.5 x 4.5 x 20 cm
Material	Plastics
Net weight	82 g
Gross weight	100 g
Qty / carton	100 pcs
Measurement	48 x 23 x 18.5 cm
Weight	20 kg



ET8-E002

Color	Yellow
Dimension	1.5 x 1.5 x 25 cm
Packaging dimension	33.5 x 8.8 x 4.7 cm
Material	Aluminum alloy
Tire pressure	300psi
Net weight	168 g
Gross weight	198 g
Qty / carton	50 pcs
Measurement	44.5 x 30.5 x 47.5 cm
Weight	19.80 kg





ET8-E003

Color	Yellow
Dimension	7.5 x 7.5 x 31.5 cm
Packaging dimension	33.5 x 8.8 x 4.7 cm
Material	Aluminum alloy
Tire pressure	300psi
Net weight	191 g
Gross weight	245 g
Qty / carton	50 pcs
Measurement	44.5 x 30.5 x 47.5 cm
Weight	24.50 kg



ET8-E004

Color	Yellow
Dimension	2.5 x 6 x 23.5 cm
Packaging dimension	3.5 x 3.5 x 23 cm
Material	Nylon
Tire pressure	80psi
Net weight	119.5 g
Gross weight	198 g
Qty / carton	400 pcs
Measurement	45 x 35 x 26 cm
Weight	47.8 kg




ET8-E005

Color	Yellow
Dimension	2.9 x 2.9 x 21 cm
Packaging dimension	3.5 x 3.5 x 23 cm
Material	PP+ABS
Net weight	77 g
Gross weight	107 g
Qty / carton	400 pcs
Measurement	45 x 35 x 26 cm
Weight	21.5 kg




ET8-E006

Color	Yellow
Dimension	2.5 x 2.5 x 31 cm
Packaging dimension	3.5 x 3.5 x 40 cm
Material	Aluminum alloy
Tire pressure	120psi
Net weight	182.5 g
Gross weight	212.5g
Qty / carton	400 pcs
Measurement	45 x 35 x 26 cm
Weight	21.5 kg

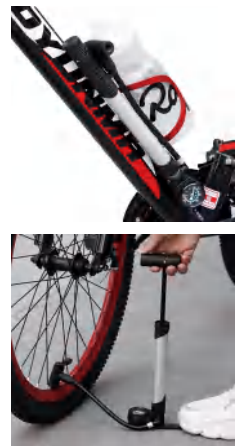


ET8-E007

Color	Yellow
Dimension	3.5 x 2.5 x 9.5 cm
Packaging dimension	4.0 x 10 x 10 cm
Material	Aluminum alloy
Net weight	52 g
Gross weight	82 g
Qty / carton	400 pcs
Measurement	45 x 35 x 26 cm
Weight	21.5 kg

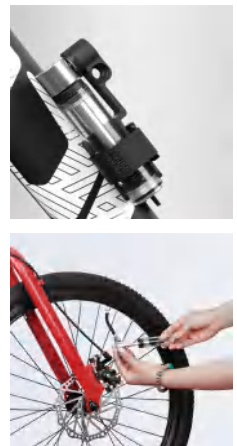

ET8-E008


Color	Yellow
Dimension	2.5 x 5.5 x 32.5 cm
Packaging dimension	4.0 x 10 x 35 cm
Material	Aluminum alloy+plastics
Net weight	208 g
Gross weight	230 g
Qty / carton	50 pcs
Measurement	46.5 x 45 x 30 cm
Weight	12.5 kg

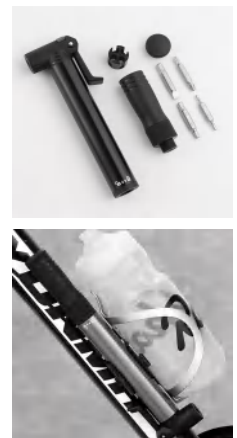



ET8-E009

Color	Yellow
Dimension	23.3 × 10 × 57 cm
Packaging dimension	30 × 10 × 58 cm
Material	Plastics
Tire pressure	230psi
Net weight	797 g
Gross weight	827 g
Qty / carton	10 pcs
Measurement	58 x 50 x 60 cm
Weight	8.27 kg

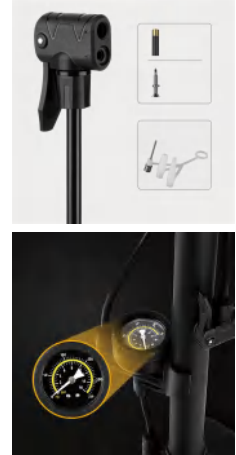


ET8-E010

Color	Yellow
Dimension	23 × 10 × 67 cm
Packaging dimension	25 × 10 × 68 cm
Material	Plastics
Tire pressure	230psi
Net weight	985 g
Gross weight	988 g
Qty / carton	10 pcs
Measurement	70 x 29 x 54 cm
Weight	11.5 kg




ET8-E011

Color	Yellow
Dimension	20 × 50 × 42 cm
Packaging dimension	25 × 45 × 40 cm
Material	Aluminum alloy+plastics
Tire pressure	230psi
Net weight	609 g
Gross weight	639 g
Qty / carton	10 pcs
Measurement	47 × 55 × 42 cm
Weight	8.6 kg

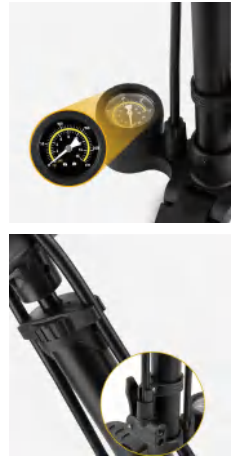

ET8-E012

Color	Yellow
Dimension	3.5 × 3.5 × 17.3 cm
Packaging dimension	20 × 10.5 × 10.5 cm
Material	Plastics
Tire pressure	120psi
Net weight	71 g
Gross weight	91 g
Qty / carton	50 pcs
Measurement	54.5 × 54.5 × 42 cm
Weight	8.6 kg

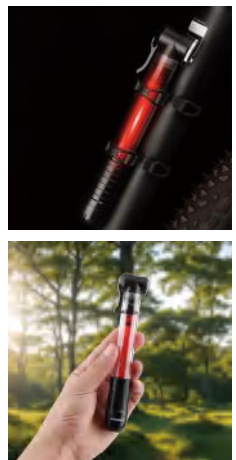




LED HEAD LIGHT




ET5-A019

LED	Jingrui - XD
Power	2 w
Lumen	100 lm
Range	55 m
Battery	500 mAh
Endurance	3-4 H
Protection level	IP 44
Weight	47 g
Product size	6.1 x 3.1 x 3.4 cm



ET5-A020

LED	Jingrui - XD
Power	5 w
Lumen	500 lm
Range	55 m
Battery	1000 mAh
Endurance	5.5 H
Protection level	IP 65
Weight	42g (Bare lamp) / 36g (Bare lamp)
Product size	6.1 x 3.1 x 3.4 cm





ET5-A021

LED	SZ140T
Power	2.5 w
Color	Black
Net weight	102 g
Lumens	160 lm
Battery capacity	1200mAh
Endurance	2.5 hours
Protection level	IP 42
Function	Strong light - Weak light - Flash - Off
Product size	5.1 x 6.5 x 8 cm




ET5-A022

LED	Jingrui - XD
Power	5 w
Color	Black
Net weight	42g (Bare lamp) 36g (Bare lamp)
Lumens	500 lm
Range	55 m
Battery capacity	1000mAh
Endurance	5.5 hours
Protection level	IP 65
Product size	6.1 x 3.1 x 3.4 cm





ET5-A023

LED	LED
Power	20 w
Color	Black
Net weight	225 g
Lumens	1600 lm
Battery capacity	2*18650 / 2000 mAh
Endurance	2.5 hours
Protection level	IP 32
Function	Strong light / medium light / low light / flash / SOS
Product size	4.1 x 4.1 x 6.7 cm



ET5-A024

LED	White
Power	3 w
Color	Black
Net weight	102g
Lumens	150 lm
Battery capacity	1*18650 / 800 mAh
Endurance	2.5 hours
Protection level	IP 32
Function	High light / low light / flash / off
Product size	5.1 x 6.5 x 8 cm





ET5-A025

LED 2*XMLT6+2*XPE+2*COB
Power 30 w
Color Black
Net weight 168 g
Lumens 500 lm
Battery capacity 2400mAh
Endurance 2-3 hours
Protection level IP X4
Function High light / medium light / low light / Red light flashing
Product size 12.5 x 9.5 x 9 cm




ET5-A026

LED CREE
Power 3 w
Color Black
Net weight 120 g
Lumens 150 g
Range 280 lm
Battery capacity 179 m
Endurance 103450 /1800 mAh
Protection level 2-7 hours
Function IP 66
Product size Light / Weak light / Flash
 8.8 x 6.3 x 6.7 cm



ET5-A027

LED SZ-5W140T134-DZ55
Power 5 w
Color Black
Net weight 191 g
Lumens 370 lm
Battery capacity 18650 /1500 mAh
Endurance 3 hours
Protection level IP 32
Function Light / Weak light / Flash
Product size 8.6 x 10.4 x 8 cm

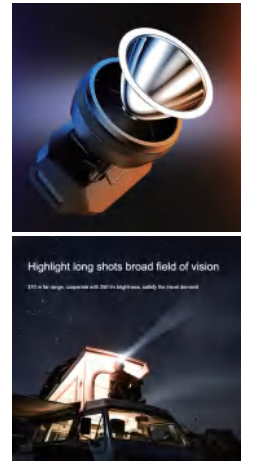

ET5-A028

LED CREE
Power 3 w
Color Black
Net weight 115 g
Lumens 300 lm
Battery capacity 1*NL853556/1800mAh
Endurance 6-12 hours
Protection level IP 66
Function High light / low light / flash / off
Product size 6.1 x 7.8 x 6.3 cm






ET5-A029

LED	CREE
Power	3 w
Color	Black
Net weight	110 g
Lumens	300 lm
Battery capacity	1*NL853556/1800mAh
Endurance	5-10 hours
Protection level	IP 42
Function	Light / Work / Stroboscopic light
Product size	8 x 6.3 x 5.7 cm




ET5-A035

LED	XML-T6+COB
Power	28 w 3.6 v
Color	Yellow
Net weight	502 g
	620g
Lumens	8000 lm
Range	200-500 m
Battery capacity	3 pcs*18650 7800 mAh
Endurance	25-75 H
Protection level	IP 68
Product size	6 x 6 x 10 cm



LED PEN LIGHT

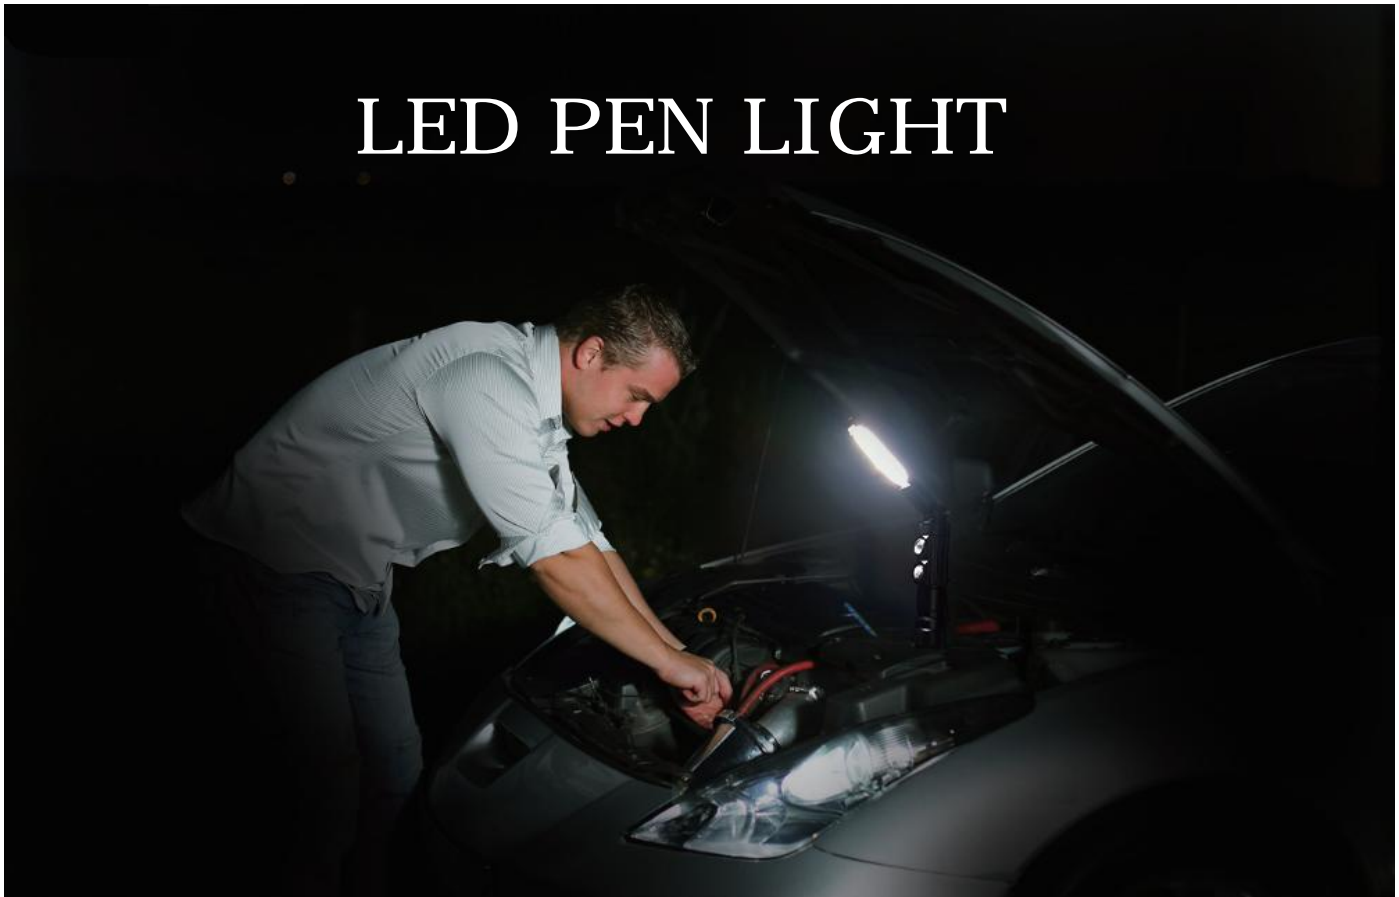

ET5-E025

- ◆ The main body of tough ABS and rubber materials
- ◆ With transparent cover
- ◆ 1 pcs 3 w COB high - luminance LED in the front - 180~200 lm ; 50 ~ 60 Mins
- ◆ Power by 1S1P 10440 rechargeable Li - ion batteries (3.7 V 300 mAh) inside
- ◆ Included 0.8 M Micro USB cord
- ◆ GS AC home charger (No included)
- ◆ Charging time: 30mins if input 5 V 1 A
- ◆ Overcharge & Overdischarge protection
- ◆ Charging indication at the bottom
(Red LED indicator turns green after fully charged)
- ◆ Strong magnet in the clip to attract iron object
- ◆ Discretionary adjust lighting direction by rotatable clip (180°)
- ◆ Ideal optical and no screw design
- ◆ Surface with rubber spray - painting feels good
- ◆ On / off switch on the top
- ◆ Different color available



ET5-E026

- ◆ The main body of tough ABS and rubber materials
- ◆ With transparent cover
- ◆ 1 PCS 3 w COB high - luminance LED in the front - 200 lm
- ◆ Power by 3 pcs AAA batteries (not included)
- ◆ Strong magnet in the clip to attract iron object
- ◆ Discretionary adjust lighting direction by rotatable clip (180°)
- ◆ Ideal optical and no screw design
- ◆ Surface with rubber spray - painting feels good
- ◆ Camo color are optional (not included)
- ◆ Different color available
- ◆ On / Off switch on the top





ET5-E041

Material: ABS
 Color: Orange / Blue / Black / Red
 Power: 8 w COB
 LED: CREE
 Power supply: 2200 mAh
 Protection class: IP 67
 Voltage: DC 5 V
 Working time: 3.5 - 20 hours
 Output: 10 - 600 lm



ET5-E043

Material: Aluminum Alloy
 Color: Black
 Power: 6 w + 5 w
 LED: COB + XPE lamp beads
 Voltage: 10 - 30 V
 Operating time: Glare 2 H
 Weight: 92 g
 Effective distance: 50 M or more
 Lumens: 800 lm
 Size: Extension length : 21.5 x 2 x 2.5 cm
 Folded length extension length : 11.5 x 2 x 2.5 cm
 Battery: 123 lithium battery (built-in) USB charging
 Function: 5 levels of main light (strong + weak) +1 level of side

Remarks

Light (yellow light) + main light (red light + red light flash)
 Move up and down,there is a magnet at the tail,
 often press 2 seconds to automatically turn off the light



ET5-E044

Material: PC
 Power: 60 w
 Color: Black
 LED: Epistar
 Lumens: 220 lm
 Battery: 1200 mAh



ET6-B018

Material: PC
 Color: Pink / White / Blue / Black
 LED Power: 2 w
 LED Type: Customize
 Beam Angle: Spot (30°) / Flood (60°)





ET5-E027

- ◆ The main body of tough ABS materials
- ◆ With transparent cover
- ◆ 1 pc UV COB high - power LED in the front
--- (Electricity power:3W;Optical Radiant Power:650 ~ 750 mW;Wavelength: 395 - 405 nm; Run time:90~100Mins)
- ◆ Power by 3 pcs AAA batteries (not included)
- ◆ Strong magnet in the clip to attract iron object
- ◆ Discretionary adjust lighting direction by rotatable clip (180°)
- ◆ Ideal optical and no screw design
- ◆ Surface with rubber spray - painting feels good
- ◆ Camo color are optional (not included)
- ◆ Different color available
- ◆ On / off switch on the top



ET5-E074

Material	Aluminum alloy + ABS + PC
LED	3 w COB
Color	Black
Battery	3 x AAA dry battery (not include)
Dimension	16 x 3 x 16 cm
Net weight	60 g
Gross weight	90 g
Brightness	220 lm



ET5-E076

Material	ABS
Color	Black + orange black + red black + blue black (Customizable color)
LED	3 w COB on body + 1 w LED on head
Battery	14500
Dimension	18.5 x 2 x 3.5 cm
Electric current	800 mAh
Function	100 % brightness / Flashing\
Net weight	55 g
Gross weight	85 g
Qty / carton	12 pcs
N.W	8 kgs
G.W	10 kgs
Carton size	49 x 39 x 38 cm



ET5-E076-1

Material	ABS
Color	Black + orange black + red black + blue black (Customizable color)
LED	3 w COB on body + 1 w LED on head
Battery	Built - in 3 x AAA battery ,(not included)
Dimension	18.5 x 2 x 3.5 cm
Electric current	800 mAh
Function	100 % brightness / Flashing\
Net weight	55 g
Gross weight	85 g
Qty / carton	12 pcs
N.W	8 kgs
G.W	10 kgs
Carton size	49 x 39 x 38 cm





ET5-E077

Material	ABS+AL
Color	Black + orange black + red black + blue black (Customizable color)
LED	3 w COB on body + 3 w LED on head
Battery	14500
Dimension	20 x 2.5 x 4 cm
Electric current	1200 MAH
Net weight	84.5 g
Gross weight	11.4 g
Qty / carton	50 pcs
N.W	12 kg
G.W	16 kg
Measurement / carton	47 x 40.5 x 27.5 cm



ET5-E077-1

Material	ABS+AL
Color	Black + orange black + red black + blue black (Customizable color)
LED	3 w COB on body + 3 w LED on head
Battery	Built - in 3 x AA battery ,(not included)
Dimension	20 x 2.5 x 4 cm
Electric current	1200 MAH
Net weight	84.5 g
Gross weight	11.4 g
Qty / carton	50 pcs
N.W	12 kg
G.W	16 kg
Measurement / carton	47 x 40.5 x 27.5 cm



ET5-E078

Material	Aluminium alloy
Color	Black
LED	3w COB (Body) 1 w LED (Torch)
Electric current	600 mAh
Brightness	About 400 lm (Boost in30s) 250 lm (high) / 120 lm (Low) / 100 lm (Torch)



ET5-E079

Material	ABS
Color	Black + orange black + red black + blue black (Customizable color)
LED	3 w COB
Dimension	16.3 x 3.2 x 1.8cm
Packaging dimension	17.2 x 3.5 x 2.0 cm
Net weight	36.2 g
Gross weight	66.2 g
Lumens	COB 3Watt, 120Lumens
Electric current	1200 mAh
Battery	Built - in 3 x AAA battery ,(not included)
Qty / carton	240 pcs
N.W	3.6 kg
G.W	5 kg
Measurement / carton	39 x 33 x 38 cm





ET5-E042

Material	ABS
Color	Red
LED	1 w + 3 w COB
Dimension	21.6 x 5.6 x 4.7 cm
Packaging dimension	6.2 x 5.5 x 22.5 cm
Net weight	159 g
Battery	Built-in 3 x AAA battery ,(not included)
Qty / carton	1000 pcs
N.W	19.1 kg
G.W	20 kg
Measurement / carton	55 x 28 x 31.5 cm



ET5-E080-1

Material	ABS
Color	Black + orange black + red black + blue black (Customizable color)
LED	3 w COB
Dimension	17 x 3.3 x 1.8 cm
Packaging dimension	17.2 x 3.5 x 2.0 cm
Net weight	35 g
Gross weight	85 g
Battery	Built-in 3 x AAA battery ,(not included)
Qty / carton	240 pcs
N.W	8.5 kg
G.W	10 kg
Measurement / carton	39 x 33 x 38 cm



LED FLASH LIGHT

High Power
HIGH BRIGHTNESS 200m





ET5-F022A

Material ABS+ aluminum alloy
 LED XHP50 LED XHP70 LED
 Color Black
 Input Voltage DC 5 V 1A
 Working mode 100%-50%-25%-flash-SOS (any gear long press to shut down)
 IP Rate IP 34
 Battery Built - in 3 x AAA battery ,(not included)
 Product Dimension 15.7*4*2.8CM



ET5-F023A

Material PC
 LED 3 w COB
 Color Silver / Red / Yellow
 Input Voltage DC 5 V
 Working mode Strong light - Low light - Flash - Side COB light
 Lumens 2000 lm
 IP Rate IP X6
 Battery 21700 (1200mAh)
 Product Dimension 17.5 x 5.5 x 7 cm
 Product box dimension 16.8 x 6.6 x 5 cm
 Product weight 122 g
 Master box dimension 55 x 38.5 x 58.5 cm
 Master box Quantity 150 pcs



ET5-F022

Material Alloy
 LED 36 w P90
 Color Black
 Input Voltage DC 5 V
 Working mode 5modes (low light - middle light - strong light - strobe - SOS)
 Lumens 2000 lm
 IP Rate IP 34
 Battery 1*26650 (3700mAh)
 Product Dimension 15.9 x 4 x 3.5 cm
 Product box dimension 9.2 x 5 x 23.5 cm
 Product weight 302 g
 Master box dimension 48 x 27 x 44.5 cm
 Master box Quantity 50 pcs
 Net weight 15.25 kg
 Gross weight 16.25 kg



ET5-F023


Material Aluminum
 LED 36 w P90
 Color Black
 Input Voltage DC 5 V
 Working mode 5modes front light(Low>Middle>High>Strobe>SOS)
 Lumens 3000 lm
 IP Rate IP 34
 Battery 26650 (3700 mAh)
 Product Dimension 15.8 x 4.1 x 3.4 cm
 Product box dimension 8 x 4 x 20.3 cm
 Product weight 190 g
 Master box dimension 42 x 42 x 43.5 cm
 Master box Quantity 100 pcs
 Net weight 19 kg
 Gross weight 20 kg






ET5-F024

Material	ABS +Alloy
LED	5 w Jingrui XG2 LED
Color	Black
Input Voltage	DC 5 V
Working mode	4modes (Strong > Mid > Weak > keep pressing for 2s to reach SOS mode,sensor distance 5 cm)
Lumens	2000 lm
IP Rate	IP 34
Battery	26650 (3700mAh)
Product Dimension	12.7 x 2.8 x 2.5 cm
Product box dimension	8 x 4 x 20.3 cm
Product weight	58 g
Master box dimension	42 x 42 x 43.5 cm
Master box Quantity	100 pcs
Net weight	5.8 kg
Gross weight	6.8 kg

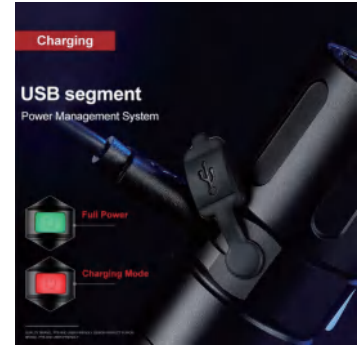

ET5-F025

Material	6061-T6 aviation aluminum
LED	5 w SH-U08
Color	Black
Input Voltage	DC 5 V
Working mode	5modes (Low > Middle > High > Strobe > SOS)
Lumens	500 lm / 219lm
IP Rate	IP 34
Battery	1*18650 / 2*16340 / 2*CR123A rechargeable Li-ion battery
Product Dimension	13 x 3.3 x 2.2 cm
Product box dimension	9.2 x 5 x 23.5 cm
Product weight	100 g
Master box dimension	48 x 27 x 44.5 cm
Master box Quantity	50 pcs
Net weight	5 kg
Gross weight	6 kg

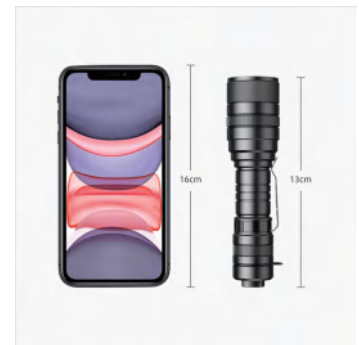

LED SEARCH LIGHT



Bright Light

Sees everything

In The Light

Patrolling light

Vivid Flash

Get attention in any emergency



ET5-G059

LED	LED
Power	2 x18 w
Color	Black
Voltage	8.4 V 1 A
Beam	Spotlight



ET5-G061

LED	Jingrui XG2 LED
Power	3 w
Color	Black
Input Voltage	DC 10 - 30 V
Working mode	3 modas (Strong Light - Low Light - Strobe)
Lumens	300 lm
IP Rate	IP 44
Material	ABS
Battery capacity	2*18650 (1200 mAh)
Product size	19.7 x 9.9 x 13.9 cm



ET5-G062

LED	SZ140T/ 2835
Power	5 w
Color	Black
Input Voltage	DC 10 - 30 V
Working mode	Front lamp 3 modes High>Weak>Strobe Side lamp white light 2 modes (High>Weak) tail red light 3 modes (steady>Strobe >marquee)
Lumens	550 lm
IP Rate	IP 31
Material	ABS
Battery capacity	4*18650 (6000 mAh)
Product size	17.5 x 4.6 x 3.5 cm



ET5-G063

LED	SZ140T/ 2835
Power	5 w
Color	Black
Input Voltage	DC 10 - 30 V
Working mode	Front lamp 3 modes High>Weak>Strobe Side lamp white light 2 modes (High>Weak) tail red light 3 modes (steady>Strobe >marquee)
Lumens	550 lm
IP Rate	IP 31
Material	ABS
Battery capacity	4*18650 (6000 mAh)
Product size	17.5 x 4.6 x 3.5 cm





ET5-G064

LED	SST-40-N4
Power	9.4 w
Color	Black
Input Voltage	DC 10 - 30 V
Working mode	5 modes (High > Med > Low > Strobe > SOS)
Lumens	900 lm
IP Rate	IP 31
Material	ABS
Battery capacity	4*18650 (1500 mAh)
Product size	20 x 9.5 x 9.4 cm



ET5-G065

LED	SZ140T/ 2835
Power	5 w
Color	Black
Input Voltage	DC 10 - 30 V
Working mode	Front lamp 5 modes High>Weak>Strobe Side lamp white light 2 modes (High>Weak) side red light 2 modes (steady>Strobe)
Lumens	900 lm
IP Rate	IP 31
Material	ABS
Battery capacity	3*18650 (3900 mAh)
Product size	20.3 x 9 x 14.3 cm



ET5-G066

LED	SZ140T/ 2835
Power	5 w
Color	Black
Input Voltage	DC 10 - 30 V
Working mode	4modes(Strong light-Low light-Strobe-SOS)
Lumens	230 lm
IP Rate	IP 41
Material	ABS
Battery capacity	2*18650 (1200 mAh)
Product size	20.8 x 12 x 11.7 cm



LED INDOOR LIGHTING



DPLUS GLOBAL



ET12-A001

LED Power	18 w COB
LED type	Bridgelux Chip
Colour	Silver / White / Black / Others
Input Current	AC 85 V - 265 V 50 - 60 Hz
Output	DC 12 - 26 V
Flash mode / mode	Light up the lighting
Lumens	2300 lm
IP Rate	IP 44
Color temperature	6000 ~ 6500 K
Net weight	1686 g
Gross weight	1827 g
Product Dimension	11.7 x 14 x 35.7 cm
Carton size	40.5 x 15.5 x 14.3 cm
Inner box size	40 x 33 x 29 cm
Master box Quantity	6 pcs
Weight	11.00 kg



ET12-A002

LED Power	12 w COB
LED type	Bridgelux Chip
Colour	Silver / White / Black / Others
Input Current	AC 85 V - 265 V 50 - 60 Hz
Output	DC 12 - 26 V
Flash mode / mode	Light up the lighting
Lumens	2300 lm
IP Rate	IP 44
Color temperature	6000 ~ 6500 K
Product Dimension	11.7 x 14 x 24 cm
Carton size	24.8 x 12.8 x 14.8 cm
Inner box size	50 x 37 x 30 cm
Master box Quantity	12 pcs



ET12-A003

LED Power	6 w COB
LED type	Silver / White / Black, Others
Colour	White / Black
Input Current	AC 220 V
Output	DC 12 - 26 V
Flash mode / mode	Light up the lighting
Lumens	2300 lm
IP Rate	IP 44
Color temperature	6000 ~ 6500 K
Product Dimension	9.7 x 9.7 x 1.4 cm
Carton size	14.8 x 10.8 x 10.8 cm
Inner box size	46 x 34 x 3.4 cm
Master box Quantity	27 pcs



Accessories - Charging Station



ET8-C001

AC output	220 V
Maximum power	10 w correction wave
DC output	12 V 10 A
USE - C output	5 - 9 V 2 A
USB	QC 3.0, 2.1 A
Battery capacity	155 WH
Charge	Adapter 15 V 2 A 7 - 8 hours
USB output	2 x USB 5 V 2.1 A
	1 x USB QC 3.0 / 9 V 2 A
	Quick charge 18W
TYPE - C	15 V 2 A
DC input	



ET8-C002

AC output	220 V
Maximum power	300 w sine wave
DC output	12 V 10 A
PD output	100 w
Measure	15.5 x 7 x 7.5 cm
Weight	1.58 kg / 2.86 kg
Input voltage	DC 5 V ~ 24 V
Charging method	15 V 4 A adapter charging
	Solar panel charging
	PD 100 w rapid charging





ET8-C003

LED light	6 w
AC output	220 V
Maximum power	300 w sine wave
DC output	24 V 10 A
PD output	100 w
Measure	29 x 18.8 x 17 cm
Weight	1.58 kg / 2.86 kg
Input voltage	DC 5 V ~ 24 V
LED	150 w 1.2 kg / 300 w 2.86 kg
	/ 500 w 6.35 kg
Capacity	17000 mAh / 500 WHR - 117000 mAh
	/ 500 WHR
Texture of wood	Personal computer
DC input	25.3 volts / 3 amperes max
DC output	24 V / 10 A 240 w max
Certification	FCC CE



Accessories - Industrial parts




Accessories

These comes in different strength and shape Ask us for an offer for your specific magnet



ET8-A002

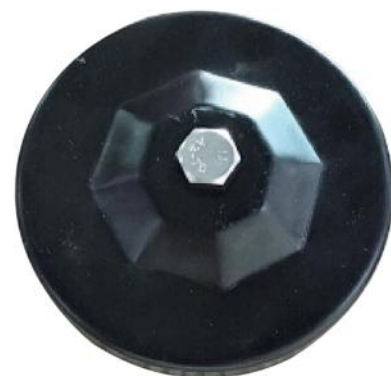

ET8-A016

Any shapes or sizes, please contact us !



ET8-A003

Accessories - Magnet



ET8-A004

Accessories - Magnet

Accessories - PCB



These comes in different material, thickness, sizes and programs
Ask us for an offer for your specific PCB



Accessories - PCB

Accessories - PCBA

Each product has it own specific PCBA
Ask us for an offer for your specific PCBA

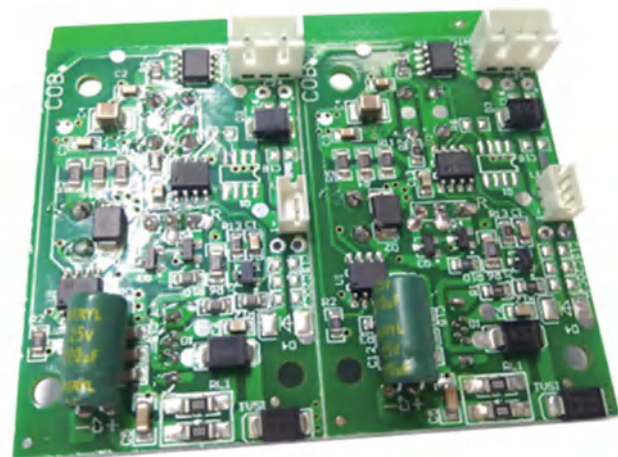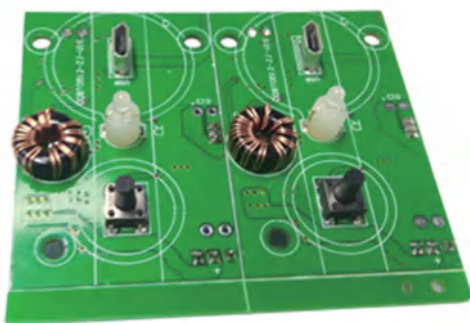

Accessories - PCBA

Accessories - Brackets

These comes in different shapes and for different purpose
 Have a look at our website to find others.
 You are welcome to ask us for an offer for your specific brackets.



ET8-G001

Accessories - Brackets

Model	Material	Application
ET8-G001	Stainless steel	LED light bar bracket for Chevy and Dodge



ET8-G014

Accessories - Brackets

Model	Material	Application
ET8-G014	Stainless steel	1999-2014 Ford F250 / F350 Superduty / 2000-2005 Ford Excursion



ET8-A034



ET8-A033

Accessories - Car Plug



ET8-A035

Accessories - Adapter



ET8-A036

Accessories - USB



ET8-A037

Accessories - Type C

Japanese charging head, -----> Adapter Japanese



ET8-A038

Accessories-Japanese charging head

Adapter USA



ET8-A039

Accessories - Adapter USA



ET8-B008

Accessories - Plug Swiss



ET8-B009



ET8-B010

Accessories - Adapter for Hanger